




Rexroth Tightening Systems

Easy Automation. Efficient Production.



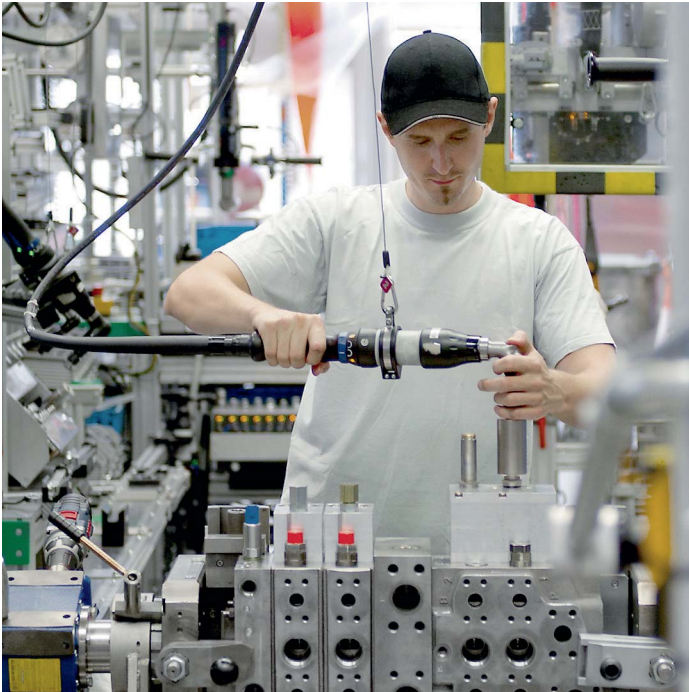

Tightening spindles 0.6 –1000 Nm	8
Tightening spindles size 2	12
Tightening spindles size 3	28
Tightening spindles size 4	48
Tightening spindles size 5	68
Accessories for tightening spindles	76
Customized solutions	78
ErgoSpin hand-held nutrunners	80
Accessories for ErgoSpin / CC-ErgoSpin hand-held nutrunners	92
Nexo – intelligent cordless nutrunners	98
Accessories and extensions	102
Control and power electronics	108
Interface modules	130
Cables	134
Software and operating system	142
Rating of a tightening connection	150
Clamping force table	151
Glossary	152
Further Information	154


Clever, flexible, secure: Rexroth tightening technology

Fieldbus connection via Rexroth interface modules

- ▶ PROFIBUS DP
- ▶ DeviceNet
- ▶ PROFINET IO
- ▶ Modbus TCP
- ▶ EtherNet/IP
- ▶ EtherCat

Ethernet-based data/ control protocols


- ▶ TP protocols
- ▶ Open protocol
- ▶ VW-XML protocol
- ▶ IPM protocol
- ▶ CAQTNG
- ▶ PLUS protocol
- ▶ QDA protocol
- ▶ HTTP

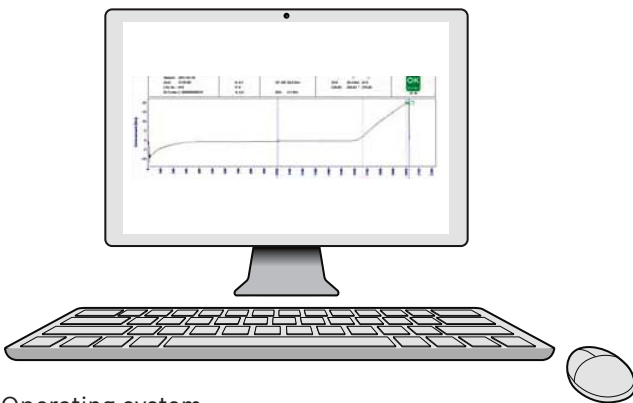


Operating system

Advantages of the software


- ▶ All in one software package includes an extensive and userfriendly statistics package.
- ▶ System installation and programming of individual tightening tasks is done via convenient, icon-supported tools.
- ▶ 180 curves are available for an analysis of the tightening joints.
- ▶ Step by step programming structure allows for a logical breakdown of the tightening rundown and easy identification where an issue occurs in the rundown process.
- ▶ Individual solutions such as worker guides can be found under "Customized solutions" on page 78.



Graph



Good range window



Histogram


ID	Name	Status	Date	Program
1000	1000	OK	2016-09-27 11:02:38	1000
1001	1001	OK	2016-09-27 11:02:38	1000
1002	1002	OK	2016-09-27 11:02:38	1000
1003	1003	OK	2016-09-27 11:02:38	1000
1004	1004	OK	2016-09-27 11:02:38	1000
1005	1005	OK	2016-09-27 11:02:38	1000
1006	1006	OK	2016-09-27 11:02:38	1000
1007	1007	OK	2016-09-27 11:02:38	1000
1008	1008	OK	2016-09-27 11:02:38	1000
1009	1009	OK	2016-09-27 11:02:38	1000
1010	1010	OK	2016-09-27 11:02:38	1000
1011	1011	OK	2016-09-27 11:02:38	1000
1012	1012	OK	2016-09-27 11:02:38	1000
1013	1013	OK	2016-09-27 11:02:38	1000
1014	1014	OK	2016-09-27 11:02:38	1000
1015	1015	OK	2016-09-27 11:02:38	1000
1016	1016	OK	2016-09-27 11:02:38	1000
1017	1017	OK	2016-09-27 11:02:38	1000
1018	1018	OK	2016-09-27 11:02:38	1000
1019	1019	OK	2016-09-27 11:02:38	1000
1020	1020	OK	2016-09-27 11:02:38	1000
1021	1021	OK	2016-09-27 11:02:38	1000
1022	1022	OK	2016-09-27 11:02:38	1000
1023	1023	OK	2016-09-27 11:02:38	1000
1024	1024	OK	2016-09-27 11:02:38	1000
1025	1025	OK	2016-09-27 11:02:38	1000
1026	1026	OK	2016-09-27 11:02:38	1000
1027	1027	OK	2016-09-27 11:02:38	1000
1028	1028	OK	2016-09-27 11:02:38	1000
1029	1029	OK	2016-09-27 11:02:38	1000
1030	1030	OK	2016-09-27 11:02:38	1000
1031	1031	OK	2016-09-27 11:02:38	1000
1032	1032	OK	2016-09-27 11:02:38	1000
1033	1033	OK	2016-09-27 11:02:38	1000
1034	1034	OK	2016-09-27 11:02:38	1000
1035	1035	OK	2016-09-27 11:02:38	1000
1036	1036	OK	2016-09-27 11:02:38	1000
1037	1037	OK	2016-09-27 11:02:38	1000
1038	1038	OK	2016-09-27 11:02:38	1000
1039	1039	OK	2016-09-27 11:02:38	1000
1040	1040	OK	2016-09-27 11:02:38	1000
1041	1041	OK	2016-09-27 11:02:38	1000
1042	1042	OK	2016-09-27 11:02:38	1000
1043	1043	OK	2016-09-27 11:02:38	1000
1044	1044	OK	2016-09-27 11:02:38	1000
1045	1045	OK	2016-09-27 11:02:38	1000
1046	1046	OK	2016-09-27 11:02:38	1000
1047	1047	OK	2016-09-27 11:02:38	1000
1048	1048	OK	2016-09-27 11:02:38	1000
1049	1049	OK	2016-09-27 11:02:38	1000
1050	1050	OK	2016-09-27 11:02:38	1000
1051	1051	OK	2016-09-27 11:02:38	1000
1052	1052	OK	2016-09-27 11:02:38	1000
1053	1053	OK	2016-09-27 11:02:38	1000
1054	1054	OK	2016-09-27 11:02:38	1000
1055	1055	OK	2016-09-27 11:02:38	1000
1056	1056	OK	2016-09-27 11:02:38	1000
1057	1057	OK	2016-09-27 11:02:38	1000
1058	1058	OK	2016-09-27 11:02:38	1000
1059	1059	OK	2016-09-27 11:02:38	1000
1060	1060	OK	2016-09-27 11:02:38	1000
1061	1061	OK	2016-09-27 11:02:38	1000
1062	1062	OK	2016-09-27 11:02:38	1000
1063	1063	OK	2016-09-27 11:02:38	1000
1064	1064	OK	2016-09-27 11:02:38	1000
1065	1065	OK	2016-09-27 11:02:38	1000
1066	1066	OK	2016-09-27 11:02:38	1000
1067	1067	OK	2016-09-27 11:02:38	1000
1068	1068	OK	2016-09-27 11:02:38	1000
1069	1069	OK	2016-09-27 11:02:38	1000
1070	1070	OK	2016-09-27 11:02:38	1000

Results window

Rexroth offers precise tightening technology – tools, control systems and the corresponding accessories – for all key tightening tasks in a wide variety of industries: from the intelligent cordless nutrunner, the ergonomic hand-held nutrunner, to the versatile tightening spindles and even the fully automatable tightening system.



- ▶ Process Quality Manager
- ▶ Production Performance Manager

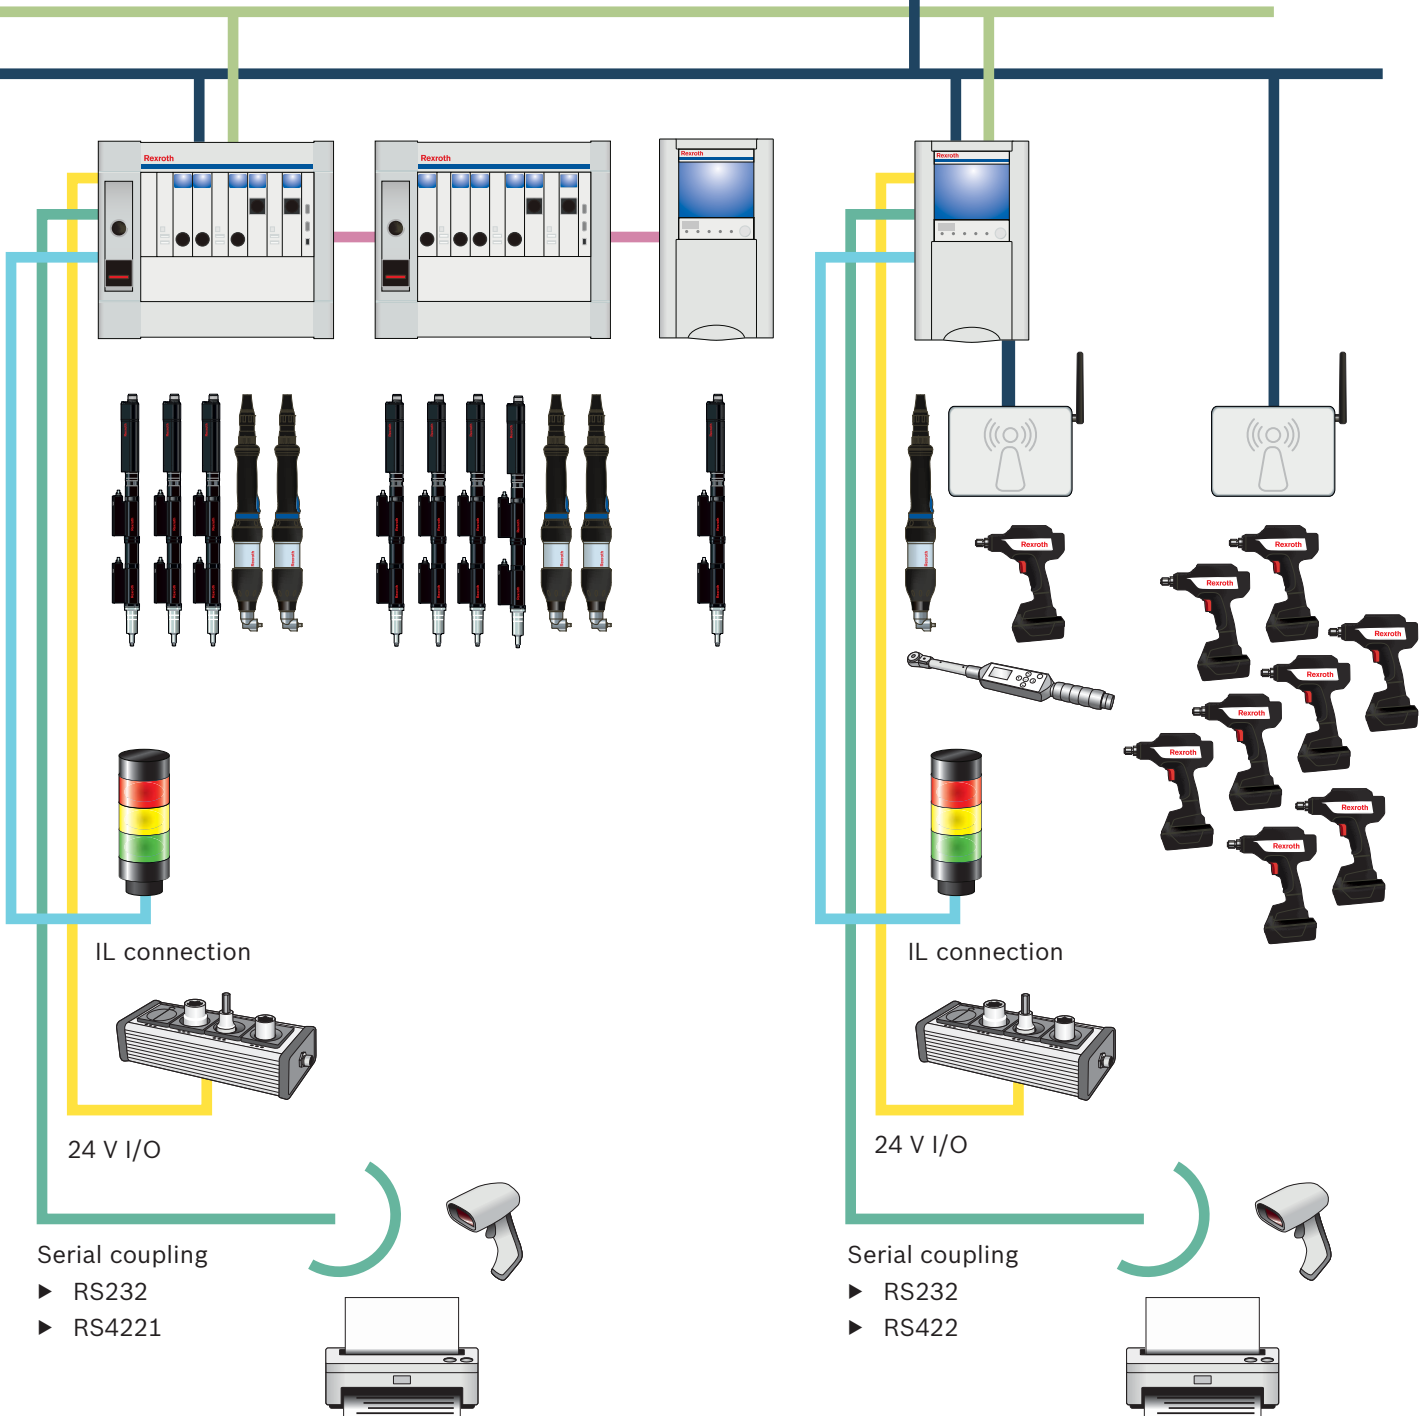

Industry 4.0 solutions for industrial tightening technology

Industry 4.0 changes the world of production and connects the real world of machines to the virtual world (Internet of Things, IoT). Bosch Rexroth uses its expertise as an operator in its own plants and as a provider of intelligent drive and control technologies to develop and expand its Industry 4.0 solutions. Initial results show the advantages. Among them are higher productivity, a variable production including a batch size of 1 and more efficient human-machine interaction. This strong base creates new value networks and allows Industry 4.0 to become a reality in your company.

**Connected
Automation**
i4.  **now**

In the area of industrial tightening technology, we are offering hardware and software solutions for the Internet of Things that are market-ready, available, and successfully being used by customers right now. One example: The Rexroth Nexo cordless nutrunner fits in networked environments simply by using the integrated control, without the need for additional control hardware, and communicates wirelessly with the higher-level systems.

The Process Quality Manager from Bosch Software Innovations supports early detection of problems in your production process, notifying the responsible production managers and providing analyses. As a result, your technical experts can take prompt measures to counteract deviation trends in the target process, preventing production stops and the production of defective parts. The Process Quality Manager will help you to take a major step towards the goal of zero defect production.

You process data can be saved locally at your production facility or on the Bosch IoT Cloud. The Bosch IoT Cloud can collect, save, and analyze your data and make it available in a timely manner worldwide. The Bosch IoT Suite is the technological basis for IoT applications and integrates all the necessary functions to integrate devices, users, companies, and partners. The objective? An efficient development of innovative and future-oriented solutions for the networked world.

Additionally, the efficiency and quality of your production can be increased by networking tools. With "Track and Trace", for example, it is possible to determine the exact position of the Nexo cordless nutrunner inside the workshop. Based on this position determination and the known placement of the component to be tightened, the relevant tightening program can be automatically selected and released. A single tightening result can then be assigned precisely to a single tightening connection.



We move everything:
Let Bosch Rexroth help you connect to
industry 4.0. Now!

We're ready to help you drive the development of smart
industry solutions.
i4.0@boschrexroth.com

Tightening spindles 0.6 – 1000 Nm

The modular construction of Rexroth tightening spindles enables a very precise adjustment to the tightening task at hand. Conformity with the VDI standard ensures that your tightening connections meet the highest safety requirements. The versatility of Rexroth tightening spindles not only guarantees safety but also a perfect design customized to your needs.



- ▶ Modular design, ideal adjustment to tightening case
- ▶ Maintenance-free for 1 million full-load cycles, long service life
- ▶ Process reliability and minimal waste thanks to real redundancy measurement
- ▶ Digital measurement transfer, maximum precision
- ▶ Largest working range
- ▶ Assured accuracy of 10 – 100 percent of the nominal torque within the working range

Maximum flexibility in tightening spindle configuration – here are just some of the many options



Tightening spindle with angle head

- ▶ For high accessibility
- ▶ Also available with integrated measurement transducer



Tightening spindle with off set output drive

- ▶ For side-by-side arrangement with small center-to-center distances
- ▶ Also available with integrated measurement transducer



Tightening spindle with transverse gearbox

- ▶ Compact length
- ▶ Available for all sizes



Tightening spindle with feed output drive



- ▶ Integrated feed movement
- ▶ For use in connection with automatic bolt supply

Configure your tightening spindle

Numerous options

With a working range between 0.6 and 1000 Nm (higher torques on request) and a choice between straight output drives, offset output drives, feed output drives, and angle heads – with Rexroth components you can configure a tightening spindle that is customized to your individual requirements. We offer the offset output drive and angle head also with integrated measurement transducer. You can decide between having just one measurement transducer or working with an additional second redundant one. We can provide the optimum spindle components for any task. Why not find the perfect tightening spindle for your tightening connection?

Depending on the size, the actual components may differ from those in the illustration.

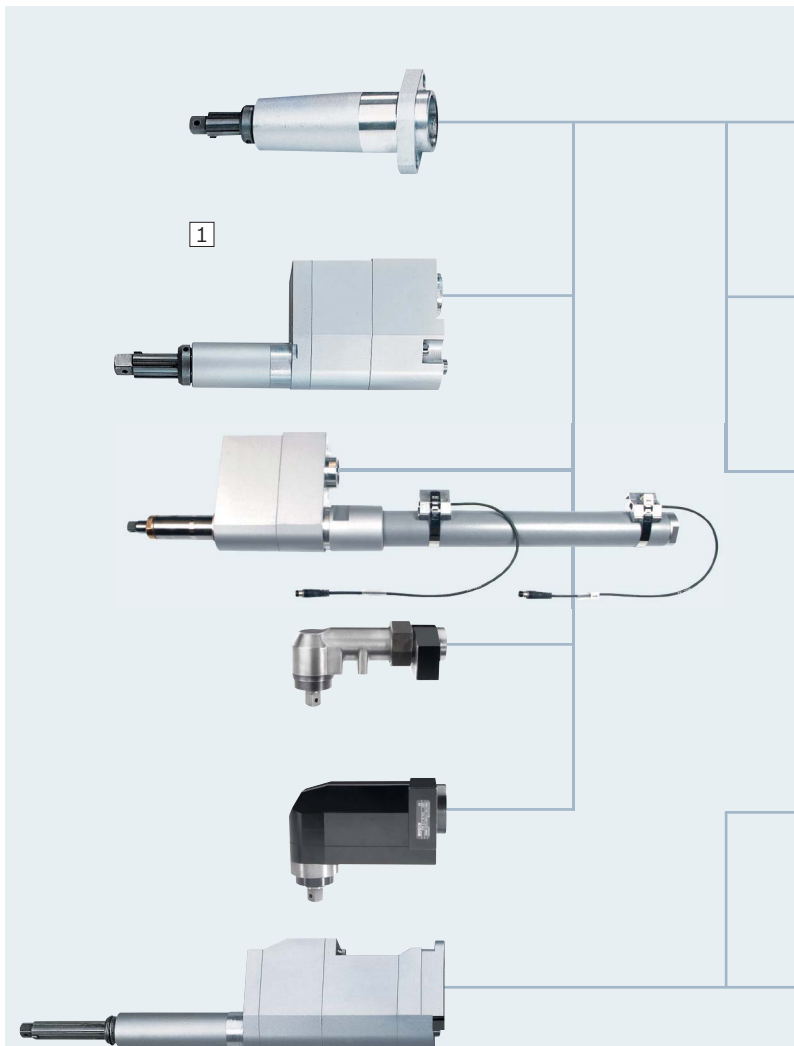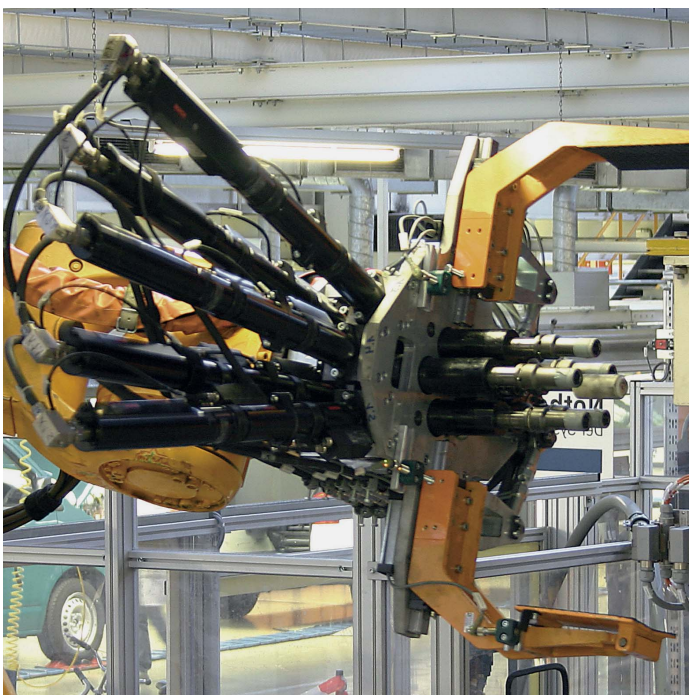


1 Output drives

- The suitable output drive for every tightening position
- Special output drives for increased transverse forces, e.g. for wheel nutrunners, on request

2 Adapter A

- Connects planetary gearbox and output drive when operating without a measurement transducer

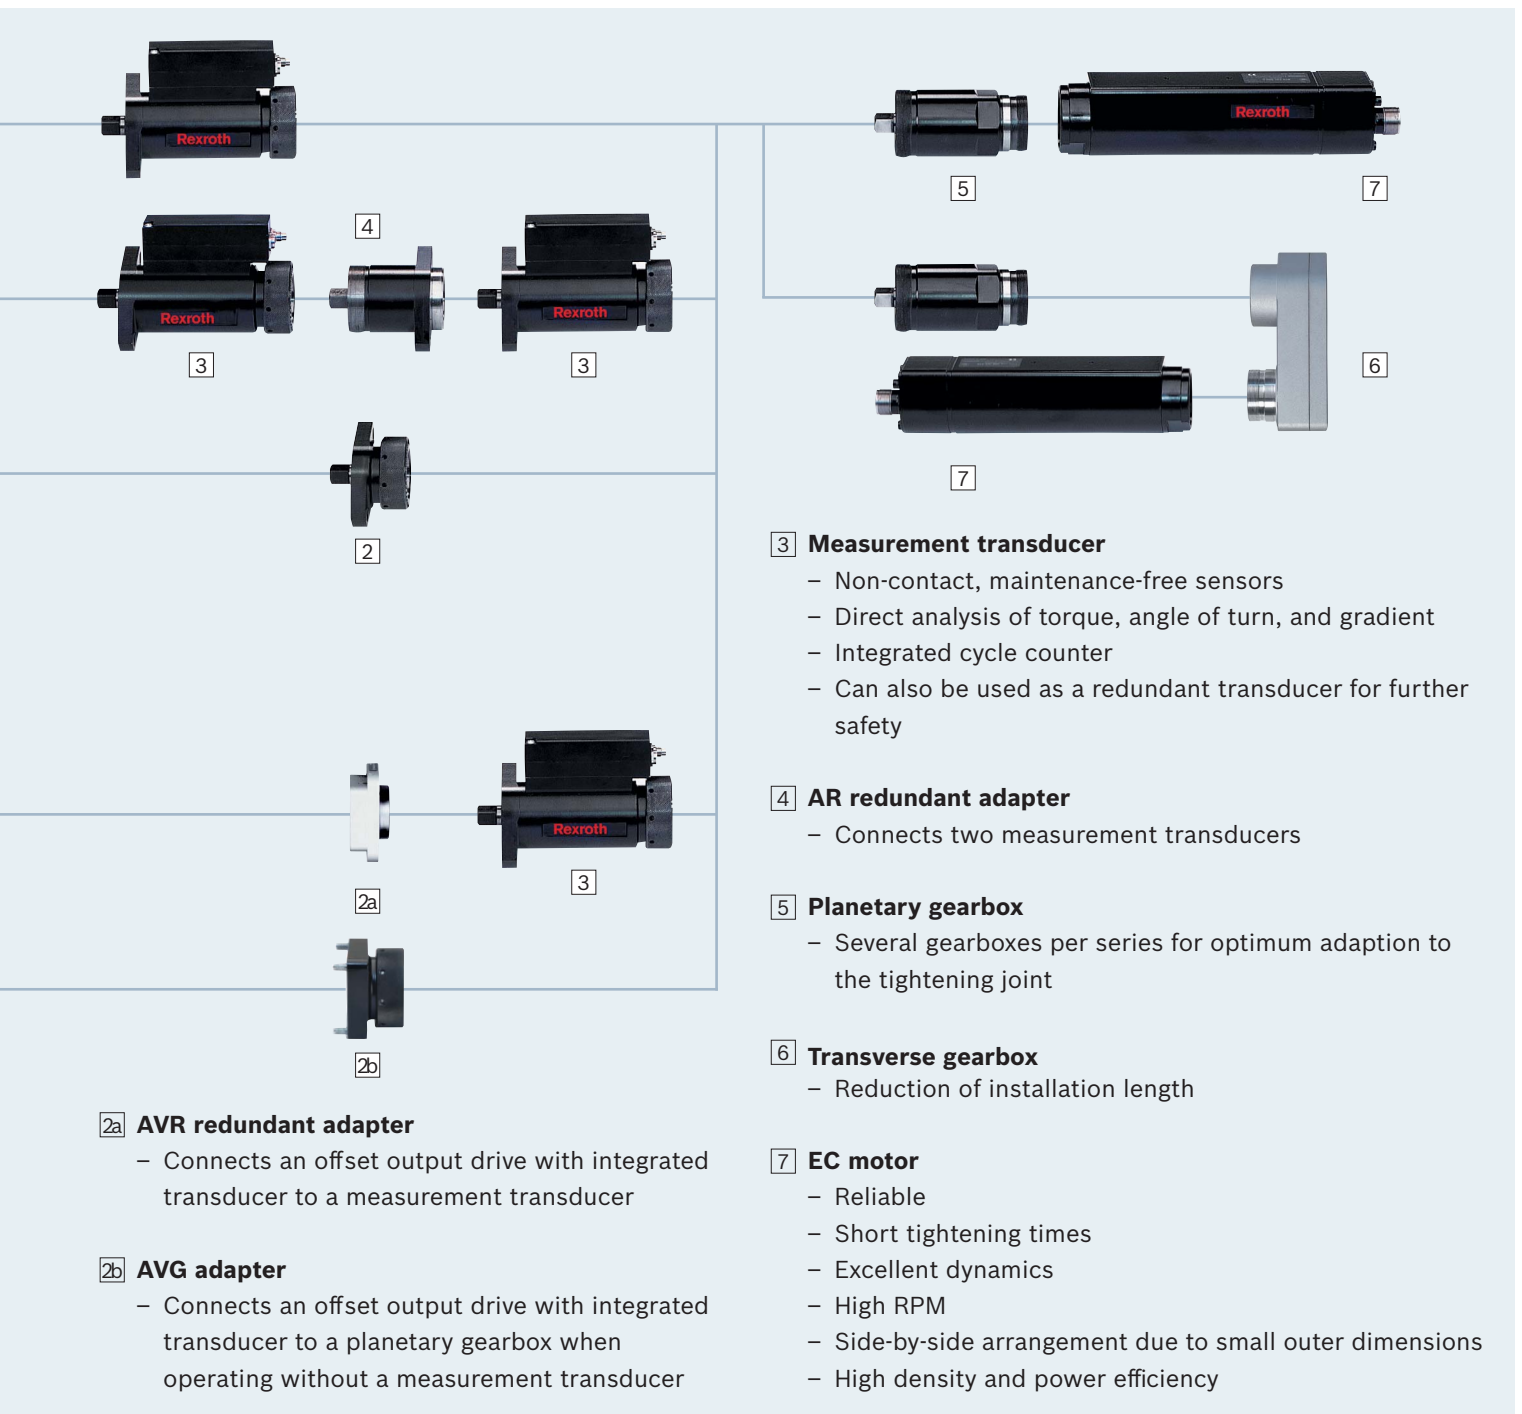

Tightening spindles size 2 Spindle bearing



- ▶ Working range 0.6 – 10 Nm
- ▶ Max. output drive speed 1000 rpm

Depending on the size, the actual components may differ from those in the illustration.

Features


- ▶ Various lengths with axial compensator
- ▶ Standard tool mounts
- ▶ Maximum efficiency
- ▶ Easy assembly due to flange connection
- ▶ Maintenance-free for 1 million full-load cycles





Tightening spindle		Spindle bearing				Measurement transducer	Planetary gearbox	EC motor
Working range *	Max. output drive speed	Range of spring mm/ Max. spring force N	Tool mount	Code	Order no.	Code / Order no.	Code / Order no.	Code / Order no.
Nm	rpm							
0.6–5.5	1000	20/ 34.1	1/4" square drive	2GA82	0 608 800 077	2DMC006 0608 820 110	2GE19 0608 720 043	EC302 0608 701 016
	1000	20/ 34.1	1/4" quick-change chuck	2GB82	0 608 800 078			
	1000	20/ 34.1	1/4" quick-change chuck	2GB82F73	0 608 800 085			
	780	20/ 34.1	1/4" square drive	2GA82	0 608 800 077	2DMC006 0608 820 110	2GE26 0608 720 038	
	780	20/ 34.1	1/4" quick-change chuck	2GB82	0 608 800 078			
	780	20/ 34.1	1/4" quick-change chuck	2GB82F73	0 608 800 085			
1.2–10	1000	20/ 34.1	1/4" square drive	2GA82	0 608 800 077	2DMC012 0608 820 111	2GE19 0608 720 043	EC302 0608 701 016
	1000	20/ 34.1	1/4" quick-change chuck	2GB82	0 608 800 078			
	1000	20/ 34.1	1/4" quick-change chuck	2GB82F73	0 608 800 085			
	780	20/ 34.1	1/4" square drive	2GA82	0 608 800 077	2DMC012 0608 820 111	2GE26 0608 720 038	
	780	20/ 34.1	1/4" quick-change chuck	2GB82	0 608 800 078			
	780	20/ 34.1	1/4" quick-change chuck	2GB82F73	0 608 800 085			


* The accuracy within the working range is $\pm 2\%$ over 6 s.

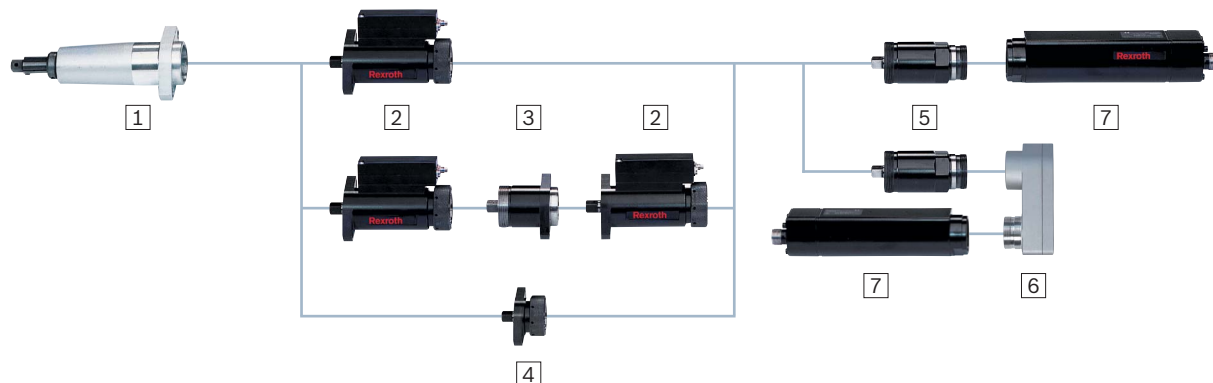




Note: You can find component dimensions and 3D/CAD data on the Internet at www.boschrexroth.com/tightening

Spindle bearing size 2
Components



1 Spindle bearing 	Code	2GA82	2GB82	2GB82F73	
	Order no.	0608800077	0608800078	0608800085	
	Max. torque	Nm	10	10	10
	Range of spring	mm	20	20	20
	Spring force	N	16–34	16–34	22–73
	Reduction		1	1	1
	Avg. efficiency		1	1	1
	Length A	mm	82	82	82
	Installation length	mm	90	90	90
	Weight	kg	0.2	0.2	0.2
2 Measurement transducer 	Code	2DMC006	2DMC012		
	Order no.	0608820110	0608820111	You can configure your tightening spindle with a redundant measurement transducer from the same type. Connect both measurement transducers with the redundant adapter. For measurement transducer cables, see page 138.	
	Nominal torque	Nm	6	12	
	Reduction		1	1	
	Avg. efficiency		1	1	
	Installation length	mm	118.5	118.5	
Weight	kg	0.55	0.55		
3 Redundant adapter 	Code	2AR			
	Order no.	0608810020		When configuring with a redundant measurement transducer, the adapter connects both measurement transducers.	
	Reduction		1		
	Avg. efficiency		1		
	Installation length	mm	50		
Weight	kg	0.3			
4 Adapter 	Code	2A			
	Order no.	0608810024		When configuring without a measurement transducer, the adapter connects the output drive and the planetary gearbox.	
	Reduction		1		
	Avg. efficiency		1		
	Installation length	mm	30		
Weight	kg	0.4			

5 Planetary gearbox 	Code	2GE19	2GE26	
	Order no.	0 608 720 043	0 608 720 038	
	Reduction	18.9	25.5	
	Avg. efficiency	0.93	0.9	
	Installation length	mm	50.9	50.9
	Weight	kg	0.4	0.4
6 Transverse gearbox 	Code	2ULG		
	Order no.	0 608 810 054	The transverse gearbox shortens the length of your tightening spindle by the installation length of the EC motor plus the installation length of the transverse gearbox. The use of a transverse gearbox decreases the tightening spindle working area.	
	Reduction	1		
	Avg. efficiency	0.95		
	Installation length	mm		28.3
	Weight	kg		0.4
7 EC motor 	Code	EC302		
	Order no.	0 608 701 016		
	Installation length	mm	197	
	Weight	kg	0.72	

Side-by-side arrangement of tightening spindles (center-to-center distance)						
Number of tightening spindles		2	3	4	5	6
						
Min. circle diameter- $\varnothing d_{\min}$ mm	2VNA82	35	40	55	64	74

Tightening spindles size 2 Offset output drive



- ▶ Working range 0.6 – 10 Nm
- ▶ Max. output drive speed 1000 rpm

Depending on the size, the actual components may differ from those in the illustration.

Features

- ▶ For tight hole templates, side-by-side arrangement with small center-to-center distances
- ▶ Standard tool mounts
- ▶ Easy assembly due to flange connection
- ▶ Maintenance-free for 1 million full-load cycles


Tightening spindle		Offset output drive				Measurement transducer	Planetary gearbox	EC motor
Working range *	Max. output drive speed	Range of spring	Tool mount	Code	Order no.	Code / Order no.	Code / Order no.	Code / Order no.
Nm	rpm	mm						
0.6–5	1000	20	1/4" square drive	2VNA82	0608800607	2DMC006 0608820110	2GE19 0608720043	EC302 0608701016
	1000	20	1/4" quick-change chuck	2VNB82	0608800608			
	780	20	1/4" square drive	2VNA82	0608800607		2GE26 0608720038	
	780	20	1/4" quick-change chuck	2VNB82	0608800608			
1.2–10	1000	20	1/4" square drive	2VNA82	0608800607	2DMC012 0608820111	2GE19 0608720043	EC302 0608701016
	1000	20	1/4" quick-change chuck	2VNB82	0608800608			
	780	20	1/4" square drive	2VNA82	0608800607		2GE26 0608720038	
	780	20	1/4" quick-change chuck	2VNB82	0608800608			





* The accuracy within the working range is $\pm 2\%$ over 6 s.



Note: You can find component dimensions and 3D/CAD data on the Internet at www.boschrexroth.com/tightening

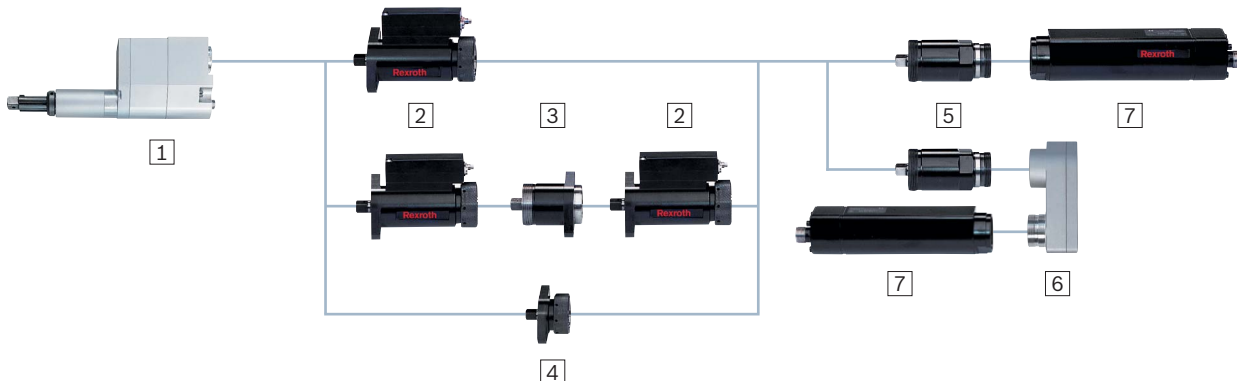




Offset output drive size 2

Components



1 Offset output drive	Code	2VNA82	2VNB82	
	Order no.	0608800607	0608800608	
	Max. torque	Nm 10	10	
	Range of spring	mm 20	20	
	Spring force	N 16–34	16–34	
	Reduction	1	1	
	Avg. efficiency	0.9	0.9	
	Length A	mm 82	82	
	Installation length	mm 153	153	
	Weight	kg 0.6	0.6	
2 Measurement transducer	Code	2DMC006	2DMC012	
	Order no.	0608820110	0608820111	You can configure your tightening spindle with a redundant measurement transducer from the same type. Connect both measurement transducers with the redundant adapter. For measurement transducer cables, see page 138.
	Nominal torque	Nm 6	12	
	Reduction	1	1	
	Avg. efficiency	1	1	
	Installation length	mm 118.5	118.5	
	Weight	kg 0.55	0.55	
3 Redundant adapter	Code	2AR		
	Order no.	0608810020		When configuring with a redundant measurement transducer, the adapter connects both measurement transducers.
	Reduction	1		
	Avg. efficiency	1		
	Installation length	mm 50		
	Weight	kg 0.3		
4 Adapter	Code	2A		
	Order no.	0608810024		When configuring without a measurement transducer, the adapter connects the output drive and the planetary gearbox.
	Reduction	1		
	Avg. efficiency	1		
	Installation length	mm 30		
	Weight	kg 0.4		

5 Planetary gearbox 	Code	2GE19	2GE26	
	Order no.	0 608 720 043	0 608 720 038	
	Reduction	18.9	25.5	
	Avg. efficiency	0.93	0.9	
	Installation length	mm	50.9	50.9
	Weight	kg	0.4	0.4
6 Transverse gearbox 	Code	2ULG		
	Order no.	0 608 810 054	The transverse gearbox shortens the length of your tightening spindle by the installation length of the EC motor plus the installation length of the transverse gearbox. The use of a transverse gearbox decreases the tightening spindle working area.	
	Reduction	1		
	Avg. efficiency	0.95		
	Installation length	mm		28.3
	Weight	kg		0.4
7 EC motor 	Code	EC302		
	Order no.	0 608 701 016		
	Installation length	mm	197	
	Weight	kg	0.72	

Side-by-side arrangement of tightening spindles (center-to-center distance)						
Number of tightening spindles		2	3	4	5	6
						
Min. circle diameter- \varnothing d_{min} mm	2VN...82	23	27	33	41	52

Tightening spindles size 2 Angle head



- ▶ Working range 0.6 – 11 Nm
- ▶ Max. output drive speed 1000 rpm

Depending on the size, the actual components may differ from those in the illustration.

Features


- ▶ For restricted accessibility
- ▶ Precision tothing for high torque accuracy
- ▶ Incremental positioning
- ▶ Integrated fastening flanges
- ▶ With integrated measurement transducer on request

Tightening spindle		Angle head			Measurement transducer	Planetary gearbox	EC motor
Working range *	Max. output drive speed	Tool mount	Code	Order no.	Code/ Order no.	Code/ Order no.	Code/ Order no.
0.6–5.5	1000	1/4" square drive	2W11	0608810041	2DMC006 0608820110	2GE19 0608720043	EC302 0608701016
	740	1/4" square drive	2W11	0608810041	2DMC006 0608820110	2GE26 0608720038	
1.2–11	1000	1/4" square drive	2W11	0608810041	2DMC012 0608820111	2GE19 0608720043	EC302 0608701016
	740	1/4" square drive	2W11	0608810041	2DMC012 0608820111	2GE26 0608720038	

* The accuracy within the working range is ± 2 % over 6 s.

Note: You can find component dimensions and 3D/CAD data on the Internet at www.boschrexroth.com/tightening

Angle head with spindle bearing

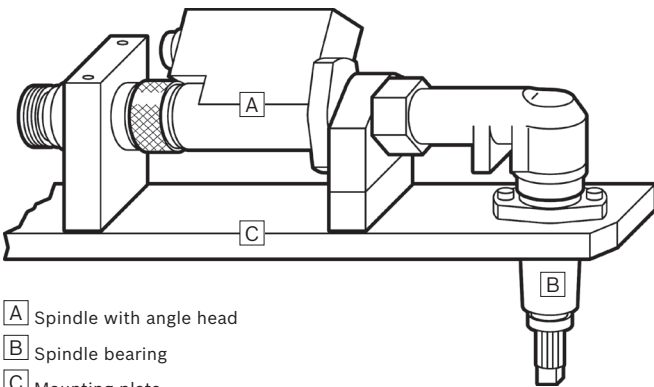

Axial compensator


To ensure troublefree operation, the angle head must always be operated with an output drive axial compensator, e.g. spindle bearing.





You can find more information in the planning instructions for angle heads in the Rexroth media directory at www.boschrexroth.com/mediadirectory



- A** Spindle with angle head
- B** Spindle bearing
- C** Mounting plate



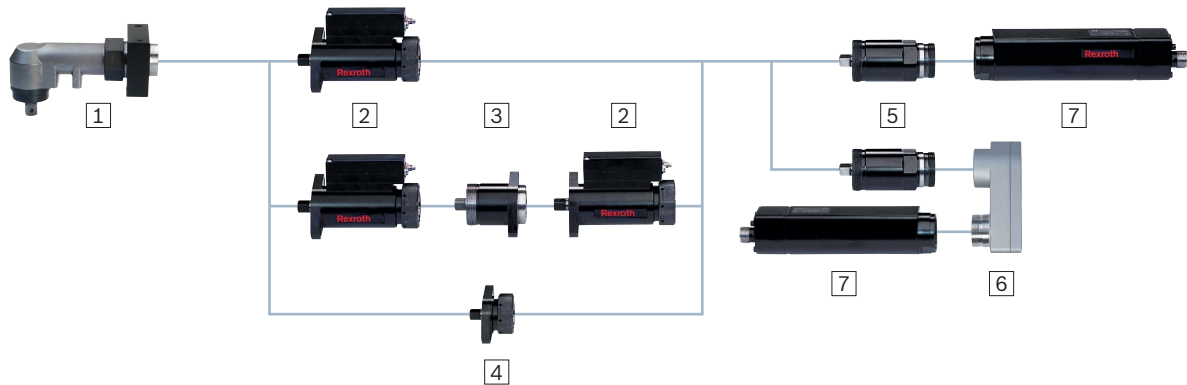


Angle head size 2

Components



1 Angle head 	Code	2W011			
	Order no.	0608810041			
	Max. torque	Nm	11		
	Reduction		1.05		
	Avg. efficiency		0.95		
	Installation length	mm	81.5		
	Weight	kg	0.7		
2 Measurement transducer 	Code	2DMC006	2DMC012		
	Order no.	0608820110	0608820111	You can configure your tightening spindle with a redundant measurement transducer from the same type. Connect both measurement transducers with the redundant adapter. For measurement transducer cables, see page 138.	
	Nominal torque	6	12		
	Reduction	1	1		
	Avg. efficiency	1	1		
	Installation length	mm	118.5		118.5
	Weight	kg	0.55		0.55
3 Redundant adapter 	Code	2AR			
	Order no.	0608810020		When configuring with a redundant measurement transducer, the adapter connects both measurement transducers	
	Reduction	1			
	Avg. efficiency	1			
	Installation length	mm	50		
	Weight	kg	0.3		
4 Adapter 	Code	2A			
	Order no.	0608810024		When configuring without a measurement transducer, the adapter connects the output drive and the planetary gearbox	
	Reduction	1			
	Avg. efficiency	1			
	Installation length	mm	30		
	Weight	kg	0.4		

5 Planetary gearbox 	Code	2GE19	2GE26	
	Order no.	0 608 720 043	0 608 720 038	
	Reduction	18.9	25.5	
	Avg. efficiency	0.93	0.9	
	Installation length	mm	50.9	50.9
	Weight	kg	0.4	0.4
6 Transverse gearbox 	Code	2ULG		
	Order no.	0 608 810 054	The transverse gearbox shortens the length of your tightening spindle by the installation length of the EC motor plus the installation length of the transverse gearbox. The use of a transverse gearbox decreases the tightening spindle working area.	
	Reduction	1		
	Avg. efficiency	0.95		
	Installation length	mm		28.3
	Weight	kg		0.4
7 EC motor 	Code	EC302		
	Order no.	0 608 701 016		
	Installation length	mm	197	
	Weight	kg	0.72	

Side-by-side arrangement of tightening spindles (center-to-center distance)					
Number of tightening spindles	2	3	4	5	6
					
Min. circle diameter- \varnothing d_{min} mm	2W011 26	30	36	44	52

Tightening spindles size 2 Feed output drive



- ▶ Working range 0.6 – 10 Nm
- ▶ Max. output drive speed 1000 rpm

Depending on the size, the actual components may differ from those in the illustration.

Features

- ▶ Integrated feed movement
- ▶ In connection with automatic bolt supply
- ▶ Standard tool mounts and compressed air connections
- ▶ Easy assembly due to flange connection
- ▶ Maintenance-free for 1 million full-load cycles


Tightening spindle		Feed output drive				Measurement transducer	Planetary gearbox	EC motor
Working range *	Max. output drive speed	Stroke	Tool mount	Code	Order no.	Code/ Order no.	Code/ Order no.	Code/ Order no.
Nm	rpm	mm						
0.6–5.5	1000	160	1/4" square drive	2S1M8	0608800646	2DMC006	2GE19	EC302
			M6 outer thread	2S2M8	0608800647	0608820110	0608720043	0608701016
	780	160	1/4" square drive	2S1M8	0608800646	2DMC006	2GE26	
			M6 outer thread	2S2M8	0608800647	0608820110	0608720038	
1.2–7	1000	160	M6 outer thread	2S2M8	0608800647	2DMC012 0608820111	2GE19 0608720043	EC302 0608701016
	780	160	M6 outer thread	2S2M8	0608800647	2DMC012 0608820111	2GE26 0608720038	
1.2–10	1000	160	1/4" square drive	2S1M8	0608800646	2DMC012 0608820111	2GE19 0608720043	EC302 0608701016
	780	160	1/4" square drive	2S1M8	0608800646	2DMC012 0608820111	2GE26 0608720038	





* The accuracy within the working range is $\pm 2\%$ over 6 s.




Note: You can find component dimensions and 3D/CAD data on the Internet at www.boschrexroth.com/tightening



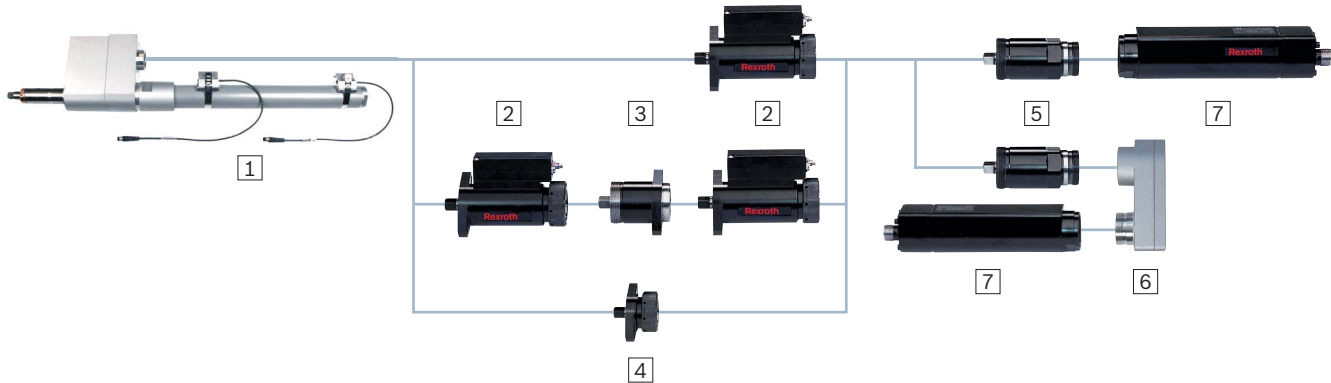


Feed output drive size 2

Components



1 Feed output drive	Code	2S1M8	2S2M8	
	Order no.	0 608 800 646	0 608 800 647	
	Max. torque	Nm 10	7	
	Stroke	mm 160	160	
	Max. air pressure	bar 4	4	
	Reduction	1	1	
	Avg. efficiency	0.93	0.93	
	Length A	mm 80	80	
	Installation length	mm 189.5	189.5	
	Weight	kg 2	2	
2 Measurement transducer	Code	2DMC006	2DMC012	
	Order no.	0 608 820 110	0 608 820 111	You can configure your tightening spindle with a redundant measurement transducer from the same type. Connect both measurement transducers with the redundant adapter. For measurement transducer cables, see page 138.
	Nominal torque	Nm 6	12	
	Reduction	1	1	
	Avg. efficiency	1	1	
	Installation length	mm 118.5	118.5	
	Weight	kg 0.55	0.55	
3 Redundant adapter	Code	2AR		
	Order no.	0 608 810 020		When configuring with a redundant measurement transducer, the adapter connects both measurement transducers.
	Reduction	1		
	Avg. efficiency	1		
	Installation length	mm 50		
	Weight	kg 0.3		
4 Adapter	Code	2A		
	Order no.	0 608 810 024		When configuring without a measurement transducer, the adapter connects the output drive and the planetary gearbox.
	Reduction	1		
	Avg. efficiency	1		
	Installation length	mm 30		
	Weight	kg 0.4		

5 Planetary gearbox 	Code	2GE19	2GE26	
	Order no.	0 608 720 043	0 608 720 038	
	Reduction	18.9	25.5	
	Avg. efficiency	0.93	0.9	
	Installation length	mm	50.9	50.9
	Weight	kg	0.4	0.4
6 Transverse gearbox 	Code	2ULG		
	Order no.	0 608 810 054	The transverse gearbox shortens the length of your tightening spindle by the installation length of the EC motor plus the installation length of the transverse gearbox. The use of a transverse gearbox decreases the tightening spindle working area.	
	Reduction	1		
	Avg. efficiency	0.95		
	Installation length	mm		28.3
	Weight	kg		0.4
7 EC motor 	Code	EC302		
	Order no.	0 608 701 016		
	Installation length	mm	197	
	Weight	kg	0.72	

Side-by-side arrangement of tightening spindles (center-to-center distance)						
Number of tightening spindles		2	3	4	5	6
						
Min. circle diameter- \varnothing d_{min} mm	2S...	33	38	46	55	65

Tightening spindles size 3 Spindle bearing



- ▶ Working range 1.7 – 55 Nm
- ▶ Max. output drive speed 740 rpm

Depending on the size, the actual components may differ from those in the illustration.

Features


- ▶ Various lengths with axial compensator
- ▶ Standard tool mounts
- ▶ Maximum efficiency
- ▶ Easy assembly due to flange connection
- ▶ Maintenance-free for 1 million full-load cycles

Tightening spindle		Spindle bearing				Measurement transducer	Planetary gearbox	EC motor	
Working range*	Max. output drive speed	Range of spring mm/ Max. Spring force N	Tool mount	Code	Order no.	Code/ Order no.	Code/ Order no.	Code/ Order no.	
Nm	rpm								
1.7–16	740	25/ 39	3/8" square drive	G1A102	0608800062	3DMC017 0608820112	3GE27 0608720053	EC303 0608701017	
			1/4" quick-change chuck	G1B102	0608800063				
			3/8" square drive with centering pin	G1C102	0608800072				
		50/ 38	3/8" square drive	G2A152	0608800064				
			1/4" quick-change chuck	G2B152	0608800065				
			3/8" square drive with centering pin	G2C152	0608800073				
	295	25/ 39	3/8" square drive	G1A102	0608800062	3DMC017 0608820112	3GE67 0608720039		
			1/4" quick-change chuck	G1B102	0608800063				
			3/8" square drive with centering pin	G1C102	0608800072				
50/ 38		3/8" square drive	G2A152	0608800064					
		1/4" quick-change chuck	G2B152	0608800065					
		3/8" square drive with centering pin	G2C152	0608800073					
6–32	740	25/ 39	3/8" square drive	G1A102	0608800062	3DMC060 0608820113	3GE27 0608720053	EC303 0608701017	
			1/4" quick-change chuck	G1B102	0608800063				
			3/8" square drive with centering pin	G1C102	0608800072				
		50/ 38	3/8" square drive	G2A152	0608800064				
			1/4" quick-change chuck	G2B152	0608800065				
			3/8" square drive with centering pin	G2C152	0608800073				
	6–35	295	25/ 39	1/4" quick-change chuck	G1B102	0608800063	3DMC060 0608820113	3GE67 0608720039	EC303 0608701017
				50/ 38	1/4" quick-change chuck	G2B152			
	6–55	295	25/ 39	3/8" square drive	G1A102	0608800062	3DMC060 0608820113	3GE67 0608720039	EC303 0608701017
3/8" square drive with centering pin				G1C102	0608800072				
50/ 38			3/8" square drive	G2A152	0608800064				
			3/8" square drive with centering pin	G2C152	0608800073				




* The accuracy within the working range is $\pm 2\%$ over 6 s.



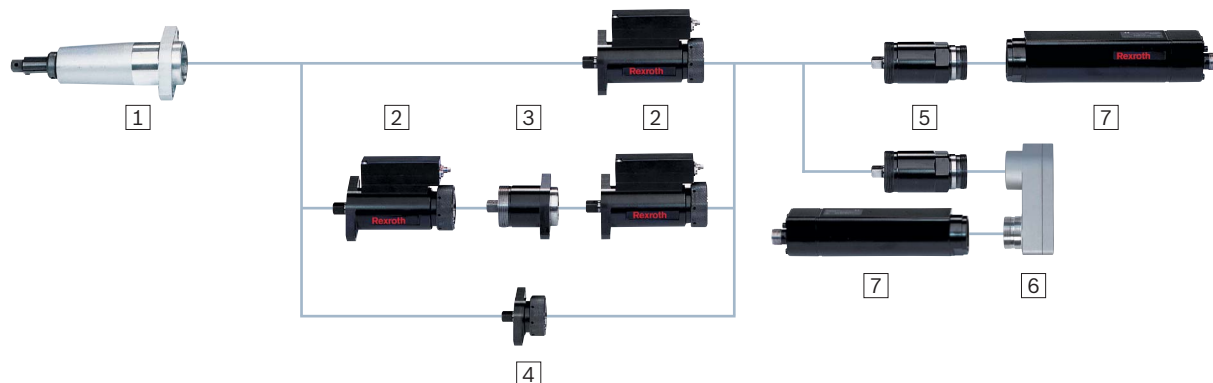


Note: You can find component dimensions and 3D/CAD data on the Internet at www.boschrexroth.com/tightening

Spindle bearing size 3
Components



1 Spindle bearing	Code	G1B102	G2B152	G1A102	G1C102	G2A152	G2C152
	Order no.	0 608 800 063	0 608 800 065	0 608 800 062	0 608 800 072	0 608 800 064	0 608 800 073
	Max. torque Nm	35	35	55	55	55	55
	Range of spring mm	25	50	25	25	50	50
	Spring force N	16–39	14–38	16–39	16–39	14–38	14–38
	Reduction	1	1	1	1	1	1
	Avg. efficiency	1	1	1	1	1	1
	Length A mm	102	152	102	102	152	152
	Installation length mm	112	162	112	112	162	162
	Weight kg	0.33	0.41	0.33	0.33	0.41	0.41
2 Measurement transducer	Code	3DMC017	3DMC060	You can configure your tightening spindle with a redundant measurement transducer from the same type. Connect both measurement transducers with the redundant adapter. For measurement transducer cables, see page 138.			
	Order no.	0 608 820 112	0 608 820 113				
	Nominal torque Nm	17	60				
	Reduction	1	1				
	Avg. efficiency	1	1				
	Installation length mm	118.6	118.6				
	Weight kg	1	1				
3 Redundant adapter	Code	3AR	When configuring with a redundant measurement transducer, the adapter connects both measurement transducers.				
	Order no.	0 608 810 021					
	Reduction	1					
	Avg. efficiency	1					
	Installation length mm	57					
	Weight kg	0.4					
4 Adapter	Code	3A	When configuring without a measurement transducer, the adapter connects the output drive and the planetary gearbox.				
	Order no.	0 608 810 025					
	Reduction	1					
	Avg. efficiency	1					
	Installation length mm	30.5					
	Weight kg	0.3					

5 Planetary gearbox 	Code	3GE27	3GE67	
	Order no.	0 608 720 053	0 608 720 039	
	Reduction	27	67.4	
	Avg. efficiency	0.93	0.9	
	Installation length	mm	65.5	81.5
	Weight	kg	0.5	0.5
6 Transverse gearbox 	Code	3ULG		
	Order no.	0 608 810 037	The transverse gearbox shortens the length of your tightening spindle by the installation length of the EC motor plus the installation length of the transverse gearbox. The use of a transverse gearbox decreases the tightening spindle working area.	
	Reduction	1		
	Avg. efficiency	0.95		
	Installation length	mm		30.1
	Weight	kg		0.4
7 EC motor 	Code	EC303		
	Order no.	0 608 701 017		
	Installation length	mm	219	
	Weight	kg	1.3	

Side-by-side arrangement of tightening spindles (center-to-center distance)						
Number of tightening spindles		2	3	4	5	6
						
Min. circle diameter-Ø d _{min} mm	G...	45	52	65	80	89

Tightening spindles size 3 Offset output drive



- ▶ Working range 1.7 – 51 Nm
- ▶ Max. output drive speed 740 rpm

Depending on the size, the actual components may differ from those in the illustration.

Features

- ▶ For tight hole templates
- ▶ Standard tool mounts
- ▶ Easy assembly due to flange connection
- ▶ Maintenance-free for 1 million full-load cycles


Tightening spindle		Offset output drive				Measurement transducer	Planetary gearbox	EC motor
Working range*	Max. output drive speed	Range of spring	Tool mount	Code	Order no.	Code/Order no.	Code/Order no.	Code/Order no.
Nm	rpm	mm						
1.7–14.5	740	50	3/8" square drive	VNS2A152	0608800629	3DMC017 0608820112	3GE27 0608720053	EC303 0608701017
			1/4" quick-change chuck	VNS2B152	0608800630			
			3/8" square drive with centering pin	VNS2C152	0608800631			
	295	50	3/8" square drive	VNS2A152	0608800629	3DMC017 0608820112	3GE67 0608720039	
			1/4" quick-change chuck	VNS2B152	0608800630			
			3/8" square drive with centering pin	VNS2C152	0608800631			
6–29	740	50	3/8" square drive	VNS2A152	0608800629	3DMC060 0608820113	3GE27 0608720053	EC303 0608701017
			1/4" quick-change chuck	VNS2B152	0608800630			
			3/8" square drive with centering pin	VNS2C152	0608800631			
6–35	295	50	1/4" quick-change chuck	VNS2B152	0608800630	3DMC060 0608820113	3GE67 0608720039	EC303 0608701017
6–51	295	50	3/8" square drive	VNS2A152	0608800629	3DMC060 0608820113	3GE67 0608720039	EC303 0608701017
		50	3/8" square drive with centering pin	VNS2C152	0608800631			





* The accuracy within the working range is $\pm 2\%$ over 6 s.




Note: You can find component dimensions and 3D/CAD data on the Internet at www.boschrexroth.com/tightening

Offset output drive size 3

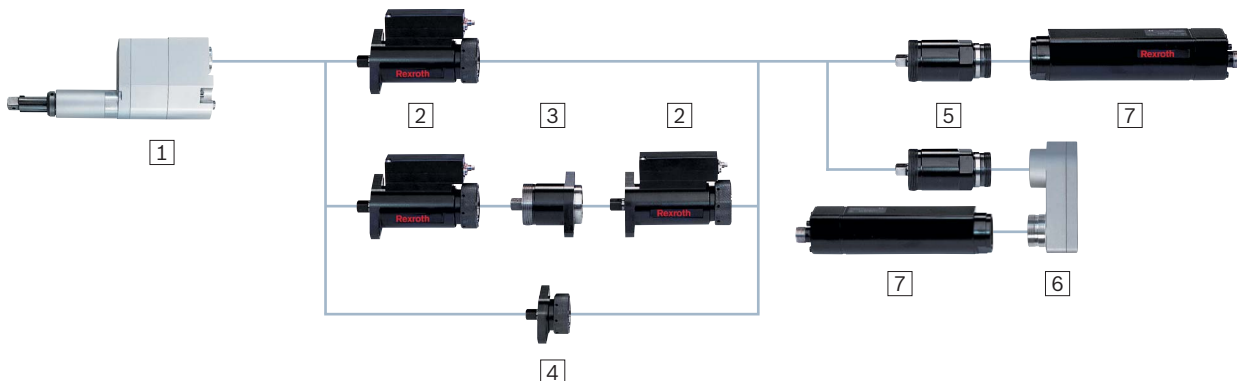




Components



1 Offset output drive	Code	VNS2B152	VNS2A152	VNS2C152
	Order no.	0608800630	0608800629	0608800631
	Max. torque	Nm 35	55	55
	Range of spring	mm 50	50	50
	Spring force	N 14–38	14–38	14–38
	Reduction	1	1	1
	Avg. efficiency	0.93	0.93	0.93
	Length A	mm 152	152	152
	Installation length	mm 240	240	240
	Weight	kg 1.2	1.2	1.2
2 Measurement transducer	Code	3DMC017	3DMC060	
	Order no.	0608820112	0608820113	You can configure your tightening spindle with a redundant measurement transducer from the same type. Connect both measurement transducers with the redundant adapter. For measurement transducer cables, see page 138.
	Nominal torque	Nm 17	60	
	Reduction	1	1	
	Avg. efficiency	1	1	
	Installation length	mm 118.6	118.6	
	Weight	kg 1	1	
3 Redundant adapter	Code	3AR		
	Order no.	0608810021		When configuring with a redundant measurement transducer, the adapter connects both measurement transducers.
	Reduction	1		
	Avg. efficiency	1		
	Installation length	mm 57		
	Weight	kg 0.4		
4 Adapter	Code	3A		
	Order no.	0608810025		When configuring without a measurement transducer, the adapter connects the output drive and the planetary gearbox.
	Reduction	1		
	Avg. efficiency	1		
	Installation length	mm 30.5		
	Weight	kg 0.3		

5 Planetary gearbox 	Code	3GE27	3GE67	
	Order no.	0 608 720 053	0 608 720 039	
	Reduction	27	67.4	
	Avg. efficiency	0.93	0.9	
	Installation length	mm	65.5	81.5
	Weight	kg	0.5	0.5
6 Transverse gearbox 	Code	3ULG		
	Order no.	0 608 810 037	The transverse gearbox shortens the length of your tightening spindle by the installation length of the EC motor plus the installation length of the transverse gearbox. The use of a transverse gearbox decreases the tightening spindle working area.	
	Reduction	1		
	Avg. efficiency	0.95		
	Installation length	mm		30.1
	Weight	kg		0.4
7 EC motor 	Code	EC303		
	Order no.	0 608 701 017		
	Installation length	mm	219	
	Weight	kg	1.3	

Side-by-side arrangement of tightening spindles (center-to-center distance)

Number of tightening spindles	2	3	4	5	6
					
Min. circle diameter- \varnothing d_{min} mm	VNS2...152 29	33.5	41	49.5	58

Tightening spindles size 3 Offset output drive with integrated measurement transducer



- ▶ Working range 3.2 – 53 Nm
- ▶ Max. output drive speed 740 rpm

Depending on the size, the actual components may differ from those in the illustration.

Features


- ▶ Reduced center-to-center distances
- ▶ Torque measurement directly at the bolt
- ▶ Proximity switching digital measurement transfer
- ▶ Efficiency fluctuations do not affect measurements

Tightening spindle		Offset output drive with integrated measurement transducer				Planetary gearbox	EC motor
Working range*	Max. output drive speed	Range of spring	Tool mount	Code	Order no.	Code/ Order no.	Code/ Order no.
Nm	rpm	mm					
3.2–16	740	50	3/8" square drive	3VMC017	0608801009	3GE27 0608720053	EC303 0608701017
	295	50	3/8" square drive	3VMC017	0608801009	3GE67 0608720039	EC303 0608701017
6–29	740	50	3/8" square drive	3VMC035	0608801010	3GE27 0608720053	EC303 0608701017
6–33	295	50	3/8" square drive	3VMC035	0608801010	3GE67 0608720039	EC303 0608701017
10–53	295	50	3/8" square drive	3VMC060	0608801011	3GE67 0608720039	EC303 0608701017




* The accuracy within the working range is $\pm 2\%$ over 6 s.



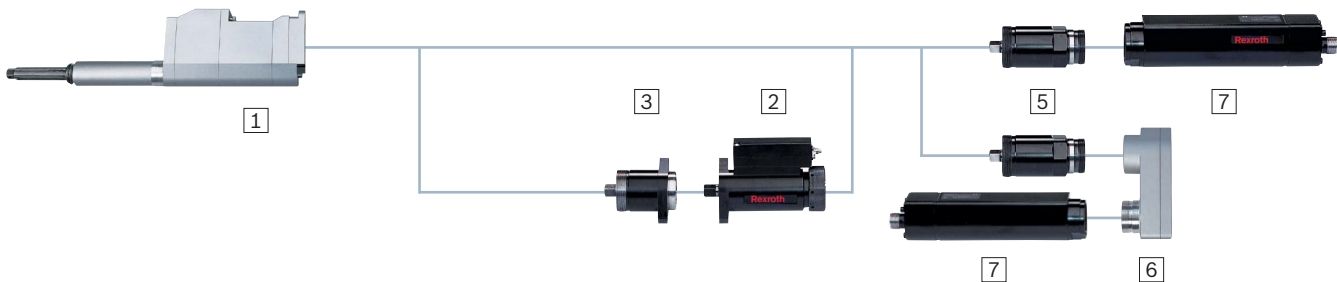


Note: You can find component dimensions and 3D/CAD data on the Internet at www.boschrexroth.com/tightening

Offset output drive with integrated measurement transducer size 3
Components



1 Offset output drive with integrated measurement transducer	Code	3VMC017	3VMC035	3VMC060
	Order no.	0608801009	0608801010	0608801011
	Max. torque	Nm 17	35	60
	Range of spring	mm 50	50	50
	Spring force	N 14–38	14–38	14–38
	Reduction	1	1	1
	Avg. efficiency	0.93	0.93	0.93
	Length A	mm 152	152	152
	Installation length	mm 311	311	311
	Weight	kg 3.4	3.4	3.4
	Nominal torque	Nm 17	35	60
	Measurement transducer			
2 Measurement transducer	Code	3DMC017	3DMC060	
	Order no.	0608820112	0608820113	You can configure your tightening spindle with a redundant measurement transducer from the same type. Connect both measurement transducers with the redundant adapter. For measurement transducer cables, see page 138.
	Nominal torque	Nm 17	60	
	Reduction	1	1	
	Avg. efficiency	1	1	
	Installation length	mm 118.6	118.6	
	Weight	kg 1	1	
3 Redundant adapter	Code	3AR		
	Order no.	0608810021		When configuring with a redundant measurement transducer, the adapter connects both measurement transducers.
	Reduction	1		
	Avg. efficiency	1		
	Installation length	mm 57		
	Weight	kg 0.4		

5 Planetary gearbox	Code	3GE27	3GE67
	Order no.	0 608 720 053	0 608 720 039
	Reduction	27	67.4
	Avg. efficiency	0.93	0.9
	Installation length	mm 65.5	81.5
	Weight	kg 0.5	0.5
6 Transverse gearbox	Code	3ULG	
	Order no.	0 608 810 037	The transverse gearbox shortens the length of your tightening spindle by the installation length of the EC motor plus the installation length of the transverse gearbox. The use of a transverse gearbox decreases the tightening spindle working area.
	Reduction	1	
	Avg. efficiency	0.95	
	Installation length	mm 30.1	
	Weight	kg 0.4	
7 EC motor	Code	EC303	
	Order no.	0 608 701 017	
	Installation length	mm 219	
	Weight	kg 1.3	

Side-by-side arrangement of tightening spindles (center-to-center distance)						
Number of tightening spindles		2	3	4	5	6
						
Min. circle diameter- \varnothing d _{min} mm	3VMC...	31	36	44	53	62

Tightening spindles size 3 Angle head



- ▶ Working range 1.7–90 Nm
- ▶ Max. output drive speed 705 rpm

Depending on the size, the actual components may differ from those in the illustration.

Features

- ▶ For restricted accessibility
- ▶ Precision tothing for high torque accuracy
- ▶ Incremental positioning
- ▶ Integrated fastening flanges
- ▶ With integrated measurement transducer on request

Tightening spindle		Angle head			Measure- ment transducer	Planetary gearbox	EC motor
Working range* Nm	Max. output drive speed rpm	Tool mount	Code	Order no.	Code/ Order no.	Code/ Order no.	Code/ Order no.
1.7–16	705	3/8" square drive	3W027	0608810042	3DMC017 0608820112	3GE27 0608720053	EC303 0608701017
	280	3/8" square drive	3W027	0608810042	3DMC017 0608820112	3GE67 0608720039	
	705	3/8" square drive	3W050	0608810043	3DMC017 0608820112	3GE27 0608720053	
	280	3/8" square drive	3W050	0608810043	3DMC017 0608820112	3GE67 0608720039	
2.6–25	705	1/2" square drive	3W090	0608810044	3DMC017 0608820112	3GE27 0608720053	EC303 0608701017
	280	1/2" square drive	3W090	0608810044	3DMC017 0608820112	3GE67 0608720039	
6–27	705	3/8" square drive	3W027	0608810042	3DMC060 0608820113	3GE27 0608720053	EC303 0608701017
	280	3/8" square drive	3W027	0608810042	3DMC060 0608820113	3GE67 0608720039	
6–32	705	3/8" square drive	3W050	0608810043	3DMC060 0608820113	3GE27 0608720053	EC303 0608701017
6–50	280	3/8" square drive	3W050	0608810043	3DMC060 0608820113	3GE67 0608720039	EC303 0608701017
9–53	440	1/2" square drive	3W090	0608810044	3DMC060 0608820113	3GE27 0608720053	EC303 0608701017
9–90	175	1/2" square drive	3W090	0608810044	3DMC060 0608820113	3GE67 0608720039	EC303 0608701017

* The accuracy within the working range is $\pm 2\%$ over 6 s.

To ensure troublefree operation, the angle head must always be operated with an output drive axial compensator, e.g. spindle bearing.

See page 21

For an output drive axial compensator, the following angle head/spindle bearing combinations are possible:


3W027 (0608810042) – spindle bearing size 3 (page 30)





3W050 (0608810043) – spindle bearing size 3 (page 30)




3W090 (0608810044) – spindle bearing size 4 (page 50)



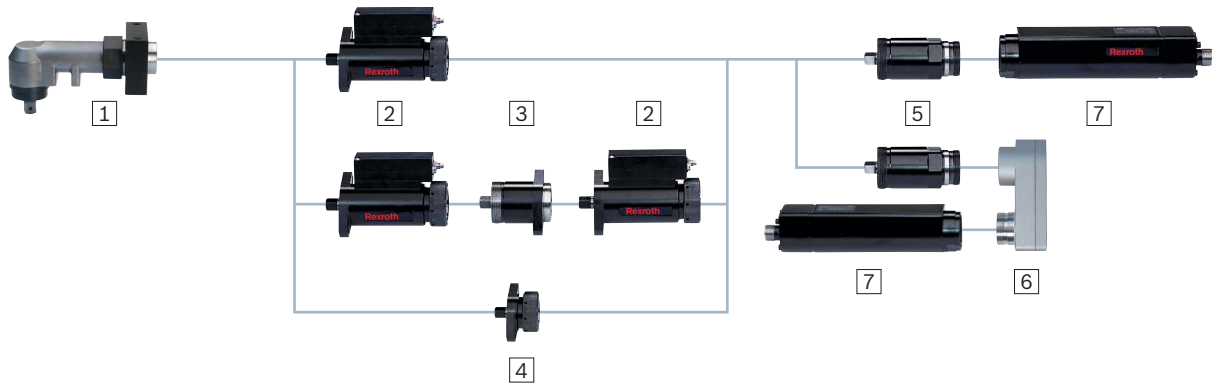


Note: You can find component dimensions and 3D/CAD data on the Internet at www.boschrexroth.com/tightening

**Angle head size 3
Components**



1 Angle head 	Code	3W027	3W050	3W090	
	Order no.	0608810042	0608810043	0608810044	
	Max. torque	Nm	27	50	90
	Reduction		1.05	1.05	1.67
	Avg. efficiency		0.95	0.95	0.95
	Installation length	mm	85.6	125.6	125.6
	Weight	kg	1	1.42	1.7
2 Measurement transducer 	Code	3DMC017	3DMC060		
	Order no.	0608820112	0608820113	You can configure your tightening spindle with a redundant measurement transducer from the same type. Connect both measurement transducers with the redundant adapter. For measurement transducer cables, see page 138.	
	Nominal torque	Nm	17	60	
	Reduction		1	1	
	Avg. efficiency		1	1	
	Installation length	mm	118.6	118.6	
Weight	kg	1	1		
3 Redundant adapter 	Code	3AR			
	Order no.	0608810021		When configuring with a redundant measurement transducer, the adapter connects both measurement transducers.	
	Reduction		1		
	Avg. efficiency		1		
	Installation length	mm	57		
Weight	kg	0.4			
4 Adapter 	Code	3A			
	Order no.	0608810025		When configuring without a measurement transducer, the adapter connects the output drive and the planetary gearbox.	
	Reduction		1		
	Avg. efficiency		1		
	Installation length	mm	30.5		
Weight	kg	0.3			

	5 Planetary gearbox	Code	3GE27	3GE67		
		Order no.	0 608 720 053	0 608 720 039		
		Reduction	27	67.4		
		Avg. efficiency	0.93	0.9		
		Installation length	mm	65.5	81.5	
		Weight	kg	0.5	0.5	
	6 Transverse gearbox	Code	3ULG			
		Order no.	0 608 810 037		The transverse gearbox shortens the length of your tightening spindle by the installation length of the EC motor plus the installation length of the transverse gearbox. The use of a transverse gearbox decreases the tightening spindle working area.	
		Reduction	1			
		Avg. efficiency	0.95			
		Installation length	mm	30.1		
		Weight	kg	0.4		
	7 EC motor	Code	EC303			
		Order no.	0 608 701 017			
		Installation length	mm	219		
		Weight	kg	1.3		

Side-by-side arrangement of tightening spindles (center-to-center distance)						
Number of tightening spindles		2	3	4	5	6
						
Min. circle diameter- \varnothing d _{min} mm	3W027	29	34	41	50	58
	3W050	35	40	50	60	70
	3W090	45	52	64	78	90

Tightening spindles size 3 Feed output drive



- ▶ Working range 1.7 – 53 Nm
- ▶ Max. output drive speed 740 rpm

Depending on the size, the actual components may differ from those in the illustration.

Features


- ▶ Integrated feed movement
- ▶ In connection with automatic bolt supply
- ▶ Standard tool mounts and compressed air connections
- ▶ Easy assembly due to flange connection
- ▶ Maintenance-free for 1 million full-load cycles





Tightening spindle		Feed output drive				Measure- ment transducer	Planetary gearbox	EC motor
Working range* Nm	Max. output drive speed rpm	Stroke mm	Tool mount	Code	Order no.	Code/ Order no.	Code/ Order no.	Code/ Order no.
1.7–15	740	200	3/8" square drive	3S1M8	0 608 800 648	3DMC017 0 608 820 112	3GE27 0 608 720 053	EC303 0 608 701 017
	295	200	3/8" square drive	3S1M8	0 608 800 648	3DMC017 0 608 820 112	3GE67 0 608 720 039	
	740	200	1/4" square drive	3S2M8	0 608 800 649	3DMC017 0 608 820 112	3GE27 0 608 720 053	
	295	200	1/4" square drive	3S2M8	0 608 800 649	3DMC017 0 608 820 112	3GE67 0 608 720 039	
6–20	295	200	1/4" square drive	3S2M8	0 608 800 649	3DMC060 0 608 820 113	3GE67 0 608 720 039	EC303 0 608 701 017
6–20	740	200	1/4" square drive	3S2M8	0 608 800 649	3DMC060 0 608 820 113	3GE27 0 608 720 053	EC303 0 608 701 017
6–30	740	200	3/8" square drive	3S1M8	0 608 800 648	3DMC060 0 608 820 113	3GE27 0 608 720 053	EC303 0 608 701 017
6–53	295	200	3/8" square drive	3S1M8	0 608 800 648	3DMC060 0 608 820 113	3GE67 0 608 720 039	EC303 0 608 701 017




* The accuracy within the working range is $\pm 2\%$ over 6 s.



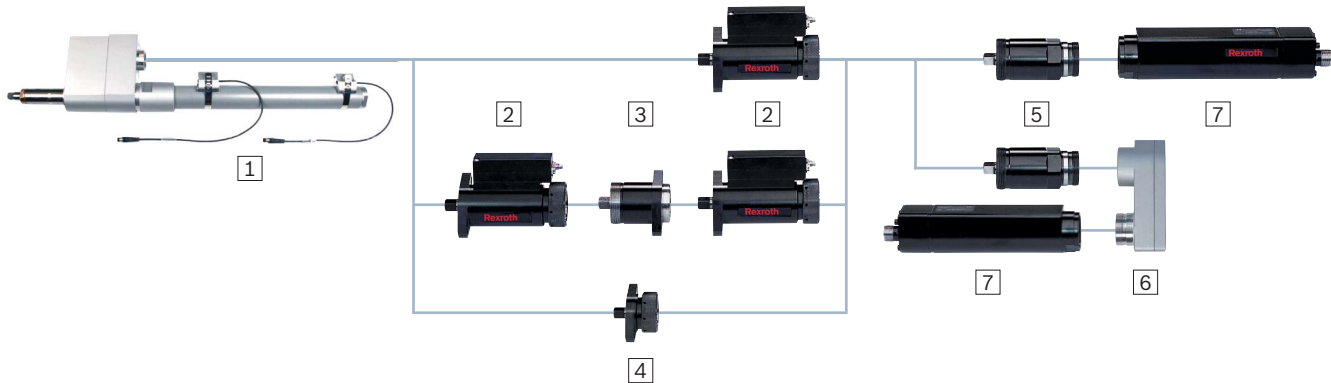


Note: You can find component dimensions and 3D/CAD data on the Internet at www.boschrexroth.com/tightening

Feed output drive size 3
Components



1 Feed output drive	Code	3S2M8	3S1M8	
	Order no.	0608800649	0608800648	
	Max. torque	Nm 20	55	
	Stroke	mm 200	200	
	Max. air pressure	bar 4	4	
	Reduction	1	1	
	Avg. efficiency	0.93	0.93	
	Length A	mm 97	97	
	Installation length	mm 204	204	
	Weight	kg 3.5	3.5	
2 Measurement transducer	Code	3DMC017	3DMC060	
	Order no.	0608820112	0608820113	You can configure your tightening spindle with a redundant measurement transducer from the same type. Connect both measurement transducers with the redundant adapter. For measurement transducer cables, see page 138.
	Nominal torque	Nm 17	60	
	Reduction	1	1	
	Avg. efficiency	1	1	
	Installation length	mm 118.6	118.6	
	Weight	kg 1	1	
3 Redundant adapter	Code	3AR		
	Order no.	0608810021		When configuring with a redundant measurement transducer, the adapter connects both measurement transducers.
	Reduction	1		
	Avg. efficiency	1		
	Installation length	mm 57		
	Weight	kg 0.4		
4 Adapter	Code	3A		
	Order no.	0608810025		When configuring without a measurement transducer, the adapter connects the output drive and the planetary gearbox.
	Reduction	1		
	Avg. efficiency	1		
	Installation length	mm 30.5		
	Weight	kg 0.3		

5 Planetary gearbox 	Code	3GE27	3GE67		
	Order no.	0 608 720 053	0 608 720 039		
	Reduction	27	67.4		
	Avg. efficiency	0.93	0.9		
	Installation length	mm	65.5	81.5	
	Weight	kg	0.5	0.5	
6 Transverse gearbox 	Code	3ULG			
	Order no.	0 608 810 037		The transverse gearbox shortens the length of your tightening spindle by the installation length of the EC motor plus the installation length of the transverse gearbox. The use of a transverse gearbox decreases the tightening spindle working area.	
	Reduction	1			
	Avg. efficiency	0.95			
	Installation length	mm	30.1		
	Weight	kg	0.4		
7 EC motor 	Code	EC303			
	Order no.	0 608 701 017			
	Installation length	mm	219		
	Weight	kg	1.3		

Side-by-side arrangement of tightening spindles (center-to-center distance)						
Number of tightening spindles	2	3	4	5	6	
						
Min. circle diameter-Ø d _{min} mm	3S...	49	56.5	69.5	83.5	98

Tightening spindles size 4 Spindle bearing



- ▶ Working range 6–150 Nm
- ▶ Max. output drive speed 1000 rpm

Depending on the size, the actual components may differ from those in the illustration.

Features

- ▶ Various lengths with axial compensator
- ▶ Standard tool mounts
- ▶ Maximum efficiency
- ▶ Easy assembly due to flange connection
- ▶ Maintenance-free for 1 million full-load cycles


Tightening spindle		Spindle bearing				Measurement transducer	Planetary gearbox	EC motor					
Working range*	Max. output drive speed	Range of spring mm/ Max. Spring force N	Tool mount	Code	Order no.	Code/ Order no.	Code/ Order no.	Code/ Order no.					
Nm	rpm												
6–52	1000	25 / 90.2	1/2" square drive	GK1A156	0 608 800 031	4DMC060 0 608 820 114	4GE19 0 608 720 056	EC304 0 608 701 018					
			7/16" quick-change chuck	GK1B156	0 608 800 020								
			1/2" square drive with centering pin	GK1C156	0 608 800 001								
		50 / 93.3	1/2" square drive	GK2A181/251	0 608 800 006 / 048								
			7/16" quick-change chuck	GK2B181/251	0 608 800 008 / 049								
			1/2" square drive with centering pin	GK2C181/251	0 608 800 021 / 050								
			1/2" square drive	GL2A319	0 608 800 056								
			7/16" quick-change chuck	GL2B319	0 608 800 057								
			1/2" square drive with centering pin	GL2C319	0 608 800 027								
		6–56	340	25 / 93.3	1/2" square drive				GK1A156	0 608 800 031	4DMC060 0 608 820 114	4GE59 0 608 720 040	EC304 0 608 701 018
					7/16" quick-change chuck				GK1B156	0 608 800 020			
					1/2" square drive with centering pin				GK1C156	0 608 800 001			
50 / 93.3	1/2" square drive			GK2A181/251	0 608 800 006 / 048								
	7/16" quick-change chuck			GK2B181/251	0 608 800 008 / 049								
	1/2" square drive with centering pin			GK2C181/251	0 608 800 021 / 050								
	1/2" square drive			GL2A319	0 608 800 056								
	7/16" quick-change chuck			GL2B319	0 608 800 057								
	1/2" square drive with centering pin			GL2C319	0 608 800 027								
15–150	340			25 / 93.3	1/2" square drive	GK1A156	0 608 800 031	4DMC160 0 608 820 115	4GE59 0 608 720 040	EC304 0 608 701 018			
					7/16" quick-change chuck	GK1B156	0 608 800 020						
					1/2" square drive with centering pin	GK1C156	0 608 800 001						
		50 / 93.3	1/2" square drive	GK2A181/251	0 608 800 006 / 048								
			7/16" quick-change chuck	GK2B181/251	0 608 800 008 / 049								
			1/2" square drive with centering pin	GK2C181/251	0 608 800 021 / 050								
			1/2" square drive	GL2A319	0 608 800 056								
			7/16" quick-change chuck	GL2B319	0 608 800 057								
			1/2" square drive with centering pin	GL2C319	0 608 800 027								

* The accuracy within the working range is $\pm 2\%$ over 6 s.





Note: You can find component dimensions and 3D/CAD data on the Internet at www.boschrexroth.com/tightening

Spindle bearing size 4

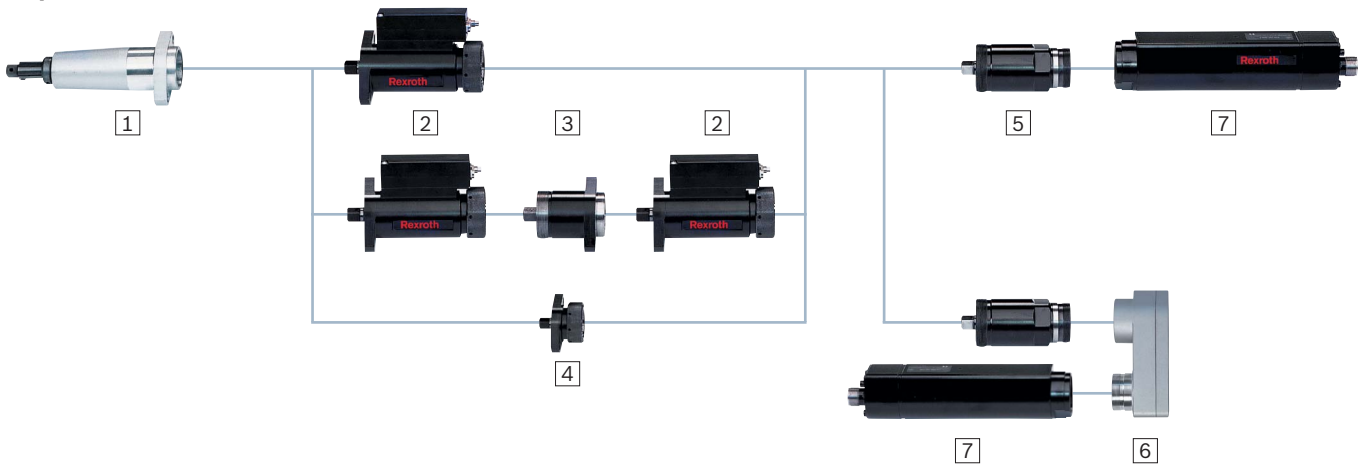




Components



1 Spindle bearing	Code	GK1A156	GK1B156	GK1C156	GK2A181	GK2B181	GK2C181
	Order no.	0608800031	0608800020	0608800001	0608800006	0608800008	0608800021
	Max. torque	Nm	150	150	150	150	150
	Range of spring	mm	25	25	25	50	50
	Spring force	N	39-90	39-90	39-90	30-93	30-93
	Reduction		1	1	1	1	1
	Avg. efficiency		1	1	1	1	1
	Length A	mm	156	156	156	181	181
	Installation length	mm	170	170	170	195	195
	Weight	kg	0.9	0.9	0.9	1	1
1 Spindle bearing	Code	GK2A251	GK2B251	GK2C251	GL2A251	GL2B251	GL2C251
	Order no.	0608800048	0608800049	0608800050	0608800056	0608800057	0608800027
	Max. torque	Nm	150	150	150	150	150
	Range of spring	mm	50	50	50	50	50
	Spring force	N	30-93	30-93	30-93	30-93	30-93
	Reduction		1	1	1	1	1
	Avg. efficiency		1	1	1	1	1
	Length A	mm	251	251	251	319	319
	Installation length		265	265	265	333	333
	Weight	kg	1	1	1	2.1	2.1
2 Measurement transducer	Code	4DMC060	4DMC160				
	Order no.	0608820114	0608820115	You can configure your tightening spindle with a redundant measurement transducer from the same type. Connect both measurement transducers with the redundant adapter. For measurement transducer cables, see page 138.			
	Max. torque	Nm	60	160			
	Reduction		1	1			
	Avg. efficiency		1	1			
	Length	mm	182	182			
	Installation length A	mm	122	122			
	Weight	kg	1.6	1.6			
3 Redundant adapter	Code	4AR					
	Order no.	0608810022	When configuring with a redundant measurement transducer, the adapter connects both measurement transducers.				
	Reduction		1				
	Avg. efficiency		1				
	Installation length	mm	65				
	Weight	kg	0.8				

4 Adapter 	Code	4A		When configuring without a measurement transducer, the adapter connects the output drive and the planetary gearbox.
	Order no.	0 608 810 026		
	Reduction	1		
	Avg. efficiency	1		
	Installation length	mm	26.5	
Weight	kg	0.4		
5 Planetary gearbox 	Code	4GE19	4GE59	
	Order no.	0 608 720 056	0 608 720 040	
	Reduction	19.3	58.6	
	Avg. efficiency	0.93	0.9	
	Installation length	mm	82.9	
Weight	kg	0.7	1.1	
6 Transverse gearbox 	Code	4ULG		The transverse gearbox shortens the length of your tightening spindle by the installation length of the EC motor plus the installation length of the transverse gearbox. The use of a transverse gearbox decreases the tightening spindle working area.
	Order no.	0 608 810 038		
	Reduction	1		
	Avg. efficiency	0.95		
	Installation length	mm	41.3	
Weight	kg	1.3		
7 EC motor 	Code	EC304		
	Order no.	0 608 701 018		
	Installation length	mm	247	
	Weight	kg	2.7	

Side-by-side arrangement of tightening spindles (center-to-center distance)

Number of tightening spindles	2	3	4	5	6
					
Min. circle diameter- \varnothing d_{\min} mm	G...	59	69	89	109

Tightening spindles size 4 Offset output drive



- ▶ Working range 6–340 Nm
- ▶ Max. output drive speed 1000 rpm

Depending on the size, the actual components may differ from those in the illustration.


Features





- ▶ For tight hole templates, side-by-side arrangement with small center-to-center distances
- ▶ Standard tool mounts
- ▶ Easy assembly due to flange connection
- ▶ Maintenance-free for 1 million full-load cycles





Tightening spindle		Offset output drive				Measurement transducer	Planetary gearbox	EC motor
Working range*	Max. output drive speed rpm	Range of spring mm	Tool mount	Code	Order no.	Code/Order no.	Code/Order no.	Code/Order no.
6–51	1000	50	1/2" square drive	VNK2A181/251	0 608 800 632 / 633	4DMC060 0 608 820 114	4GE19 0 608 720 056	EC304 0 608 701 018
			7/16" change chuck	VNK2B181/251	0 608 800 634 / 635			
			1/2" square drive with centering pin	VNK2C181/251	0 608 800 636 / 637			
			1/2" square drive	VNL2A319	0 608 800 639			
			1/2" square drive with centering pin	VNL2C319	0 608 800 643			
	340	50	1/2" square drive	VNK2A181/251	0 608 800 632 / 633	4DMC060 0 608 820 114	4GE59 0 608 720 040	
			7/16" change chuck	VNK2B181/251	0 608 800 634 / 635			
			1/2" square drive with centering pin	VNK2C181/251	0 608 800 636 / 637			
			1/2" square drive	VNL2A319	0 608 800 639			
			1/2" square drive with centering pin	VNL2C319	0 608 800 643			
8–75	740	50	3/4" square drive	VUK2D242	0 608 PE0 588	4DMC060 0 608 820 114	4GE19 0 608 720 056	EC304 0 608 701 018
	240	50	3/4" square drive	VUK2D242	0 608 PE0 588			
13–120	410	50	3/4" square drive	VUK2D186	0 608 800 644	4DMC060 0 608 820 114	4GE19 0 608 720 056	EC304 0 608 701 018
				VUL2D290	0 608 800 645			
13–130	135	50	3/4" square drive	VUK2D186	0 608 800 644	4DMC060 0 608 820 114	4GE59 0 608 720 040	EC304 0 608 701 018
				VUL2D290	0 608 800 645			
15–145	340	50	1/2" square drive	VNK2A181/251	0 608 800 632 / 633	4DMC160 0 608 820 115	4GE59 0 608 720 040	EC304 0 608 701 018
			7/16" quick-change chuck	VNK2B181/251	0 608 800 634 / 635			
			1/2" square drive with centering pin	VNK2C181/251	0 608 800 636 / 637			
			1/2" square drive	VNL2A319	0 608 800 639			
			1/2" square drive with centering pin	VNL2C319	0 608 800 643			
20–200	240	50	3/4" square drive	VUK2D242	0 608 PE0 588	4DMC160 0 608 820 115	4GE59 0 608 720 040	EC304 0 608 701 018
35–340	135	50	3/4" square drive	VUK2D186	0 608 800 644	4DMC160 0 608 820 115	4GE59 0 608 720 040	EC304 0 608 701 018
				VUL2D290	0 608 800 645			



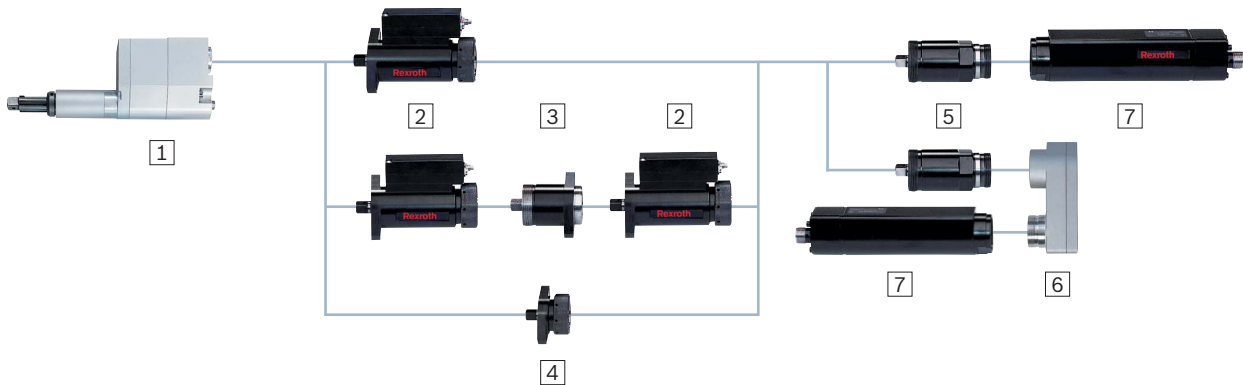


* The accuracy within the working range is $\pm 2\%$ over 6 s.

Note: You can find component dimensions and 3D/CAD data on the Internet at www.boschrexroth.com/tightening

Offset output drive size 4
Components


1 Offset output drive	Code	VNK2A181	VNK2B181	VNK2C181	VNK2A251	VNK2B251	VNK2C251
		Order no.	0608800632	0608800634	0608800636	0608800633	0608800635
	Max. torque	Nm 150	150	150	150	150	150
	Range of spring	mm 50	50	50	50	50	50
	Spring force	N 30–93	30–93	30–93	30–93	30–93	30–93
	Reduction	1	1	1	1	1	1
	Avg. efficiency	0.91	0.91	0.91	0.91	0.91	0.91
	Length A	mm 182	182	182	252	252	252
	Installation length	mm 309	309	309	379	379	379
	Weight	kg 3.4	3.4	3.4	4.0	4.0	4.0
1 Offset output drive	Code	VNL2A181	VNL2C181	VUK2D242	VUK2D186	VUL2D290	
		Order no.	0608800639	0608800643	0608PE0588	0608800644	0608800645
	Max. torque	Nm 150	150	200	340	340	
	Range of spring	mm 50	50	50	50	50	
	Spring force	N 30–93	30–93	30–93	30–93	30–93	
	Reduction	1	1	1.46	2.56	2.56	
	Avg. efficiency	0.91	0.91	0.92	0.92	0.92	
	Length A	mm 182	182	182	252	252	
	Installation length	448	448	370	354	458	
	Weight	kg 4.5	4.5	5.8	7.5	8.5	
2 Measurement transducer	Code	4DMC060	4DMC160				
		Order no.	0608820114	0608820115	You can configure your tightening spindle with a redundant measurement transducer from the same type. Connect both measurement transducers with the redundant adapter. For measurement transducer cables, see page 138.		
	Max. torque	Nm 60	160				
	Reduction	1	1				
	Avg. efficiency	1	1				
	Length	mm 182	182				
	Installation length A	mm 122	122				
	Weight	kg 1.6	1.6				
3 Redundant adapter	Code	4AR					
		Order no.	0608810022	When configuring with a redundant measurement transducer, the adapter connects both measurement transducers			
	Reduction	1					
	Avg. efficiency	1					
	Installation length	mm 65					
	Weight	kg 0.8					

4 Adapter 	Code	4A		When configuring without a measurement transducer, the adapter connects the output drive and the planetary gearbox.
	Order no.	0 608 810 026		
	Reduction	1		
	Avg. efficiency	1		
	Installation length	mm	26.5	
Weight	kg	0.4		
5 Planetary gearbox 	Code	4GE19	4GE59	
	Order no.	0 608 720 056	0 608 720 040	
	Reduction	19.3	58.6	
	Avg. efficiency	0.93	0.9	
	Installation length	mm	82.9	105.5
Weight	kg	0.7	1.1	
6 Transverse gearbox 	Code	4ULG		The transverse gearbox shortens the length of your tightening spindle by the installation length of the EC motor plus the installation length of the transverse gearbox. The use of a transverse gearbox decreases the tightening spindle working area.
	Order no.	0 608 810 038		
	Reduction	1		
	Avg. efficiency	0.95		
	Installation length	mm	41.3	
Weight	kg	1.3		
7 EC motor 	Code	EC304		
	Order no.	0 608 701 018		
	Installation length	mm	247	
Weight	kg	2.7		

Side-by-side arrangement of tightening spindles (center-to-center distance)						
Number of tightening spindles		2	3	4	5	6
						
Min. circle diameter- \varnothing d _{min} mm	VN...	44	51	63	75	88
	VU...	57	66	81	97	114
	VUK2D242	48	56	68	82	96

Tightening spindles size 4 Offset output drive with integrated measurement transducer



- ▶ Working range 15–342 Nm
- ▶ Max. output drive speed 1000 rpm

Depending on the size, the actual components may differ from those in the illustration.

Features

- ▶ Reduced center-to-center distances
- ▶ Torque measurement directly at the bolt
- ▶ Proximity switching digital measurement transfer
- ▶ Efficiency fluctuations do not affect measurements


Tightening spindle		Offset output drive with integrated measurement transducer				Planetary gearbox	EC motor
Working range* Nm	Max. output drive speed rpm	Range of spring mm	Tool mount	Code	Order no.	Code/ Order no.	Code/ Order no.
15-47	1000	80	1/2" square drive	4VMC150	0608801004	4GE19	EC304
21-65	700	80	3/4" square drive	4VMC210	0608801005	0608720056	0608701018
36-117	410	80	3/4" square drive	4VMC360	0608801006		
15-142	340	80	1/2" square drive	4VMC150	0608801004	4GE59	
21-200	240	80	3/4" square drive	4VMC210	0608801005	0608720040	
36-342	135	80	3/4" square drive	4VMC360	0608801006		





* The accuracy within the working range is $\pm 2\%$ over 6 s.




Note: You can find component dimensions and 3D/CAD data on the Internet at www.boschrexroth.com/tightening

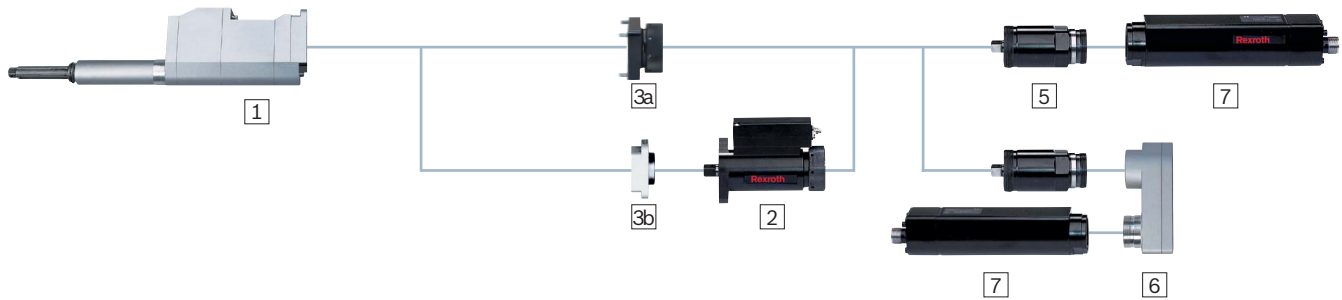




Offset output drive with integrated measurement transducer size 4

Components



1 Offset output drive with integrated measurement transducer 	Code	4VMC150	4VMC210	4VMC360	
	Order no.	0 608 801 004	0 608 801 005	0 608 801 006	
	Max. torque	Nm	150	210	360
	Range of spring	mm	80	80	80
	Spring force	N	30–100	30–100	30–100
	Reduction		1	1.46	2.56
	Avg. efficiency		0.92	0.92	0.92
	Length A	mm	242	252	246
	Installation length	mm	438	438	476
	Weight	kg	4.9	7.1	11.7
Nominal torque of measurement transducer	Nm	150	210	360	
2 Measurement transducer 	Code	4DMC060	4DMC160		
	Order no.	0 608 820 114	0 608 820 115	You can configure your tightening spindle with a redundant measurement transducer from the same type. Connect both measurement transducers with the redundant adapter. For measurement transducer cables, see page 138.	
	Max. torque	Nm	60	160	
	Reduction		1	1	
	Avg. efficiency		1	1	
	Installation length	mm	122	122	
Weight	kg	1.6	1.6		
3a AVG adapter 	Code	4AVG			
	Order no.	0 608 801 008		The adapter connects the output drive and the planetary gearbox.	
	Reduction		1		
	Avg. efficiency		1		
	Installation length	mm	26.5		
Weight	kg	0.4			
3b AVR Redundant adapter 	Code	4AVR			
	Order no.	0 608 801 007		When configuring an offset output drive with integrated measurement transducer and redundant measurement transducer, the adapter connects both components.	
	Reduction		1		
	Avg. efficiency		1		
	Installation length	mm	30.3		
Weight	kg	0.7			

5 Planetary gearbox	Code	4GE19	4GE59	
	Order no.	0 608 720 056	0 608 720 040	
	Reduction	19.3	58.6	
	Avg. efficiency	0.93	0.9	
	Installation length	mm	82.9	105.5
	Weight	kg	0.7	1.1
6 Transverse gearbox	Code	4ULG		
	Order no.	0 608 810 038	The transverse gearbox shortens the length of your tightening spindle by the installation length of the EC motor plus the installation length of the transverse gearbox. The use of a transverse gearbox decreases the tightening spindle working area.	
	Reduction	1		
	Avg. efficiency	0.95		
	Installation length	mm		41.3
	Weight	kg		1.3
7 EC motor	Code	EC304		
	Order no.	0 608 701 018		
	Installation length	mm	247	
	Weight	kg	2.7	

Side-by-side arrangement of tightening spindles (center-to-center distance)						
Number of tightening spindles		2	3	4	5	6
						
Min. circle diameter- \varnothing d _{min} mm	4VMC150	44	51	63	75	88
	4VMC210	48	56	68	82	96
	4VMC360	57	66	81	97	114

Tightening spindles size 4 Angle head



- ▶ Working range 6–220 Nm
- ▶ Max. output drive speed 985 rpm

Depending on the size, the actual components may differ from those in the illustration.

Features

- ▶ For restricted accessibility
- ▶ Precision tothing for high torque accuracy
- ▶ Incremental positioning
- ▶ Integrated fastening flanges
- ▶ With integrated measurement transducer on request

Tightening spindle		Angle head			Measurement transducer	Planetary gear-box	EC motor
Working range* Nm	Max. output drive speed rpm	Tool mount	Code	Order no.	Code/ Order no.	Code/ Order no.	Code/ Order no.
6-52	985	1/2" square drive	4W130	0608810045	4DMC060 0608820114	4GE19 0608720056	EC304 0608701018
6-56	320	1/2" square drive	4W130	0608810045	4DMC060 0608820114	4GE59 0608720040	
9-83	620	3/4" square drive	4W220	0608810046	4DMC060 0608820114	4GE19 0608720056	
9-90	204	3/4" square drive	4W220	0608810046	4DMC060 0608820114	4GE59 0608720040	
15-130	320	1/2" square drive	4W130	0608810045	4DMC160 0608820115	4GE59 0608720040	
24-220	200	3/4" square drive	4W220	0608810046	4DMC160 0608820115	4GE59 0608720040	


* The accuracy within the working range is $\pm 2\%$ over 6 s.





To ensure troublefree operation, the angle head must always be operated with an output drive axial compensator, e.g. spindle bearing.




See page 21

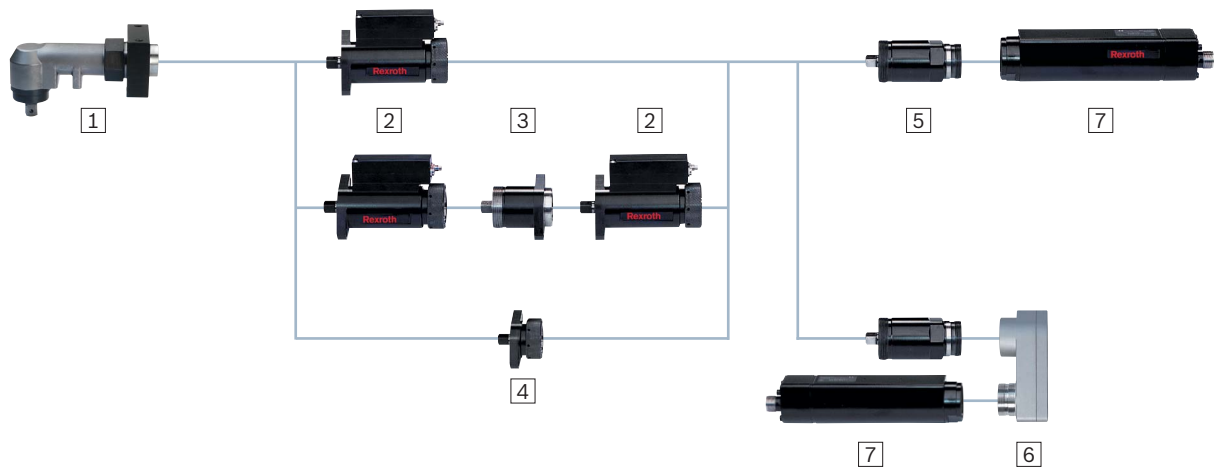




Note: You can find component dimensions and 3D/CAD data on the Internet at www.boschrexroth.com/tightening

Angle head size 4 Components



1 Angle head	Code	4W130	4W220	
	Order no.	0608810045	0608810046	
	Max. torque	Nm 130	220	
	Reduction	1.05	1.67	
	Avg. efficiency	0.95	0.95	
	Installation length	mm 141.5	141.5	
	Weight	kg 2.8	3.2	
2 Measurement transducer	Code	4DMC060	4DMC160	
	Order no.	0608820114	0608820115	You can configure your tightening spindle with a redundant measurement transducer from the same type. Connect both measurement transducers with the redundant adapter. For measurement transducer cables, see page 138.
	Nominal torque	Nm 60	160	
	Reduction	1	1	
	Avg. efficiency	1	1	
	Installation length	mm 122	122	
	Weight	kg 1.6	1.6	
3 Redundant adapter	Code	4AR		
	Order no.	0608810022		When configuring with a redundant measurement transducer, the adapter connects both measurement transducers
	Reduction	1		
	Avg. efficiency	1		
	Installation length	mm 65		
	Weight	kg 0.8		
4 Adapter	Code	4A		
	Order no.	0608810026		When configuring without a measurement transducer, the adapter connects the output drive and the planetary gearbox.
	Reduction	1		
	Avg. efficiency	1		
	Installation length	mm 26.5		
	Weight	kg 0.4		

5 Planetary gearbox 	Code	4GE19	4GE59
	Order no.	0 608 720 056	0 608 720 040
	Reduction	19.3	58.6
	Avg. efficiency	0.93	0.9
	Installation length	mm 82.9	105.5
	Weight	kg 0.7	1.1
6 Transverse gearbox 	Code	4ULG	
	Order no.	0 608 810 038	The transverse gearbox shortens the length of your tightening spindle by the installation length of the EC motor plus the installation length of the transverse gearbox.
	Reduction	1	The use of a transverse gearbox decreases the tightening spindle working area.
	Avg. efficiency	0.95	
	Installation length	mm 41.3	
	Weight	kg 1.3	
7 EC motor 	Code	EC304	
	Order no.	0 608 701 018	
	Installation length	mm 247	
	Weight	kg 2.7	

Side-by-side arrangement of tightening spindles (center-to-center distance)						
Number of tightening spindles		2	3	4	5	6
						
Min. circle diameter-Ø d _{min} mm	4W130	47	55	67	80	94
	4W220	62	72	88	106	124

Tightening spindles size 4 Feed output drive



- ▶ Working range 6–136 Nm
- ▶ Max. output drive speed 1000 rpm

Depending on the size, the actual components may differ from those in the illustration.

Features


- ▶ Integrated feed movement
- ▶ In connection with automatic bolt supply
- ▶ Standard tool mounts and compressed air connections
- ▶ Easy assembly due to flange connection
- ▶ Maintenance-free for 1 million full-load cycles





Tightening spindle			Feed output drive			Measurement transducer	Planetary gearbox	EC motor
Working range* Nm	Max. output drive speed rpm	Hub mm	Tool mount	Code	Order no.	Code/ Order no.	Code/ Order no.	Code/ Order no.
6-47	1000	200	1/2" square drive with centering pin	4S1M8	0 608 800 650	4DMC060 0608 820 114	4GE19 0608 720 056	EC304 0608 701 018
6-51	340	200	1/2" square drive with centering pin	4S1M8	0 608 800 650	4DMC060 0608 820 114	4GE59 0608 720 040	
15-136	340	200	1/2" square drive with centering pin	4S1M8	0 608 800 650	4DMC160 0608 820 115	4GE59 0608 720 040	




* The accuracy within the working range is $\pm 2\%$ over 6 s.



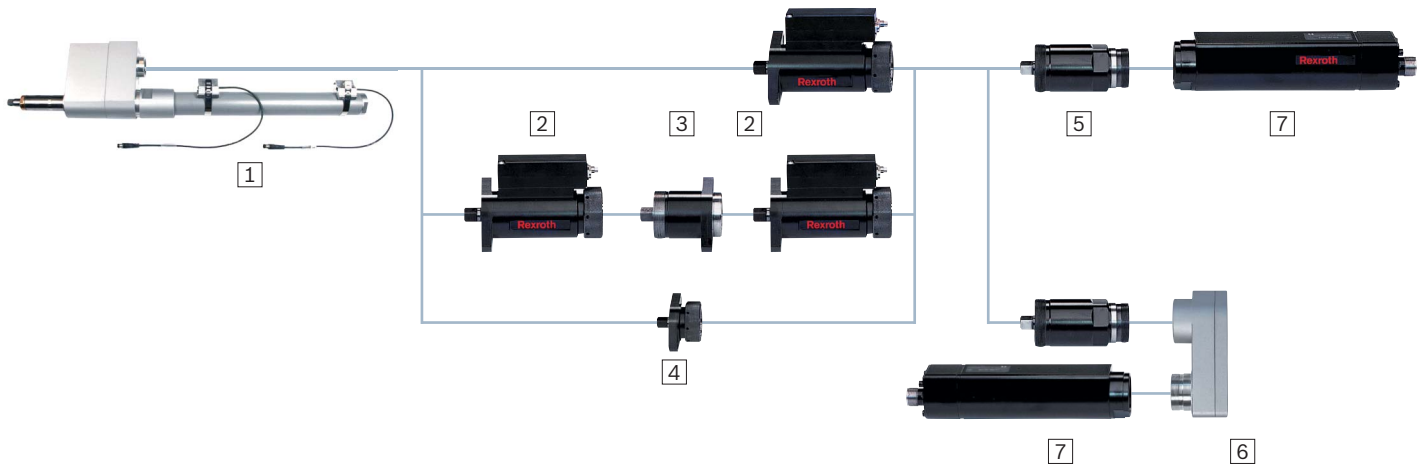


Note: You can find component dimensions and 3D/CAD data on the Internet at www.boschrexroth.com/tightening

**Feed output drive size 4
Components**



1 Feed output drive 	Code	4S1M8			
	Order no.		0608800650		
	Max. torque	Nm	150		
	Stroke	mm	200		
	Max. air pressure	bar	4		
	Reduction		1		
	Avg. efficiency		0.93		
	Length A	mm	101		
	Installation length	mm	219		
Weight	kg	6.6			
2 Measurement transducer 	Code	4DMC060	4DMC160		
	Order no.	0608820114	0608820115	You can configure your tightening spindle with a redundant measurement transducer from the same type. Connect both measurement transducers with the redundant adapter. For measurement transducer cables, see page 138.	
	Nominal torque	Nm	60		160
	Reduction		1		1
	Avg. efficiency		1		1
	Installation length	mm	122		122
Weight	kg	1.6	1.6		
3 Redundant adapter 	Code	4AR			
	Order no.		0608810022	When configuring with a redundant measurement transducer, the adapter connects both measurement transducers	
	Reduction		1		
	Avg. efficiency		1		
	Installation length	mm	65		
Weight	kg	0.8			
4 Adapter 	Code	4A			
	Order no.		0608810026	When configuring without a measurement transducer, the adapter connects the output drive and the planetary gearbox.	
	Reduction		1		
	Avg. efficiency		1		
	Installation length	mm	26.5		
Weight	kg	0.4			

5 Planetary gearbox	Code	4GE19	4GE59
	Order no.	0608720056	0608720040
	Reduction	19.3	58.6
	Avg. efficiency	0.93	0.9
	Installation length	mm 82.9	105.5
	Weight	kg 0.7	1.1
6 Transverse gearbox	Code	4ULG	
	Order no.	0608810038	The transverse gearbox shortens the length of your tightening spindle by the installation length of the EC motor plus the installation length of the transverse gearbox. The use of a transverse gearbox decreases the tightening spindle working area.
	Reduction	1	
	Avg. efficiency	0.95	
	Installation length	mm 41.3	
	Weight	kg 1.3	
7 EC motor	Code	EC304	
	Order no.	0608701018	
	Installation length	mm 247	
	Weight	kg 2.7	

Side-by-side arrangement of tightening spindles (center-to-center distance)						
Number of tightening spindles		2	3	4	5	6
						
Min. circle diameter- \varnothing d _{min} mm	4S1M8	56	65	79	95	112

Tightening spindles size 5 Spindle bearing



- ▶ Working range 5–500 Nm
- ▶ Max. output drive speed 515 rpm

Depending on the size, the actual components may differ from those in the illustration.

Features

- ▶ Various lengths with axial compensator
- ▶ Standard tool mounts
- ▶ Maximum efficiency
- ▶ Easy assembly due to flange connection
- ▶ Maintenance-free for 1 million full-load cycles


Tightening spindle			Spindle bearing			Measurement transducer	Planetary gearbox	EC motor
Working range*	Max. output drive speed	Range of spring mm / Max. Spring force N	Tool mount	Code	Order no.	Code / Order no.	Code / Order no.	Code / Order no.
Nm	rpm							
50–150	515	80/ 155	3/4" square drive with centering pin	GK3C281	0608800079	5DMC530	5GE19	EC305
				GK3C350	0608800081	0608820116	0608720058	0608701019
				GL3C418	0608800084			
50–500	145	80/ 155	3/4" square drive with centering pin	GK3C281	0608800079	5DMC530	5GE68	EC305
				GK3C350	0608800081	0608820116	0608720041	0608701019
				GL3C418	0608800084			





* The accuracy within the working range is $\pm 2\%$ over 6 s.




Note: You can find component dimensions and 3D/CAD data on the Internet at www.boschrexroth.com/tightening

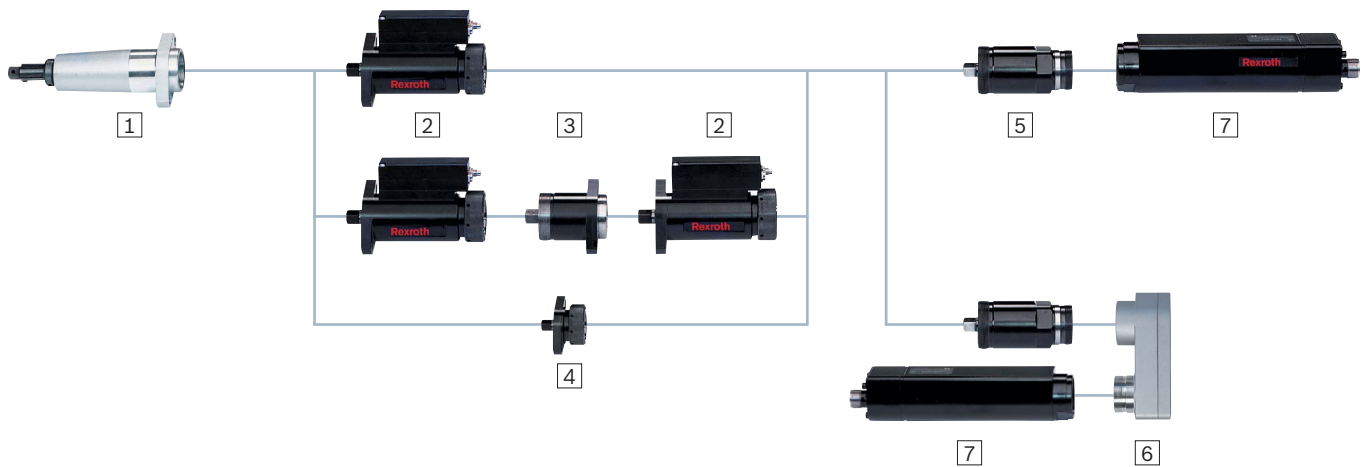




Spindle bearing size 5

Components



1 Spindle bearing	Code	GK3C281	GK3C350	GL3C418
	Order no.	0608800079	0608800081	0608800084
	Max. torque	Nm 500	500	500
	Range of spring	mm 80	80	80
	Spring force	N 40–155	40–155	40–155
	Reduction	1	1	1
	Avg. efficiency	1	1	1
	Length A	mm 284	353	421
	Installation length	mm 302	371	439
	Weight	kg 3	3.5	4.5
2 Measurement transducer	Code	5DMC530		
	Order no.	0608820116		
	Nominal torque	Nm 530		
	Reduction	1		
	Avg. efficiency	1		
	Installation length	mm 125.5		
	Weight	kg 3.7		
3 Redundant adapter	Code	5AR		
	Order no.	0608810023		
	Reduction	1		
	Avg. efficiency	1		
	Installation length	mm 108		
	Weight	kg 2.4		
4 Adapter	Code	5A		
	Order no.	0608810027		
	Reduction	1		
	Avg. efficiency	1		
	Installation length	mm 48.5		
	Weight	kg 2.2		

5 Planetary gearbox 	Code	5GE19	5GE68	
	Order no.	0608720058	0608720041	
	Reduction	19.3	67.9	
	Avg. efficiency	0.93	0.9	
	Installation length	mm 154	188	
	Weight	kg 2.9	3.7	
6 Transverse gearbox 	Code	5ULG		
	Order no.	0608810039		
	Reduction	1		
	Avg. efficiency	0.95		
	Installation length	mm 63.8	The transverse gearbox shortens the length of your tightening spindle by the installation length of the EC motor plus the installation length of the transverse gearbox. The use of a transverse gearbox decreases the tightening spindle working area.	
	Weight	kg 3.2		
7 EC motor 	Code	EC305		
	Order no.	0608701019		
	Installation length	mm 304		
	Weight	kg 6.4		

Side-by-side arrangement of tightening spindles (center-to-center distance)						
Number of tightening spindles		2	3	4	5	6
						
Min. circle diameter-Ø d _{min} mm	G...	86	100	131	162	172

Tightening spindles size 5 Offset output drive



- ▶ Working range 50–1000 Nm
- ▶ Max. output drive speed 515 rpm

Depending on the size, the actual components may differ from those in the illustration.

Features

- ▶ For tight hole templates
- ▶ Standard tool mounts
- ▶ Easy assembly due to flange connection
- ▶ Maintenance-free for 1 million full-load cycles


Tightening spindle			Offset output drive			Measurement transducer	Planetary gearbox	EC motor
Working range*	Max. output drive speed	Range of spring	Tool mount	Code	Order no.	Code/ Order no.	Code/ Order no.	Code/ Order no.
Nm	rpm	mm						
50-135	515	80	3/4" square drive with centering pin	VNK3C281	0 608 800 543	5DMC530	5GE19	EC305
				VNK3C350	0 608 800 545	0608820116	0608720058	0608701019
				VNL3C418	0 608 800 548			
115-335	200	80	1" square drive with centering pin	VUK3D316	0 608 PE0 017	5DMC530	5GE19	EC305
				VUK3D384	0 608 PE0 180	0608820116	0608720058	0608701019
50-465	145	80	3/4" square drive with centering pin	VNK3C281	0 608 800 543	5DMC530	5GE68	EC305
				VNK3C350	0 608 800 545	0608820116	0608720041	0608701019
				VNL3C418	0 608 800 548			
115-1000	55	80	1" square drive with centering pin	VUK3D316	0 608 PE0 017	5DMC530	5GE68	EC305
				VUK3D384	0 608 PE0 180	0608820116	0608720041	0608701019

* The accuracy within the working range is $\pm 2\%$ over 6 s.




Note: You can find component dimensions and 3D/CAD data on the Internet at www.boschrexroth.com/tightening



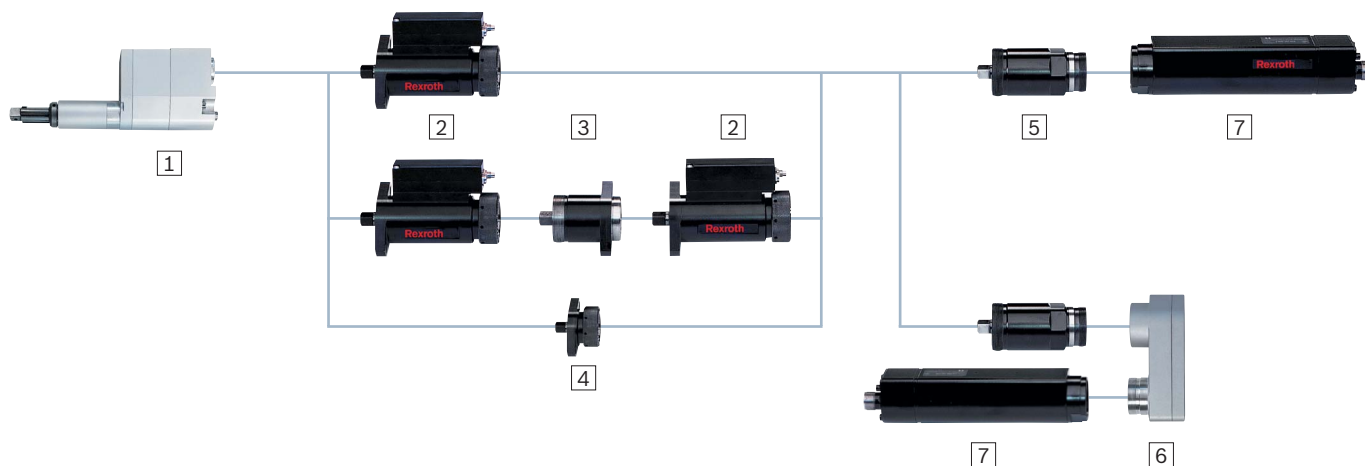


Offset output drive size 5

Components



1 Offset output drive	Code	VNK3C281	VNK3C350	VNL3C418	VUK3D316	VUK3D384
	Order no.	0608800543	0608800545	0608800548	0608PE0017	0608PE0180
	Max. torque	Nm 500	500	500	1000	1000
	Range of spring	mm 80	80	80	80	80
	Spring force	N 40–155	40–155	40–155	150–293	150–293
	Reduction	1	1	1	2.51	2.51
	Avg. efficiency	0.92	0.92	0.92	0.9	0.9
	Length A	mm 284	353	421	320	388
	Installation length	mm 482	551	619	572	640
	Weight	kg 11.7	11.7	12.9	30	32
2 Measurement transducer	Code	5DMC530				
	Order no.	0608820116			You can configure your tightening spindle with a redundant measurement transducer from the same type. Connect both measurement transducers with the redundant adapter. For measurement transducer cables, see page 138.	
	Nominal torque	Nm 530				
	Reduction	1				
	Avg. efficiency	1				
	Installation length	mm 125.5				
	Weight	kg 3.7				
3 Redundant adapter	Code	5AR				
	Order no.	0608810023			When configuring with a redundant measurement transducer, the adapter connects both measurement transducers	
	Reduction	1				
	Avg. efficiency	1				
	Installation length	mm 108				
	Weight	kg 2.4				
4 Adapter	Code	5A				
	Order no.	0608810027			When configuring without a measurement transducer, the adapter connects the output drive and the planetary gearbox	
	Reduction	1				
	Avg. efficiency	1				
	Installation length	mm 48.5				
	Weight	kg 2.2				

5 Planetary gearbox 	Code	5GE19	5GE68
	Order no.	0608720058	0608720041
	Reduction	19.3	67.9
	Avg. efficiency	0.93	0.9
	Installation length	mm 154	188
	Weight	kg 2.9	3.7
6 Transverse gearbox 	Code	5ULG	
	Order no.	0608810039	The transverse gearbox shortens the length of your tightening spindle by the installation length of the EC motor plus the installation length of the transverse gearbox. The use of a transverse gearbox decreases the tightening spindle working area.
	Reduction	1	
	Avg. efficiency	0.95	
	Installation length	mm 63.8	
	Weight	kg 3.2	
7 EC motor 	Code	EC305	
	Order no.	0608701019	
	Installation length	mm 304	
	Weight	kg 6.4	

Side-by-side arrangement of tightening spindles (center-to-center distance)						
Number of tightening spindles		2	3	4	5	6
						
Min. circle diameter-Ø d _{min} mm	VN...	61	71	87	104	122
	VU...	94	108	133	159	187

Accessories for tightening spindles



Angle heads for size 4 and 5 tightening spindles with or without stroke
On request



Angle heads with integrated measurement transducer
On request



Angle heads with counter bracket
On request



Block output drives
On request




Socket trays
On request



Programm selector switch
On request



Feed grippers
On request

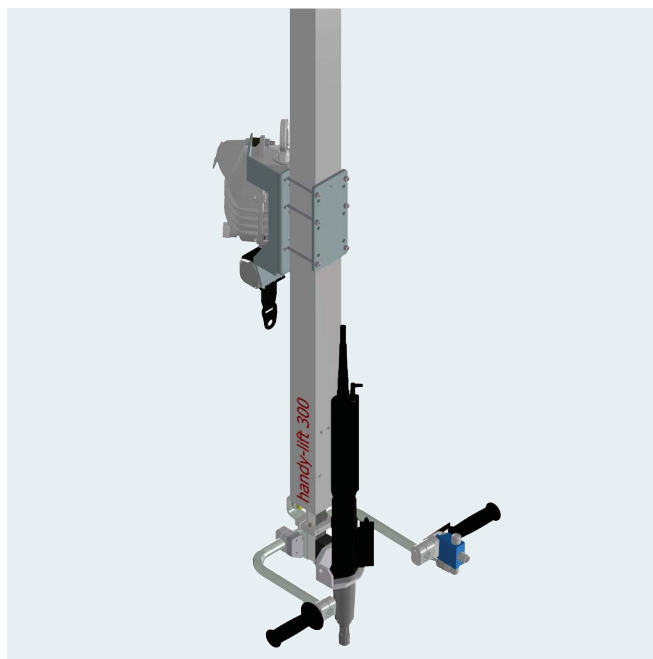

handy-lift®
On request

Customized solutions




- ▶ Handling devices with torque support for tightening spindles and ErgoSpin hand-held nutrunners.



- ▶ Telescopic balancer for fatigue-free work with hand-held tightening spindles thanks to low displacement resistance.




- ▶ Worker guides and automated solutions for all aspects of the tightening position



- ▶ Fully automatic tightening stations – also with nutrunner supply – that can be completely integrated into production lines.



- ▶ Roboter controlled wheel multiple for the automotive industry



- ▶ 8-spindle rear axle multiple for off-road vehicle

Ergonomic, powerful, handy

The ErgoSpin is designed according to the latest findings in ergonomics and fits the user's hand like a glove. The ergonomics of the handle, its light weight, and the optimum arrangement of operating and display elements increase worker productivity.

New: From now on, the angle compensation function can be activated for all ErgoSpin hand-held nutrunners with an integrated measurement transducer.



- ▶ Fast commissioning
- ▶ Flexible stock-keeping: only 1 cable type for all variants
- ▶ Maximum precision thanks to digital data transfer
- ▶ Ergonomic handling due to a rubber-coated angle head with a safety flange
- ▶ Process reliability thanks to clearly arranged display elements
- ▶ CC-ErgoSpin variant for function-critical tightening jobs



ESM

Pistolgrip nutrunner with integrated powerful LED for tightening position illumination



Gripline

Right-angle nutrunner with plastic-covered angle head for protection against scratches and accidental contacts as well as a second grip



SlimLine

Right-angle nutrunner with slim angle head for high accessibility.



Varioline

Zero-play spur gearing for free connection of crowfoot wrenches and special output drives

Hand-held nutrunner ESM ErgoSpin pistolgrip nutrunner for safety-critical tightening jobs



- ▶ With square tool mount, quick-change chuck, 1/4" or 3/8" square tool mount
- ▶ Working range 2.4 – 35 Nm
- ▶ Max. output drive speed 1700 rpm
- ▶ Suitable for safety-critical tightening jobs in accordance with VDI/VDE 2862

Features

- ▶ Pistolgrip nutrunner, also suitable for hard-to-reach tightening positions
- ▶ With integrated powerful LED
- ▶ Standard tool mounts
- ▶ Tested for one million cycles under full load without maintenance



ESM with square tool mount

- ▶ Working range 2.4 – 35 Nm
- ▶ Max. output drive speed 1700 rpm

Working range	Max. output drive speed	Tool mount	Weight	Installation length	Code	Order no.
Nm	rpm		kg	mm		
2.4–12	1090	1/4" square drive	1	190	ESM012SD-G	0608841254
5–25	1700	3/8" square drive	1.4	223	ESM025SD-G	0608841256
7–35	1025	3/8" square drive	1.4	223	ESM035SD-G	0608841258



ESM with quick-change chuck tool mount

- ▶ Working range 2.4 – 12 Nm
- ▶ Max. output drive speed 1090 rpm

Working range	Max. output drive speed	Tool mount	Weight	Installation length	Code	Order no.
Nm	rpm		kg	mm		
2.4–12	1090	1/4" quick-change chuck	1	201	ESM012QD-G	0608841255



ESM with 3/8" square tool mount

- ▶ Working range 5 – 25 Nm
- ▶ Max. output drive speed 1700 rpm

Working range	Max. output drive speed	Tool mount	Weight	Installation length	Code	Order no.
Nm	rpm		kg	mm		
5–25	1700	3/8" square drive and zero-play spur gearing for free connection of special output drives	1.4	223	ESM025HT-G	0608841257

Note: For special output drives and planetary gearboxes suitable for the ErgoSpin, see "Accessories for ErgoSpin / CC-ErgoSpin hand-held nutrunners" on page 92

Hand-held nutrunner ErgoSpin GripLine for safety-critical tightening jobs



- ▶ Working range 1 – 75 Nm
- ▶ Max. output drive speed 1000 rpm
- ▶ Suitable for safety-critical tightening jobs in accordance with VDI/VDE 2862

Features

- ▶ Standard tool mounts
- ▶ Tested for one million cycles under full load without maintenance

Working range Nm	Max. output drive speed rpm	Tool mount	Weight kg	Installation length mm	Code	Order no.
1-5	1000	1/4" square drive	1.3	385	ESA005G-G	0608841224
2.6-13	1000	1/4" square drive	1.3	385	ESA013G-G	0608841225
6-30	800	3/8" square drive	1.6	423.5	ESA030G-G	0608841226
8-40	1000	3/8" square drive	1.8	437	ESA040G-G	0608841227
11-56	710	3/8" square drive	1.9	453	ESA056G-G	0608841228
13-65	610	1/2" square drive	1.9	453	ESA065G-G	0608841229
15-75	530	1/2" square drive	2.1	454	ESA075G-G	0608841230

Hand-held nutrunner ErgoSpin SlimLine for safety-critical tightening jobs



- ▶ Working range 1 – 220 Nm
- ▶ Max. output drive speed 1000 rpm
- ▶ Suitable for safety-critical tightening jobs in accordance with VDI/VDE 2862

Features

- ▶ Angle head has a non-interchangeable code and can be turned and locked in 15-degree steps
- ▶ Integrated LEDs visible all around
- ▶ Tested for one million cycles under full load without maintenance

Working range Nm	Max. output drive speed rpm	Tool mount	Weight kg	Installation length mm	Code	Order no.
1–5	1000	1/4" square drive	1.3	382	ESA005S-G	0608841204
2.6–13	1000	1/4" square drive	1.3	382	ESA013S-G	0608841205
6–30	800	3/8" square drive	1.6	416	ESA030S-G	0608841206
8–40	1000	3/8" square drive	1.7	434	ESA040S-G	0608841207
11–56	710	3/8" square drive	1.9	446	ESA056S-G	0608841208
13–65	610	1/2" square drive	1.9	448	ESA065S-G	0608841209
15–75	530	1/2" square drive	2	450	ESA075S-G	0608841210
20–100	630	1/2" square drive	3.1	492	ESA100S-G	0608841211
30–150	380	1/2" square drive	3.8	531	ESA150S-G	0608841212
44–220	260	3/4" square drive	4	541	ESA220S-G	0608841213

Hand-held nutrunner ErgoSpin VarioLine for safety-critical tightening jobs



- ▶ Working range 1 – 146 Nm
- ▶ Max. output drive speed 1700 rpm
- ▶ Suitable for safety-critical tightening jobs in accordance with VDI/VDE 2862

Features

- ▶ Extended application options in combination with handling devices and special output drives (e.g. crowfoot wrenches)
- ▶ Can be used as a tightening spindle with output drive adapters
- ▶ Fully suitable for robot use
- ▶ Tested for one million cycles under full load without maintenance

Working range Nm	Max. output drive speed rpm	Tool mount	Weight kg	Installation length mm	Code	Order no.
1–5	1090	Standard machine with an output with zero-play spur gearing for the attachment of special output drives	1.1	333	ESV005-G	0608841243
2.4–12	1090		1.1	333	ESV012-G	0608841244
5–25	1700		1.4	365	ESV025-G	0608841245
10–50	830		1.5	375	ESV050-G	0608841246
14–73	900		2.4	406	ESV073-G	0608841247
29–146	420		2.8	430	ESV146-G	0608841248

Hand-held nutrunner

ESM CC-ErgoSpin pistolgrip nutrunner for function-critical tightening jobs



- ▶ Working range 2.4 – 25 Nm
- ▶ Max. output drive speed 1700 rpm
- ▶ Suitable for function-critical tightening jobs in accordance with VDI/VDE 2862

Features

- ▶ With integrated powerful LED
- ▶ Standard tool mounts
- ▶ Tested for one million cycles under full load without maintenance

Working range Nm	Max. output drive speed rpm	Tool mount	Weight kg	Installation length mm	Code	Order no.
2.4 – 12	1090	1/4" quick-change chuck	1	201	CC-ESM012QD	0608 841 089
5 – 25	1700	3/8" square drive and zero-play spur gearing for free connection of special output drives	1.4	223	CC-ESM025HT	0608 841 094

Note: For special output drives and planetary gearboxes suitable for the ErgoSpin, see "Accessories for ErgoSpin / CC-ErgoSpin hand-held nutrunners" on page 92.

Hand-held nutrunner CC-ErgoSpin SlimLine for function-critical tightening Jobs



- ▶ Working range 6–100 Nm
- ▶ Max. output drive speed 1000 rpm
- ▶ Suitable for function-critical tightening jobs in accordance with VDI/VDE 2862

Features

- ▶ Angle head has a non-interchangeable code and can be turned and locked in 15-degree steps
- ▶ Integrated LEDs visible all around
- ▶ Tested for one million cycles under full load without maintenance

Working range Nm	Max. output drive speed rpm	Tool mount	Weight kg	Installation length mm	Code	Order no.
6–30	800	3/8" square drive	1.6	416	CC-ESA030S	0608841087
8–40	1000	3/8" square drive	1.7	434	CC-ESA040S	0608841088
20–100	630	1/2" square drive	3.1	492	CC-ESA100S	0608841092

Hand-held nutrunner CC-ErgoSpin VarioLine for function-critical tightening Jobs



- ▶ Working range 2.4 – 146 Nm
- ▶ Max. output drive speed 1090 rpm
- ▶ Suitable for function-critical tightening jobs in accordance with VDI/VDE 2862

Features

- ▶ Extended application options in combination with handling devices and special output drives
- ▶ Can be used as a tightening spindle with output drive adapters
- ▶ Fully suitable for robot use
- ▶ Tested for one million cycles under full load without maintenance

Working range	Max. output drive speed	Tool mount	Weight	Installation length	Code	Order no.
Nm	rpm		kg	mm		
2.4–12	1090	Standard machine with an output with zero-play spur gearing for the attachment of special output drives	1.1	333	CC-ESV012	0608841090
10–50	830		1.5	376	CC-ESV050	0608841093
29–146	420		2.8	430	CC-ESV146	0608841091

Output drives for ErgoSpin/CC-ErgoSpin VarioLine

VarioLine hand-held nutrunner becomes a tightening spindle

- ▶ Extended application options in combination with handling devices

- ▶ Can be used as a tightening spindle with output drive adapters
- ▶ Fully suitable for robot use

Angle heads

You can mount different angle heads on the ErgoSpin VarioLine. This makes your ErgoSpin hand-held nutrunner suitable for a variety of applications.

With an angle head for special output drives, you can e.g. mount a crowfoot wrench to the VarioLine.

VarioLine combination options with angle heads



ErgoSpin VarioLine Code	Code	Tool mount	Weight kg	Max. torque** Nm	Reduction	Avg. efficiency	Order no.
ESV005/ CC-ESV005	WH013S	1/4" square drive	0.2	13	1.1	0.95	3608876051
	WH013G*	1/4" square drive	0.2	13	1.1	0.95	3608876052
ESV012/ CC-ESV012	WH013S	1/4" square drive	0.2	13	1.1	0.95	3608876051
	WH013G*	1/4" square drive	0.2	13	1.1	0.95	3608876052
ESV025	WH040S	3/8" square drive	0.4	40	1.73	0.95	3608876055
	WH040G*	3/8" square drive	0.4	40	1.73	0.95	3608876056
ESV050/ CC-ESV050	WH056S	3/8" square drive	0.5	56	1.16	0.95	3608876057
	WH056G*	3/8" square drive	0.6	56	1.16	0.95	3608876058
	WH065S	1/2" square drive	0.5	65	1.35	0.95	3608876059
	WH065G*	1/2" square drive	0.7	65	1.35	0.95	3608876060
	WH075S	1/2" square drive	0.5	75	1.56	0.95	3608876061
	WH075G*	1/2" square drive	0.7	75	1.56	0.95	3608876062
ESV073	WH100S	1/2" square drive	0.7	100	1.42	0.95	3608876063
ESV0146/ CC-ESV146	WH150S	1/2" square drive	1.0	150	1.1	0.95	3608876064
	WH220S	3/4" square drive	1.3	220	1.59	0.95	3608876065



ErgoSpin VarioLine Code	Code	Tool mount	Weight kg	Max. torque** Nm	Reduction	Avg. efficiency	Order no.
ESV025	WHS040	3/8" square drive	0.5	40	1.73	0.95	3608876081
ESV050/ CC-ESV050	WHS075	1/2" square drive	0.7	75	1.56	0.95	3608876082
ESV073	WHS100	1/2" square drive	0.9	100	1.42	0.95	3608876083

* Plastic-covered titanium angle head as a second grip
 ** Value refers to angle head

Straight output drives

Straight output drives combined with the ErgoSpin VarioLine produce a straight nutrunner. The combination of VarioLine and straight output drives always delivers an

ergonomic solution for tightening cases of up to 12 Nm: whether vertically suspended, as a hand-held straight nutrunner, a hand-held application, or in connection with handling devices.

VarioLine combination options with straight output drives*



ErgoSpin VarioLine Code	Working range Nm	Tool mount	Reduction	Avg. efficiency	Installation length mm	Weight kg	Code	Order no.
ESV005	1–5	1/4" square drive	1	1	31.5	0.1	ESISA012	0608810047
	1–5	1/4" quick-change chuck	1	1	31.5	0.1	ESIQA012	0608810048
ESV012/ CC- ESV012	2.4–12	1/4" square drive	1	1	31.5	0.1	ESISA012	0608810047
	2.4–12	1/4" quick-change chuck	1	1	31.5	0.1	ESIQA012	0608810048

Output drive adapters

With the output drive adapters, you can combine the ErgoSpin VarioLine with output drives in sizes 2, 3, and 4

for tightening spindles and e.g. use it as a tightening spindle.

VarioLine combination options with output drive adapters*



ErgoSpin VarioLine Code	Working range Nm	Tool mount	Reduction	Avg. efficiency	Installation length mm	Weight kg	Code	Order no.
ESV005	1–5	Size 2	1	1	41.4	0.1	ESOA012	0608810049
ESV012/ CC-ESV012	2.4–12	Size 2	1	1	41.4	0.1	ESOA012	0608810049
ESV025	5–25	Size 3	1	1	40.3	0.1	ESOA025	0608810050
ESV050/ CC-ESV050	10–50	Size 3	1	1	41.2	0.2	ESOA050	0608810051
ESV073	14–73	Size 4	1	1	44.5	0.3	ESOA073	0608810052
ESV146/ CC-ESV146	29–146	Size 4	1	1	44	0.3	ESOA146	0608810053

* Special output drives on request

Accessories for ErgoSpin / CC-ErgoSpin hand-held nutrunners



Holder for right-angle nutrunner and straight nutrunner

Code	Order no.
ESAT	3608876626



Holder for ESM pistolgrip nutrunner

Code	Order no.
ESMT	3608877433



Turning suspension

Code	Ø mm	ErgoSpin	Order no.	Weight g
ESMH1	50	ESA005-075	3608875426	100
		ESV005-050		
ESMH2	63	ESA100-220	3608875921	145
		ESV073-146		

Turning suspension for ErgoSpin with extension

On request



Suspension for ErgoSpin pistolgrip nutrunner

Code	Order no.
ESMB	3608876767



Extension

Code	Installation length mm	ErgoSpin	Order no.
ESET040	200	ESA040 / ESV025	On request
ESET056	250	ESA056 / ESV050	
ESET065	250	ESA065 / ESV050	
ESET075	250	ESA075 / ESV050	
ESET100	250	ESA100 / ESV073	



Extra grip

Code	ErgoSpin	Order no.
ESMH12	ESM012SD, ESM012QD	3 608 877 111
ESMH25	ESM025SD, ESM025HT, ESM035SD	3 608 877 112



Vertical suspension

Code	ErgoSpin	Order no.	Weight g
ESMV	ESA005-075 ESV005-050	3 608 875 435	180

**Start lever extension for straight nutrunners
incl. vertical suspension**


Code	ErgoSpin	Order no.	Weight g
ESTE	ESA005-075 ESV005-050	3 608 876 175	235

Accessories for ErgoSpin / CC-ErgoSpin hand-held nutrunners




Stroke extension

Code	Order no.
ESSE	3608876746

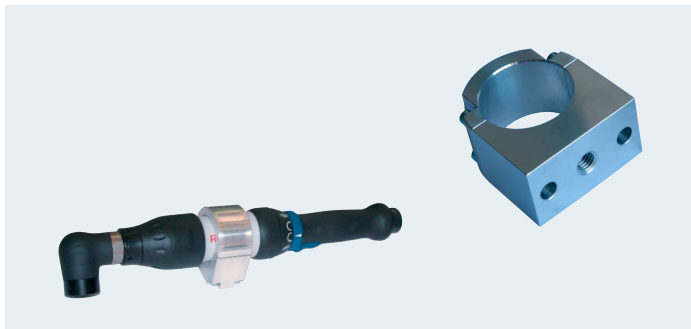

Adapter with holes for handling devices

Code	ErgoSpin	Order no.
ESCU1B	ESA005-075, ESV005-050	3608876459
ESCU2B	ESA100-220, ESV073-146	3608876409

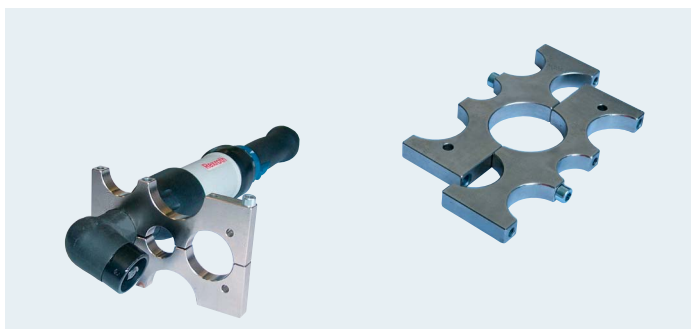

Adapter without holes for handling devices

Code	ErgoSpin	Order no.
ESCU1F	ESA005-075, ESV005-050	3608876751
ESCU2F	ESA100-220, ESV073-146	3608876749

Mounting aid for angle heads

Code	Order no.
ESWM	3608876473



Torque support with or without tool balancer

On request

You can choose from a large number of variants. The torque supports differ in drive direction (vertical/horizontal), extension length and torque range.



Socket tray

On request

You can choose from a large number of variants. The socket trays are available with four or eight slots and can be expanded to up to 32 slots with additional modules. The following connection variants are available: fieldbus connections (Profibus, Profinet, Ethernet/OpenModbus UDP/TCP) and 24V I/O, and Open Protocol.



ErgoSpin with integrated scanner

On request



Planetary gearboxes for high torques up to 100, 340, and 600 Nm

On request



Crowfoot wrench for ErgoSpin nutrunners


On request

Accessories for ErgoSpin / CC-ErgoSpin hand-held nutrunners



Program selector switch

On request

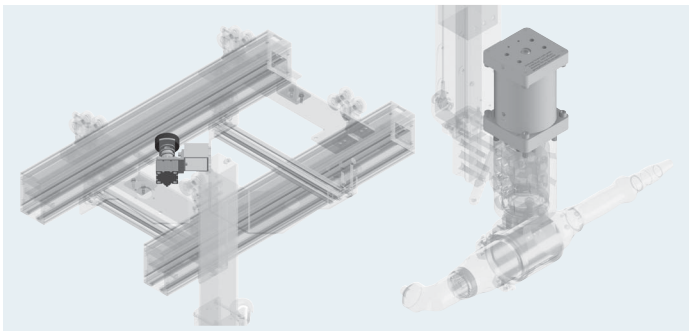

Brakes


On request



Handling devices

On request

Angle compensation function

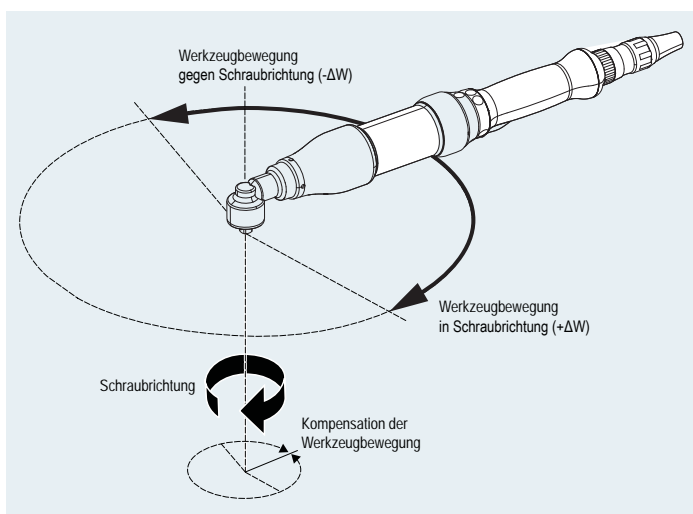

- ▶ Functionality available for all new ErgoSpin hand-held nutrunners
- ▶ Compensation of worker movement with triaxial sensors in real-time
- ▶ Measurement and output of the programmed actual angle of turn values
- ▶ Improvement of the joint quality especially in connection with angle-controlled target functions
- ▶ No alignment of the Bosch gyro sensor required thanks to triaxial sensor system



The angle compensation function is available for the Rexroth Tightening System 350 from software version V2.500 upwards. Activating the angle compensation function requires a license, which is available on a license stick. Each license stick contains exactly one license for a tightening channel. Please note the special sales release information on this topic. The license stick must be plugged into the corresponding control unit (interface X3U1, X3U2) for the function to be executed.

License stick

Code		Order no.
LS-ESG	1x License	3608830307

Free demo period

The angle compensation function can be tested for a maximum period of 30 days without licensing. Activation is only possible once for each channel on each controller.

Note:

It is possible to make changes to the angle head setting. Information on this can be found in the configuration description.

Nexo – intelligent cordless nutrunners

Rexroth intelligent cordless nutrunners join wireless technology with all the advantages of the proven ErgoSpin hand-held nutrunner for all category A safety-critical tightening jobs in accordance with VDI2862: Direct measurement of control and monitoring values and the storing of the fastening results for record keeping purposes.



- ▶ Fits easily into the existing infrastructure of any production environment
- ▶ Integrated controller
- ▶ Direct communication between the line PLC and the data collection server

Nexo cordless nutrunner NXP pistolgrip nutrunner



- ▶ Working range 1.8–12 Nm
- ▶ Max. output drive speed 880 rpm
- ▶ Suitable for safety-critical tightening jobs in accordance with VDI/VDE 2862

Features

- ▶ For troublefree working at hard-to-reach tightening positions
- ▶ Ergonomic design and maximum freedom of movement
- ▶ Graphic display: direct values of the tightening results, program selection, and process information
- ▶ Process reliability even without a connection to the WiFi network

Working range	Max. output drive speed	Tool mount	Weight without battery	Installation length without battery	Code	Order no.
Nm	rpm		kg	mm		
1.8–12	880	1/4" quick-change chuck	1.34	237	NXP012QD-36V	0608842005
1.8–12	880	1/4" quick-change chuck	1.34	237	NXP012QD-36V-B*	0608842010

* With integrated scanner

Nexo cordless nutrunner

NXA right-angle nutrunner



- ▶ Working range 3.0–65 Nm
- ▶ Max. output drive 850 rpm
- ▶ Suitable for safety-critical tightening jobs in accordance with VDI/VDE 2862

Features

- ▶ With slim angle head for high accessibility
- ▶ Graphic display: direct values of the tightening results, program selection, and process information
- ▶ Process reliability even without a connection to the WiFi network

Working range	Max. output drive speed	Tool mount	Weight without battery	Installation length without battery	Code	Order no.
Nm	rpm		kg	mm		
3.0–11	850	3/8" square drive	1.56	442	NXA011S-36V	0608842011
3.0–11	850	3/8" square drive	1.56	442	NXA011S-36V-B ¹	0608842012
3.0–15	600	3/8" square drive	1.56	442	NXA015S-36V	0608842001
3.0–15	600	3/8" square drive	1.56	442	NXA015S-36V-B ¹	0608842006
9–30	310	3/8" square drive	1.99	534	NXA030S-36V	0608842002
9–30	310	3/8" square drive	1.99	534	NXA030S-36V-B ¹	0608842007
15–50	185	3/8" square drive	2.03	534	NXA050S-36V	0608842003
15–50	185	3/8" square drive	2.03	534	NXA050S-36V-B ¹	0608842008
20–65	135	3/8" square drive	2.03	534	NXA065S-36V	0608842013
20–65	135	3/8" square drive	2.03	534	NXA065S-36V-B ¹	0608842014

* With integrated scanner

Nexo cordless nutrunner NXV VarioLine nutrunner



- ▶ Working range basic machine 1.8–12 Nm
- ▶ Working range with angle head 3.0–15 Nm
- ▶ Max. output drive 850 rpm
- ▶ Suitable for safety-critical tightening jobs in accordance with VDI/VDE 2862

Features

- ▶ With slim angle head for high accessibility
- ▶ Graphic display: direct values of the tightening results, program selection, and process information
- ▶ Process reliability even without a connection to the WiFi network

Working range	Max. output drive speed	Tool mount	Weight without battery	Installation length without battery	Code	Order no.
Nm	rpm		kg	mm		
3.0–15/1.8–12 ²	600/880 ²	Standard machine with an output with zero-play spur gearing for the attachment of special output drives	1.56/1.35 ²	442	NXV012T-36V	0608842015
3.0–15/1.8–12 ²	600/880 ²		1.56/1.35 ²	442	NXV012T-36V-B ¹	0608842016

Note

Delivery of basic machine with angle head

¹ With integrated scanner

² Values without output drive

Nexo – Accessories and extensions



Slide-in battery pack

Code	Quantity	Order no.
NX-BP36V	2	0 608 843 001



Simple charger

Code	Order no.
NX-BC36V	0 608 843 002

Battery charging cabinets for Rexroth slide-in battery packs on request



Assorted colored rings

Code	Quantity	Order no.
NX-R	21 (3 pieces of each color)	0 608 843 010



MicroSD card

Code	Order no.
NX-SD	0 608 843 005



Protective insulation for battery assembly

Code	Suitable for	Tool mount	Max. torque	Order no.
NXPP012	NXP12QD-36V	1/4" quick-change chuck	12 Nm	0 608 843 012



Protective insulation for battery assembly

Code	Suitable for	Tool mount	Max. torque	Order no.
NXAP030	NXA030S-36V NXA050S-36V NXA065S-36V	3/8" square drive	30 Nm	0 608 843 011



Protective cap for angle heads

Code	Suitable for	Quantity	Order no.
NXAPAH2	NXA030S-36V NXA050S-36V NXA065S-36V	5	0 608 843 015



Protective cap for angle heads

Code	Suitable for	Quantity	Order no.
NXAPAH1	NXA011S-36V NXA015S-36V	5	0 608 843 016

Nexo – accessories and extensions



Holder for right-angle nutrunners

Code	Order no.
ESAT	3608876626



Holder for pistolgrip nutrunners


Code	Order no.
NXPT	0608843008

Note: Cannot be used for pistolgrip nutrunners with protective insulation for battery assembly




Turning suspension for right-angle nutrunners

Code	Order no.
NXAMT	0608843003



Suspension for pistolgrip nutrunners

Code	Order no.
NXPB	0608843004



Extra grip for pistolgrip nutrunners

Code	Order no.
NXPH	0 608 843 009

Note: Cannot be used for pistolgrip nutrunners with protective insulation for battery assembly



Mounting aid for angle heads

Code	Suitable for	Order no.
ESMW	NXA030S-36V	3 608 876 473
	NXA050S-36V	
	NXA065S-36V	



Programming adapter*

Code	Order no.
NX-A2	0 608 843 020

*adapter supplied without ethernet cable



Access point*

Code	Order no.
NX-ACCESS	0 608 843 007

*without power supply unit


Nexo – accessories and extensions



**Nexo bracket for support systems
(e. g. positioning sensors)**

Code	Quantity	Order no.
NX-HD	2	0608843018

Nexo - Browser-based operating software NEXO-OS

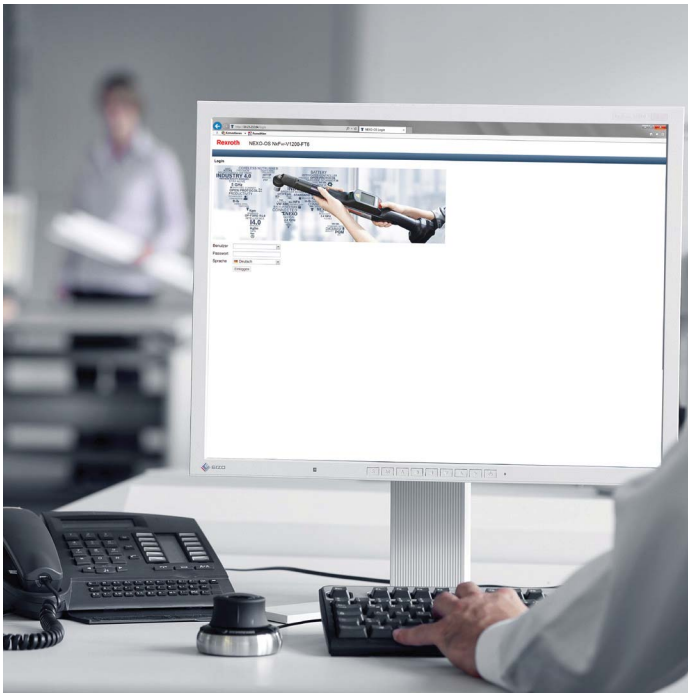

- ▶ Easy set-up as additional software installation is not necessary. Operating software can be used without local installation.
- ▶ Independence from end devices provides complete flexibility. Access to the browser-based software is not dependent on operating system nor end device.
- ▶ You can access the Nexo software by using any webbrowser enabled device.
- ▶ Easy to learn, easy to use: Programming of individual tightening tasks is simple via the intuitive graphic user interface.

Control and power electronics

The hardware platform is based on cutting-edge technology and thus ensures investment security. It has been specially developed for industrial applications. The system box and compact system fully comply with the IP54 protection class.



- ▶ Compact and powerful
- ▶ Secure and fast commissioning
- ▶ Sturdy: IP54
- ▶ Combination of tightening spindles/ErgoSpin
- ▶ Well arranged control and display elements
- ▶ Flexible connection to control and archive systems
- ▶ High process reliability due to internal self-diagnostics

Maximum flexibility in tightening spindle configuration – here are just some of the many options

One nutrunner – multiple nutrunners?

1 Compact system or modular system

1 tightening channel = CS351 Compact System

page 110

2 to 40 tightening channels = 350 modular system

page 116

350 modular system – where to store the system components?

2 BT card rack or SB system box

The card rack is designed for installation in a control cabinet.

Tightening systems without control cabinets are possible with the system box.

Universal communication – the KE communication unit

3 Configuration of the first BT card rack/first SB system box

VM power supply module

KE communication unit

SE control units

LTS/LTE servo amplifiers (tightening spindle/ErgoSpin respectively)

Max. 3 SE per BT/SP

Max. 5 LTS / LTE per BT / SB

1, 2, 3... and many more

4 Connecting multiple BT card racks/SB system boxes

Multiple BT/SB are connected to NK network couplers.

No KE is required from the 2nd BT/SB upwards.

Another LTS/LTE can be inserted in its position.

Configuration from 2nd BT/SB:

Max. 3 SE per BT/SP

Max. 6 LTS / LTE per BT / SB

CS351 Compact System

The operating and display units, as well as the connections, are arranged in a userfriendly, modern, and convincing design.

The clear structure of the CS351 allows intuitive operation without any complicated configuration. The housing, which is no larger than a minitower, fully complies with protection class IP54. Its compact interior combines power electronics and Ethernet-based bus systems with the new highperformance 350 control generation.



**TFT with touchscreen
(or display)**


Abrasion-resistant ID plate

Status display via LEDs

**Easy-to-access
USB programming interface**



- ▶ Compact and powerful
- ▶ Clear system design
- ▶ Secure and fast commissioning
- ▶ Tightening results at a glance
- ▶ Clearly arranged control and display elements
- ▶ Sturdy: IP54, EMC severity level IV
- ▶ USB and Ethernet-based bus systems
- ▶ Flexible adaptation to new tasks

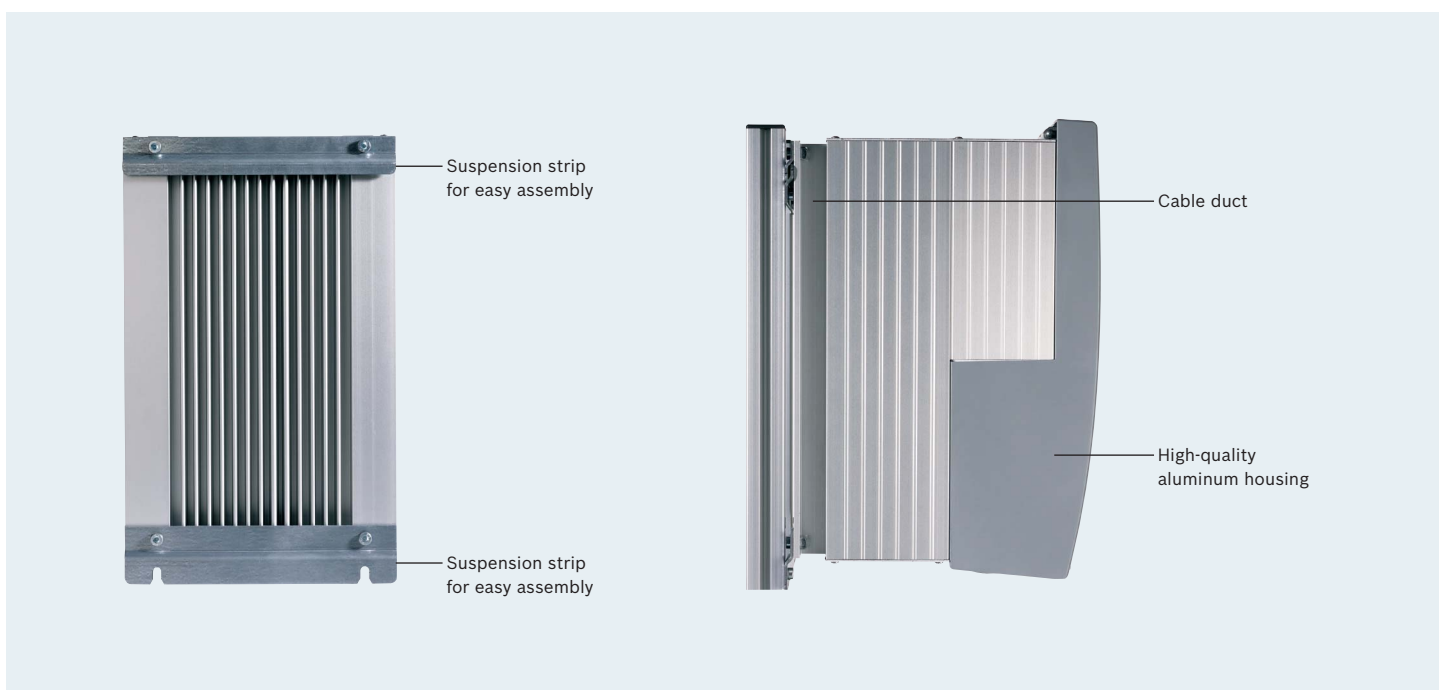

CS351 Compact System model variants



Compact System CS351...-G... High-quality TFT with touch screen and large viewing angle

- ▶ Resolution: 640 x 480
- ▶ Actual value display
- ▶ Tightening graph display
- ▶ Parameter changes
- ▶ Ethernet on board
- ▶ Tightening program selection

Compact System CS351...-D... Display version with DVI interface

- ▶ Actual value display
- ▶ Connection to external DVI monitor and input unit
- ▶ Ethernet on board

Compact System for	Code	Weight kg	Order no.
ErgoSpin	CS351E-G	9.7	0 608 830 258
	CS351E-D	9.5	0 608 830 257
	CS351E-G IL	9.7	0 608 830 275
	CS351E-D IL	9.5	0 608 830 274
	CS351E-D NK	9.9	0 608 830 281
Tightening spindle	CS351S-G	9.7	0 608 830 255
	CS351S-D	9.5	0 608 830 254
	CS351S-G IL	9.7	0 608 830 277
	CS351S-D IL	9.5	0 608 830 276
	CS351S-D NK	9.9	0 608 830 282

Note: For cable selection, see "Rexroth cables" from page 134.

CS351

- ▶ Dimensions (H x W x D): 358 x 210 x 253 mm
- ▶ Very easy suspension, even in tight areas
- ▶ Hinged, removable interface cover
- ▶ Highly flexible and future-proof due to interface modules
- ▶ IP54 protection class
- ▶ 120 V and 230 V power supply
- ▶ Mains connection cable for 230 V included in the scope of delivery
- ▶ Motor stop interface
- ▶ RCD with CS351E-...
- ▶ Exchange connection cable – without tools

* The speed of BG 4/5 motors is 15% lower with an operating voltage of 120 V than with an operating voltage of 230 V.

* The torque of the BG 5 motors is 30% lower with an operating voltage of 120 V than with an operating voltage of 230 V.

CS351... IL

- ▶ Integrated logic
- ▶ Flexible programming according to IEC 61131-3
- ▶ Easy automation for the entire tightening process

CS351...NK

- ▶ Can be connected as an additional tightening channel to the KE350/KE350G IL via the network coupler cable
- ▶ Complete system bus diagnosis
- ▶ Central data output via the KE350/KE350G IL

Please note:

You can find the technical data for the Rexroth control electronics in the assembly instruction:
www.boschrexroth.com/tightening.

CC-CS351 Compact System for CC-ErgoSpin



- ▶ For CC-ErgoSpin hand-held nutrunner control
- ▶ Use in function and un-critical tightening applications

Features

- ▶ Secure and fast commissioning
- ▶ Tightening results at a glance
- ▶ Sturdy: IP54, EMC severity level IV
- ▶ USB and Ethernet interface
- ▶ Clear system design
- ▶ Flexible adaptation to new tasks
- ▶ Clearly arranged control and display elements

Compact System for	Code	Weight kg	Order no.
CC-ErgoSpin	CC-CS351E-D	9.5	0608 830 289

Please note: You can find the technical data for the Rexroth control electronics in the assembly instruction: www.boschrexroth.com/tightening.

Slots and connections

To ensure that the tightening system optimally matches your control environment today and in the future, it features three slots for interface modules, which are covered with dummy panels at the factory.

The CS351E-D... and CS351S-D... Compact Systems have an additional DVI interface to connect an external monitor and a corresponding USB feedback channel.

To gain a better understanding of the slots, see “CS351 Compact System” from page 110.



- 1 Slot A for type A interface modules
- 2 USB host interface
(only for CS351S-D and CS351E-D)
- 3 Interface to connect
an external DVI monitor
(only for CS351S-D and CS351E-D)
- 4 Slot for CF350 mass storage
- 5 Ethernet
- 6 Serial interface
- 7 Two USB interfaces
- 8 Motor stop interface
- 9 Two slots (B1, B2)
for type B interface modules

Slot	Feldbus / Bezeichnung	Code	Order no.	Seite
A	PROFIBUS DP	IMpdp	0 608 830 266	132
	DeviceNet	IMdev	0 608 830 267	132
	PROFINET IO	IMpnio	0 608 830 272	132
	EtherCat	IMecat	0 608 830 302	133
	EtherNet/IP	IMenip	0 608 830 271	133
	ModbusTCP	IMmtcp	0 608 830 273	133
B	24-V I/O interface	IM24V	0 608 830 259	133
X6C1	Mass storage	CF350	3 608 877 428	–
XDAC1/XDAC2	Network coupler cable	NKL0.6	3 608 877 369	137/141
		NKL002	3 608 877 370	
		NKL005	3 608 877 371	
		NKL010	3 608 877 372	
		NKLF*	3 608 877 373/...	

Note: For cable selection, see “Rexroth cables” from page 134.

Modular system



- ▶ Multi-channel tightening system
- ▶ Can be upgraded to up to 40 tightening channels
- ▶ Combination of tightening spindles/ErgoSpin
- ▶ Uncomplicated programming
- ▶ Either in card rack or system box
- ▶ Convenient installation thanks to modularity



The splash-proof SB356 system box is intended for operation without a control cabinet in an industrial environment.



The BT356 card rack is intended for installation in control cabinets.

The SB356 system box and the BT356 card rack, made from durable stainless steel, are required in the modular system to support the control and power electronics.


Besides the VM350 power supply module, the BT/SB can also be equipped with up to six tightening channels. The tightening channels comprise an SE352 or SE352M control unit that controls up to two LTS350D servo amplifiers for tightening spindles or LTE350D servo amplifiers for ErgoSpin hand-held nutrunners. Mixed operation of tightening spindles and ErgoSpin on a SE352 or SE352M is possible at any time.

The KE350 or KE350G IL communication unit is responsible for internal and external system communication. It is inserted in the outermost BT/SB slot, instead of the sixth servo amplifier. When the KE350 or KE350G IL is inserted in the first SB or the

first BT, up to 16 BT/SB can be connected via the NK350 or NK350S network coupler and NKL network coupler cables.


The flexibly programmable logic integrated in the KE350G IL is in compliance with IEC 61131-3 and gives the user countless automation options for the entire tightening process.

Unused slots must be closed off with dummy panels for safety reasons and for reasons of electromagnetic compatibility.

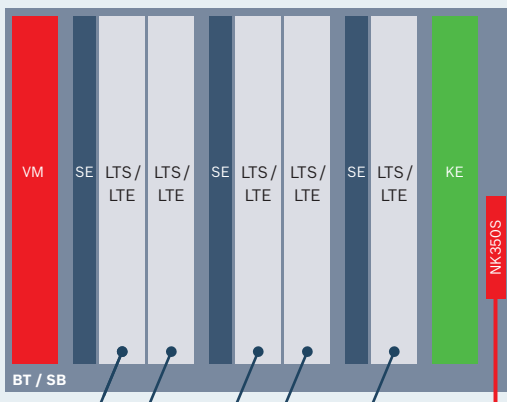

1 card rack/system box for up to 5 tightening channels and communication unit

- BT** Card rack
- SB** System box
- VM** Power supply module
- KE** Communication unit
- SE** Control unit
- LTS** Servo amplifier for tightening spindles
- LTE** Servo amplifier for ErgoSpin hand-held nutrunners
- NK** Network coupler

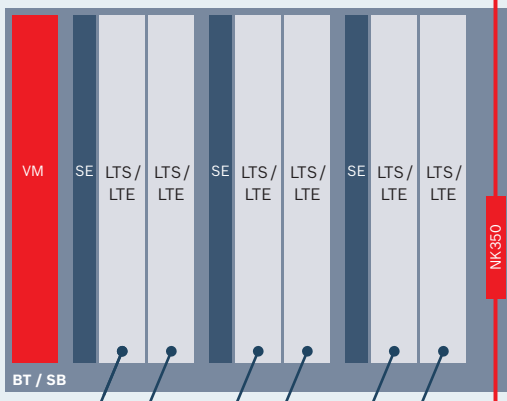

Combination of multiple card racks/system boxes for up to 40 tightening channels

Max. 6 tightening channels per BT/SB

Max. total length of all network coupling cables: 150 m


Maximum length of one network coupling cable: 50 m

Control of max. 40 tightening channels with one KE350 (up to 16 network couplers)

Reliable system bus with diagnostics capabilities

Multi-colored LED on network coupler for network status display

Type and timing of the incoming signals are processed and supplied to the nearest NK350.

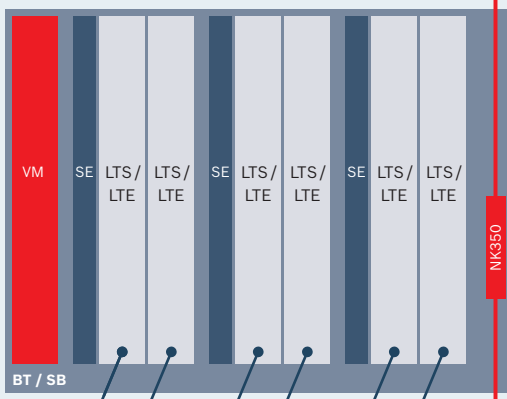

SB356 System Box



- ▶ To accommodate the control and power electronics for up to six tightening channels
- ▶ IP54 protection class

Features

- ▶ Designed for operation without control cabinet
- ▶ For networking of up to 16 BT/SB (with NK350 or NK350S network coupler and NKL network coupler cables)
- ▶ Compact dimensions
- ▶ High packing density
- ▶ Combination of hand-held nutrunner and stationary spindle possible

Code	Dimensions W x H x D mm	Weight (empty) kg	Order no.
SB356	510x600x470	55	0608830251

SB356 system box configuration	Up to 5 channels, 1x SB356	Up to 40 channels, multiple SB356		Info on page
	SB 356 system box	First SB356 system box	Additional SB356 system boxes	
	Number of slots	Number of slots	Number of slots per SB356	
VM 350 power supply module	1	1	1	124
KE350 communication unit	1	1	–	127
SE352/SE352M control unit	3	3	3	125
LTS350D/LTE350D servo amplifier	5	5	6	126
Tightening channels	5	5	6	122/132
NK350S / NK350 network coupler	–	1x NK350S	1x NK350	128

Dummy panels





Empty slots are closed off with dummy panels.

Two versions are available:

BP351 closes off a KE or LT slot; BP352 simultaneously closes off an SE and an LT slot.



Non-standard locks for SB356

Code	Order no.
E1	3608874026
E16	3608874109
 3 mm	3608874027
 Fiat	3608874028
 Daimler	3608874029
 7 mm	3608874030

Required number of dummy panels for the BT356 card rack with KE350

Number of channels	BP351 3608878058	BP352 3608878060
1	2	2
2	1	2
3	1	1
4	0	1
5	0	0

Please note: You can find the technical data for the Rexroth control electronics in the assembly instruction: www.boschrexroth.com/tightening.

BT356 card rack



- ▶ To accommodate the control and power electronics for up to six tightening channels
- ▶ For assembly in the control cabinet or to the mounting plate using mounting brackets

Features

- ▶ For networking of up to 16 BT/SB (with NK350 or NK350S network coupler and NKL network coupler cables)
- ▶ Compact dimensions

Code	Dimensions W x H x D mm	Weight (empty) kg	Order no.
BT356	310x483x381	7	0608830253

BT356 system box configuration	Up to 5 channels, 1x BT356	Up to 40 channels, Multiple BT356		Info on page
	BT356 card rack	First BT356 card rack	Additional BT356 card racks	
	Number of slots	Number of slots	Number of slots per BT356	
VM 350 power supply module	1	1	1	124
KE350 communication unit	1	1	–	127
SE352/SE352M control unit	3	3	3	125
LTS350D/LTE350D servo amplifier	5	5	6	126
Tightening channels	5	5	6	122/132
NK350S / NK350 network coupler	–	1x NK350S	1x NK350	128

Please note: You can find the technical data for the Rexroth control electronics in the assembly instruction: www.boschrexroth.com/tightening.

Permissible configuration with BT356/SB356 Servo amplifiers

Planning assistance: system box and card rack configuration

One tightening channel consists of the following components:

- ▶ ErgoSpin hand-held nutrunner or tightening spindle
- ▶ Connection cable
- ▶ Control unit
- ▶ Servo amplifier

The KE350 or KE350G IL communication unit is responsible for internal and external system communication. If the appropriate control and power electronics are installed, both stationary tightening spindles and ErgoSpin hand-held nutrunners can be connected to and operated on the SB356 system box and the BT356 card rack. Mixed operation of stationary tightening spindles and ErgoSpin hand-held nutrunners on a system box or a card rack is possible at any time.

Not every configuration is permitted due to the fact that the power consumption of the servo amplifier depends on the

type of tightening spindle or ErgoSpin hand-held nutrunner that is connected. The maximum permissible peak current for up to six tightening channels in the card rack or system box is 140A. This is why you may only install components with a power consumption that does not exceed a total of 140 A.


Total power consumption (tightening spindles + ErgoSpin) ≤ 140 A

- ▶ Up to 40 tightening channels by combining multiple card racks/system boxes
- ▶ Maximum system reliability thanks to 100% digital data transfer
- ▶ Integrated system for hand-held nutrunners and stationary technology
- ▶ Scalable and open for extensions

Power consumption Ampere	Stationary tightening spindles				ErgoSpin hand-held nutrunners			
	45 A	28 A	14 A	7 A	50 A	33 A	18 A	11 A
Tightening spindle or ErgoSpin hand-held nutrunner	LTS350D servo amplifier + Tightening spindle size 5	LTS350D servo amplifier + Tightening spindle size 4	LTS350D servo amplifier + Tightening spindle size 3	LTS350D servo amplifier + Tightening spindle size 2	LTE 350D servo amplifier + ErgoSpin hand-held nutrunners ESA100S ESA150S ESA220S ESV073 ESV146	LTE 350D servo amplifier + ErgoSpin hand-held nutrunners ESA040... ESA056... ESA065... ESA075... ESM025... ESM035... ESV025 ESV050	LTE 350D servo amplifier + ErgoSpin hand-held nutrunners ESA030...	LTE 350D servo amplifier + ErgoSpin hand-held nutrunners ESA013... ESM012QD ESV005 ESV012

Example: wheel bolts

In this example, five wheel bolts on each side of the vehicle are tightened to 130 Nm using size 4 tightening spindles.

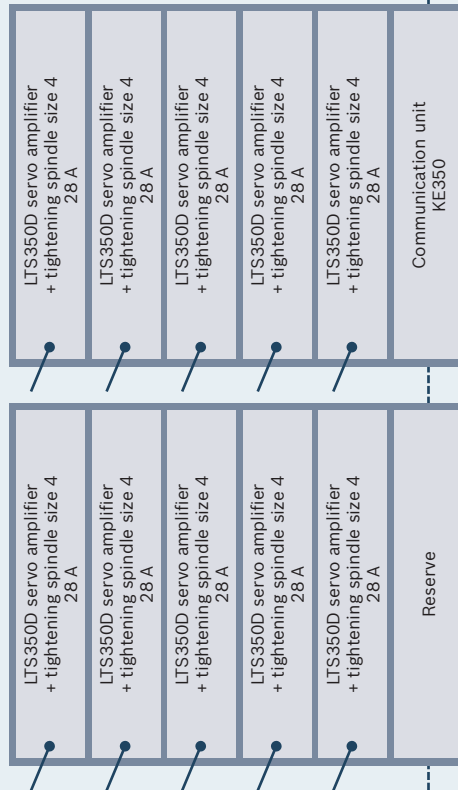**Ethernet connection**

BT/SB power consumption
 $5 \times 28 \text{ A} = 140 \text{ A} (\leq 140 \text{ A})$


Up to 5 tightening spindles can be operated on the first system box/first card rack.

Networking with network coupler

System boxes and card racks can be connected using network couplers.

Example: motor connection

In this example, the camshaft bearing cap and the cylinder head are each tightened to the motor with double nutrunners (size 3 and 4 tightening spindles) with 15 Nm and 130 Nm respectively. In addition, small parts are tightened with right-angle and pistolgrip nutrunners.

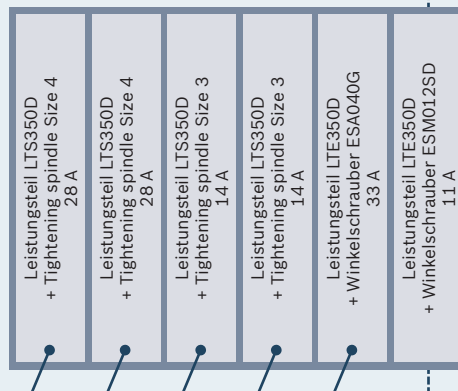**Networking with network coupler**

BT/SB power consumption
 $2 \times 28 \text{ A} + 2 \times 14 \text{ A} + 33 \text{ A} + 11 \text{ A} = 128 \text{ A}$
 $(\leq 140 \text{ A})$

Mixed operation with up to six tightening channels is possible on an SB356 system box or a BT356 card rack.

VM350 power supply module



- ▶ Used to supply power to all the slots in the BT356 card rack or in the SB356 system box.

Code	Order no.
VM350	0 608 750 110

Features

- ▶ One VM350 is required for each card rack or system box.
- ▶ 24 V interface (X1S1) on the front to ensure external power supply of the KE, SE, and LT in event of power failure or if the supply is switched off
- ▶ Integrated E-stop functionality (performance level d)
- ▶ 24 V power supply for external consumers

SE352 and SE352M control units



- ▶ To control and monitor the tightening process of up to two independent tightening channels per control unit
- ▶ For hand-held nutrunners and stationary spindles

Code	Order no.
SE352	0 608 830 262
SE352M	0 608 830 263



Example layout
SE352M with IM24V

Features

- ▶ Carries out system diagnosis and monitors all individual components of a tightening channel
- ▶ Tightening processes and rework strategies are simply and flexibly programmed via the BS350 operating system.
- ▶ Automatic recognition of individual components enables fast and secure start-up.
- ▶ The SE352M control unit is equipped with one free slot (on delivery, the SE352M control unit slot is sealed with a cover). An IM24V interface module can be inserted in this slot for communication with superior controllers.
- ▶ USB port interface used for the insertion of the license stick for the angle compensation functionality.

Servo amplifiers for tightening spindles and ErgoSpin/CC-ErgoSpin hand-held nutrunners



- ▶ For EC motor control
- ▶ Integrated motor contactor

Code		Order no.
LTS350D	For all tightening spindles	0 608 750 125
LTE350D	For all ErgoSpin/CC-ErgoSpin hand-held nutrunners	0 608 750 126

Features

- ▶ The control parameters are transmitted digitally from the SE control unit to the LT servo amplifier
- ▶ LC display for tightening results and system information
- ▶ Integrated E-stop functionality (performance level d)

KE350 and KE350G IL communication units



- ▶ To coordinate individual control units and organize the interfaces with external systems (e.g. PLC or central computer)

Code	Order no.
KE350	0 608 830 264
KE350G IL	0 608 830 265

Features

- ▶ System-internal communication with the control units occurs via a standard bus system
- ▶ One serial interface and three free slots for connecting to external systems
- ▶ Various interface modules are available for controlling and data communication
- ▶ On delivery, the slots in the KE350 and KE350G IL communication units are closed off with covers
- ▶ Integrated logics in KE350G IL: flexible programming in compliance with IEC 61131 3, enables countless automation options for the entire tightening process

Accessories for control and power electronics



Network coupler

Code	Order no.
NK350	3 608 877 367
NK350S*	3 608 877 368

*with integrated 24V power supply for the system bus



Dummy panels

Code	Order no.
BP351	3 608 878 058
BP352	3 608 878 060



Mounting bracket set for BT356

Code	Order no.
BTW356	3 608 878 116



Mass storage

Code	Order no.
CF350	3 608 877 428

Control cabinets



Ask us – we would be happy to advise you! With the BT356 card rack, the Rexroth modular system is ideally equipped for use in control cabinets. Benefit from our experience: we can offer you advice on which control cabinet is best suited to your production environment and how control and power electronics can be integrated easily. We provide control cabinets manufactured to your requirements as well as control cabinets in the following standard dimensions:

- ▶ 1800x600x500 mm (H x W x D)* for up to 18 tightening channels or 17 tightening channels plus KE350 / KE350G IL for tightening spindles in sizes 2, 3, and 4 (size 5 and mixed configurations available on request)
- ▶ 2000x600x500 mm (H x W x D)* for up to 24 tightening channels or 23 tightening channels plus KE350 / KE350G IL for tightening spindles in sizes 2 and 3 (sizes 4 and 5 and mixed configurations available on request)

The standard delivery color is RAL 7032.

Other options, e.g. other colors, are available on request.

Open and flexible: Interface modules

The interface modules are the connection between the tightening systems and the process controls. Today, Rexroth offers customers all common standards of fieldbuses such as PROFIBUS and DeviceNet as well as Ethernet-based fieldbus systems.






- ▶ Perfect network connection
- ▶ Connection between the tightening system, and the company's IT
- ▶ All standard fieldbuses
- ▶ Open, modular system concept for future standards





To ensure that the tightening system optimally matches your control environment today and in the future, free slots for interface modules are included on the CS351 Compact System, the KE350, and the KE350G IL.

On delivery, the slots are closed off with covers.


CS351...-D and KE350G IL have an additional DVI interface to connect an external monitor and a corresponding USB feedback channel.

	Slot	Fieldbus/designation	Code	Order no.	Description
	A	PROFIBUS DP	IMpdp	0 608 830 266	<ul style="list-style-type: none"> ▶ Data transfer via I/O level, e.g. for PLC functionality ▶ Insertion in the A slot of the KE350... or the CS351... ▶ Occupies a 400 byte address space on the fieldbus, which can be adjusted from 16I/16O points (2 bytes) to 512 I/512O points (128 bytes), as well as 0-64 bytes ID code and 0-242 bytes data ▶ The logical assignment of the control signals is set using the BS350 operating system.
	A	DeviceNet	IMdev	0 608 830 267	<ul style="list-style-type: none"> ▶ Data transfer via I/O level, e.g. for PLC functionality ▶ Insertion in the A slot of the KE350... or the CS351... ▶ Occupies a 512 byte address space on the fieldbus, which can be adjusted from 16 I/16O points (4 bytes) to 512 I/512O points (128 bytes), as well as a 0-64 bytes ID code ▶ The logical assignment of the control signals is set using the BS350 operating system.
	A	PROFINET IO	IMpnio	0 608 830 272	<ul style="list-style-type: none"> ▶ Complete PROFINET IO interface with IO device function (slave) ▶ Includes all analog and digital components of a powerful PROFINET IO interface connection ▶ Simple data transfer via I/O level ▶ Complies with the real-time classification (RT) of the PROFIBUS user organization ▶ Thanks to the standardized hardware and software interface to the KE350, KE350G IL and the CS351, it can be easily exchanged with other fieldbus modules of the same type.

	Slot	Fieldbus/designation	Code	Order no.	Description
	A	EtherCat	IMecat	0 608 830 302	<ul style="list-style-type: none"> ▶ Enables coupling of the tightening system (slave) to EtherCAT networks ▶ Data transfer possible via I/O level ▶ Easily interchangeable with other fieldbus modules of the same type
	A	EtherNet/IP	IMenip	0 608 830 271	<ul style="list-style-type: none"> ▶ Complete EtherNet/IP interface with adapter function (slave), includes all analog and digital components of a powerful EtherNet / IP connection ▶ Simple data transfer via I/O level ▶ Certified module tested for interoperability with leading EtherNet/IP scanner modules ▶ Thanks to the standardized hardware and software interface to the KE350, KE350G IL and the CS351, it can be easily exchanged with other fieldbus modules of the same type.
	A	ModbusTCP	IMmtcp	0 608 830 273	<ul style="list-style-type: none"> ▶ Complete ModbusTCP interface with server function (slave) ▶ Includes all analog and digital components of a powerful ModbusTCP interface connection ▶ Simple data transfer via I/O level ▶ Thanks to the standardized hardware and software interface to the KE350, KE350G IL and the CS351, it can be easily exchanged with other fieldbus modules of the same type.
	B	24-V-E/A-Schnittstelle	IM24V	0 608 830 259	<ul style="list-style-type: none"> ▶ Enables control over the tightening system and output of 24 V status signals via a 24 V interface ▶ Insertion in a corresponding slot on the KE350 or KE350G IL or the SE352M control unit ▶ Provides 10 inputs and 13 outputs. The outputs are short circuit-proof and protected against reverse polarity. ▶ Complies with DIN 19240.

Rexroth cables: consistent, digital data transfer

Precise control and consistently reliable measurements for checking tightening results are the outstanding features of tightening systems from Rexroth. This level of precision requires data transport that is always error-free. This is why the tightening systems from Rexroth are equipped with fully digital data communication.


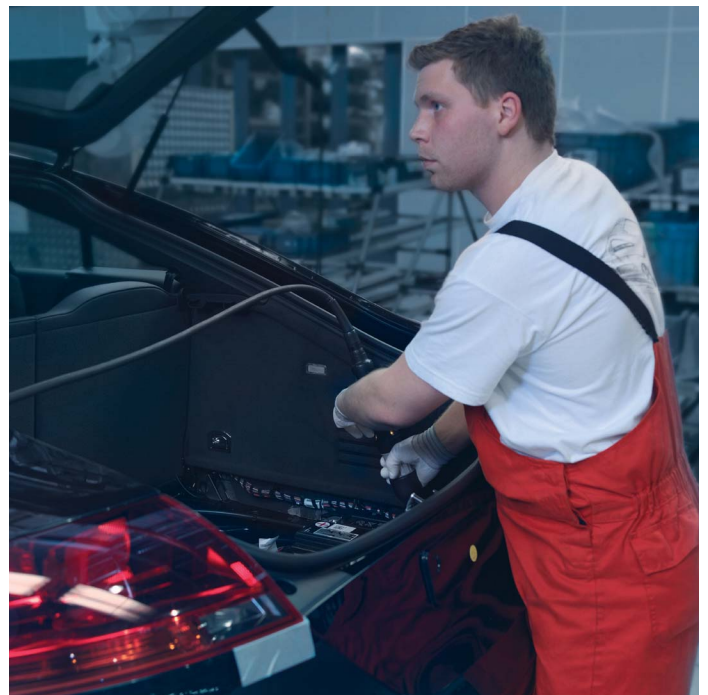


- ▶ Secure and reliable data transfer thanks to digital technology
- ▶ Maximum cable length of up to 100 meters enables flexible hall design
- ▶ Connection cables for tightening spindles are suitable for robot use
- ▶ Customer-specific cable lengths available



- ▶ Connection cables for joining tightening spindles with compact or modular systems
- ▶ Connection cables for joining hand-held nutrunners with compact or modular systems
- ▶ Extension cables for extending connection cables of tightening spindles with compact and modular systems
- ▶ Network coupler cables for connecting multiple modular systems
- ▶ Measurement transducer cables for connecting individual components of a tightening spindle
- ▶ USB programming cable for connecting a PC with compact or modular systems
- ▶ Mains connection cables for joining compact systems with a power socket (included in the scope of delivery in Europe)

Cables for tightening spindles with molded connectors

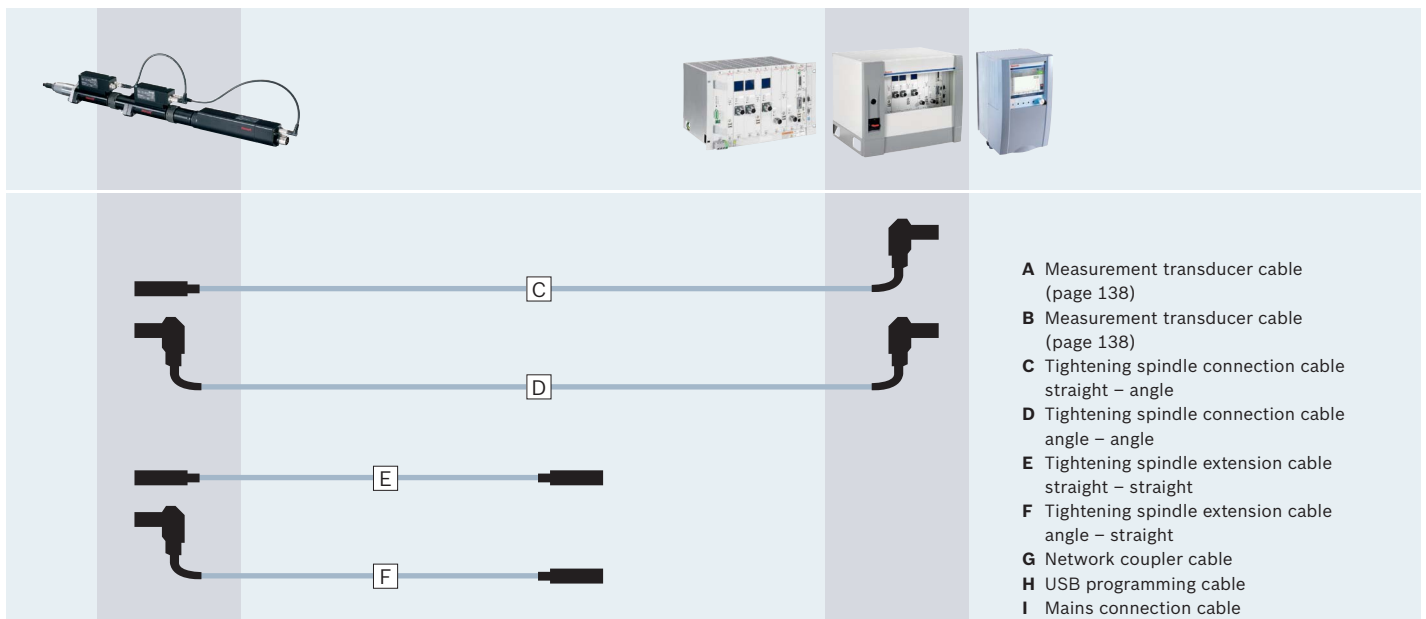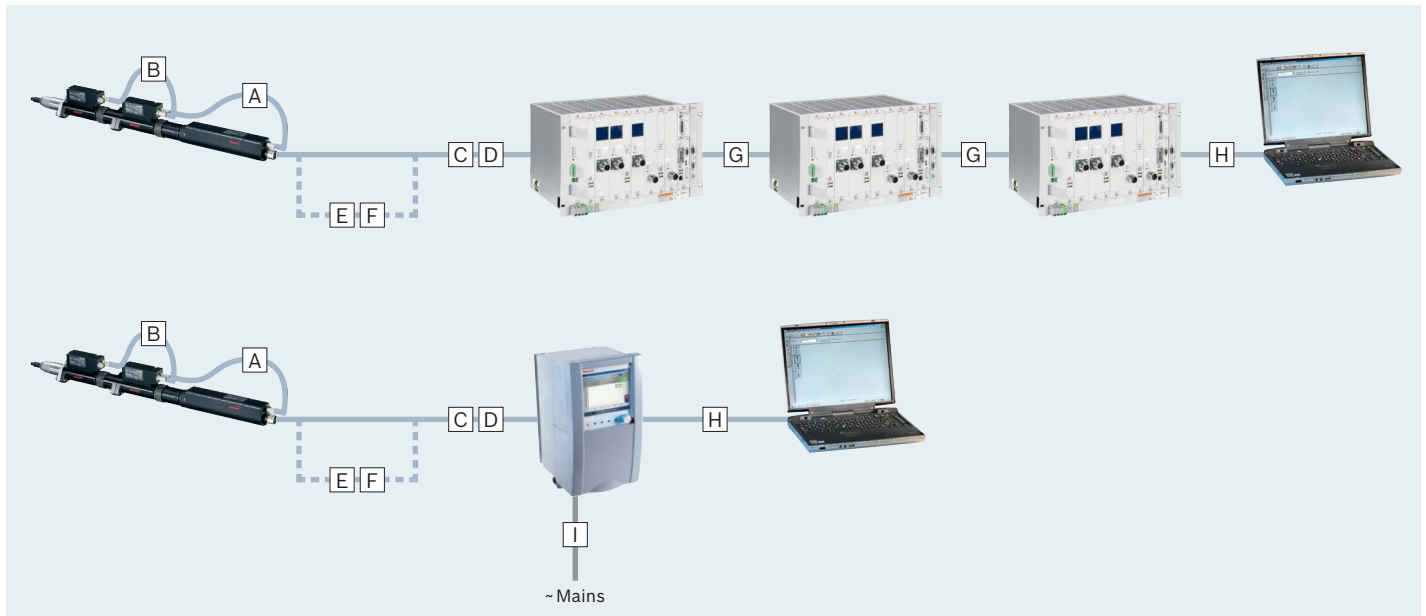

- A Measurement transducer cable (page 138)
- B Measurement transducer cable (page 138)
- C Tightening spindle connection cable straight – angle
- D Tightening spindle connection cable angle – angle
- E Tightening spindle extension cable straight – straight
- F Tightening spindle extension cable angle – straight
- G Network coupler cable
- H USB programming cable
- I Mains connection cable


Tightening spindle connection cable

The tightening spindle is connected to the CS351S... Compact System or the LTS350D servo amplifier via a connection cable. Up to 5 extension cables may be connected to the connection cable one after the other in

any order. For applications where the tightening spindle is in constant motion, we recommend constructing the connection from several individual parts.

Max. length of the connection cable:

- ▶ When connecting to a system box or card rack: 100 m
- ▶ When connecting to a Compact System: 50 m

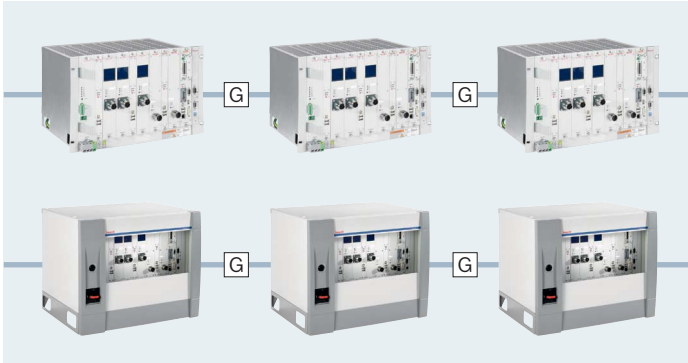

Connecting card racks and system boxes

The network coupler cables connect individual BT356 card racks and SB356 system boxes. A combination of card racks and system boxes is also possible. The length of the network coupler cable between the individual card racks / system boxes can be as much as 50 m. The total length of all network coupler cables may not exceed 150 m.

Note

To ensure function and system reliability at all times, only use the cables listed here. The connection cables for tightening spindles are suitable for robot use.

	Code	Order no.	Length m	Weight kg
C	S-003-S-A	0608740100	3	1
	S-005-S-A	0608740101	5	1.7
	S-007-S-A	0608740102	7	2.4
	S-010-S-A	0608740103	10	3.45
	S-015-S-A	0608740104	15	5.2
	S-020-S-A	0608740105	20	6.95
	S-FREE-S-A*	0608741100	>0.5	-
D	S-003-A-A	0608740110	3	1
	S-005-A-A	0608740111	5	1.7
	S-007-A-A	0608740112	7	2.4
	S-010-A-A	0608740113	10	3.45
	S-015-A-A	0608740114	15	5.2
	S-FREE-A-A*	0608741110	>0.5	-
E	S-EXT-003-S-S	0608740120	3	1
	S-EXT-005-S-S	0608740121	5	1.7
	S-EXT-007-S-S	0608740122	7	2.4
	S-EXT-010-S-S	0608740123	10	3.45
	S-EXT-015-S-S	0608740124	15	5.2
	S-EXT-020-S-S	0608740125	20	6.95
	S-EXT-FREE-S-S*	0608741120	>0.5	-
F	S-EXT-003-A-S	0608740130	3	1
	S-EXT-005-A-S	0608740131	5	1.7
	S-EXT-007-A-S	0608740132	7	2.4
	S-EXT-010-A-S	0608740133	10	3.45
	S-EXT-FREE-A-S*	0608741130	>0.5	-


	Code	Order no.	Length m	Weight kg
G	NKL0.6	3608877369	0.6	-
	NKL002	3608877370	2	-
	NKL003	3608879240	3	-
	NKL005	3608877371	5	-
	NKL010	3608877372	10	-
	NKLF*	3608877373 / ...	>0.5	-
H	USB350	3608877427	3	-
I	CS351USC (110V)**	3608877033	1.8	-

* The connection cables S-FREE-S-A [C], S-FREE-A-A [D] as well as extension cables S-EXT-FREE-S-S [E], S-EXT-FREE-A-S [F] and the network coupler cable NKLF [G] require a length specification in addition to the part number. The „FREE“ in the code stands for flexible cable lengths in 0.25-m increments. The length and order number must both be indicated on your order.

Ordering example: Connection cable [C] 17.75 m long is S-FREE-S-A 0 608 741 100 /17.5


** Mains connection cable, USA
(The mains connection cable is included in the standard scope of delivery for Europe.)

Measurement transducer cables

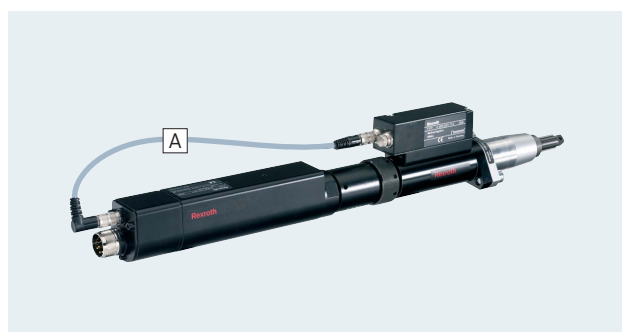

Tightening spindle with spindle bearing, offset output drive, or angle head

BG	A	Code	Order no.
2		ML036	0 608 830 171
3		ML036	0 608 830 171
4		ML046	0 608 830 222
5		ML061	0 608 830 223
5	With blocking adapter	ML061	0 608 830 236

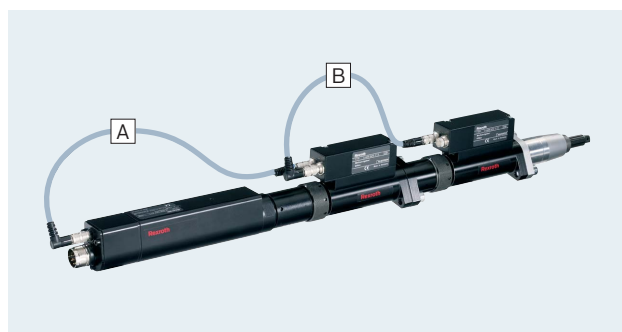


Tightening spindle with spindle bearing, offset output drive or angle head and redundant measurement transducer

BG	A	Code	Order no.	B	Code	Order no.
2		ML036	0 608 830 171		MLR033	0 608 830 174
3		ML036	0 608 830 171		MLR033	0 608 830 174
4		ML046	0 608 830 222		MLR033	0 608 830 174
5		ML061	0 608 830 223		MLR040	0 608 830 175




Tightening spindle with offset output drive with integrated measurement transducer

BG	VMC	A	Code	Order no.
3	3VMC0..		ML046	0 608 830 222
4	4VMC150		ML055	0 608 830 224
4	4VMC210		ML055	0 608 830 224
4	4VMC360		ML061	0 608 830 223

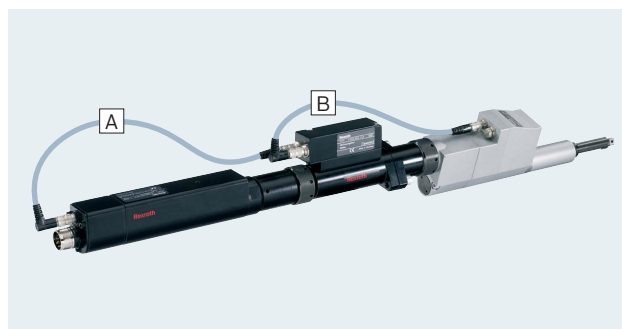


Tightening spindle with offset output drive with integrated measurement transducer and redundant measurement transducer

BG	VMC	A	Code	Order no.	B	Code	Order no.
3	3VMC0..		ML036	0 608 830 171		MLR045	0 608 830 225
4	4VMC150		ML046	0 608 830 222		MLR040	0 608 830 175
4	4VMC210		ML046	0 608 830 222		MLR040	0 608 830 175
4	4VMC360		ML046	0 608 830 222		MLR045	0 608 830 225

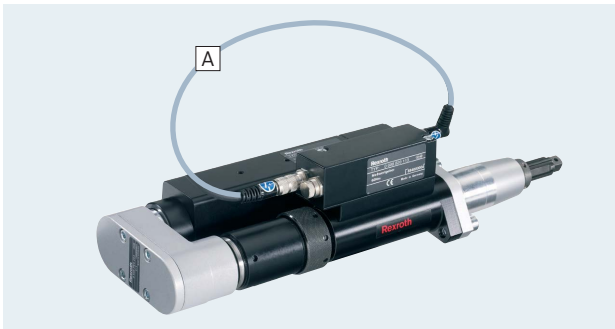


Tightening spindle with transverse gearbox

BG	A	Code	Order no.
2		ML046	0 608 830 222
3		ML046	0 608 830 222
4		ML046	0 608 830 222
5		ML061	0 608 830 223

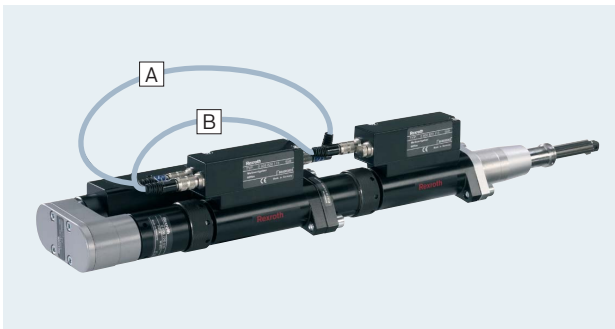


Tightening spindle with transverse gearbox and redundant measurement transducer

BG	A	Code	Order no.	B	Code	Order no.
2		ML046	0 608 830 222		MLR033	0 608 830 174
3		ML046	0 608 830 222		MLR033	0 608 830 174
4		ML046	0 608 830 222		MLR033	0 608 830 174
5		ML061	0 608 830 223		MLR040	0 608 830 175

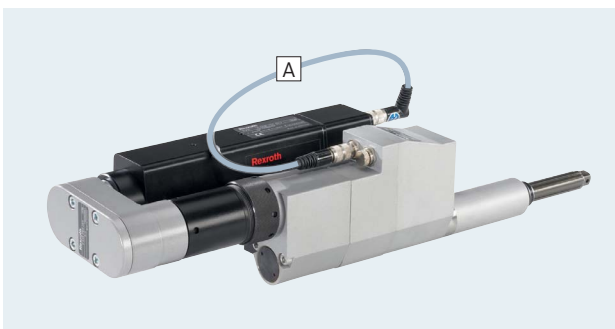

Tightening spindle with offset output drive with integrated measurement transducer and transverse gearbox



BG	VMC	A	Code	Order no.
3	3VMC0..		ML036	0 608 830 171
4	4VMC150		ML036	0 608 830 171
4	4VMC210		ML036	0 608 830 171
4	4VMC360		ML036	0 608 830 171

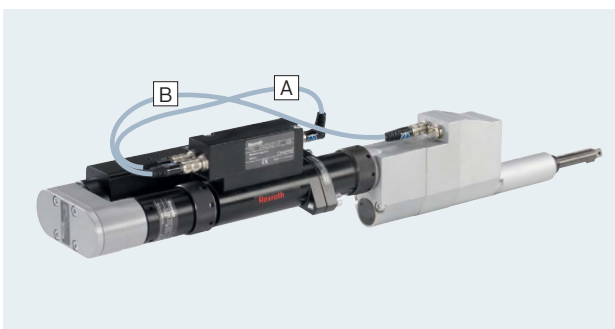

Tightening spindle with offset output drive with integrated measurement transducer and transverse gearbox and redundant measurement transducer

BG	VMC	A	Code	Order no.	B	Code	Order no.
3	3VMC0..		ML036	0 608 830 171		MLR045	0 608 830 225
4	4VMC150		ML036	0 608 830 171		MLR040	0 608 830 175
4	4VMC210		ML036	0 608 830 171		MLR040	0 608 830 175
4	4VMC360		ML036	0 608 830 171		MLR045	0 608 830 225

Cables for ErgoSpin hand-held nutrunners with molded connectors

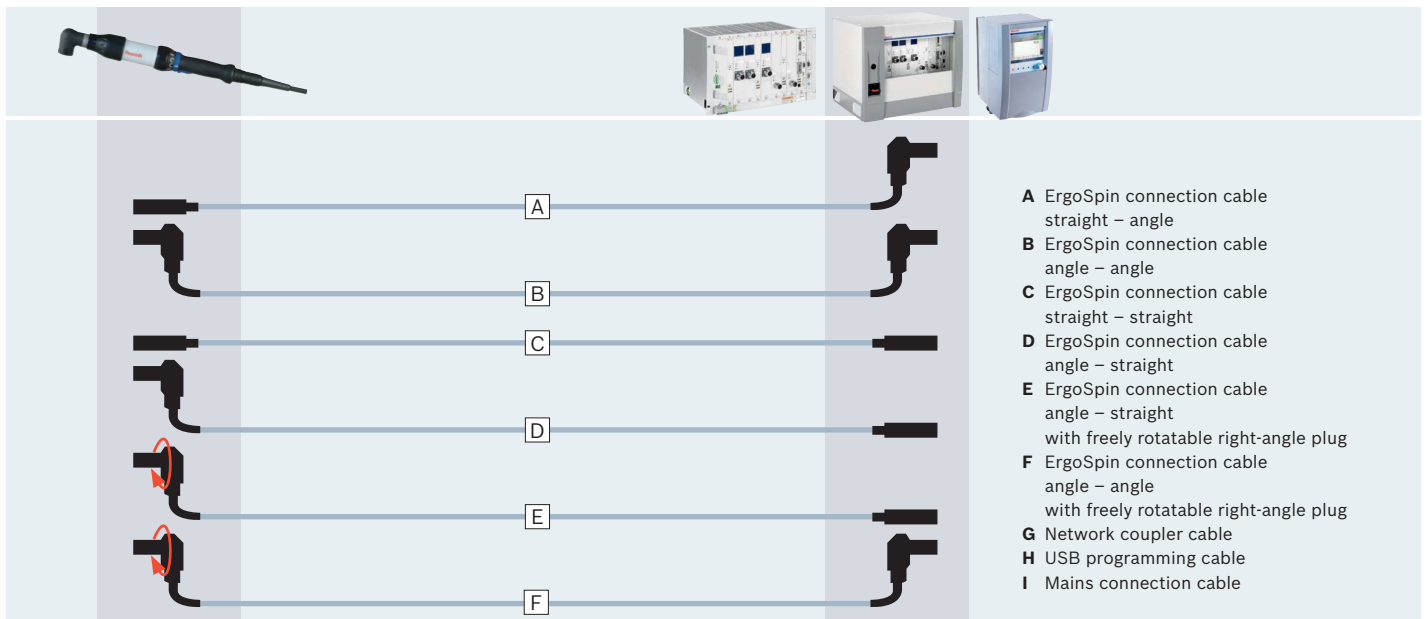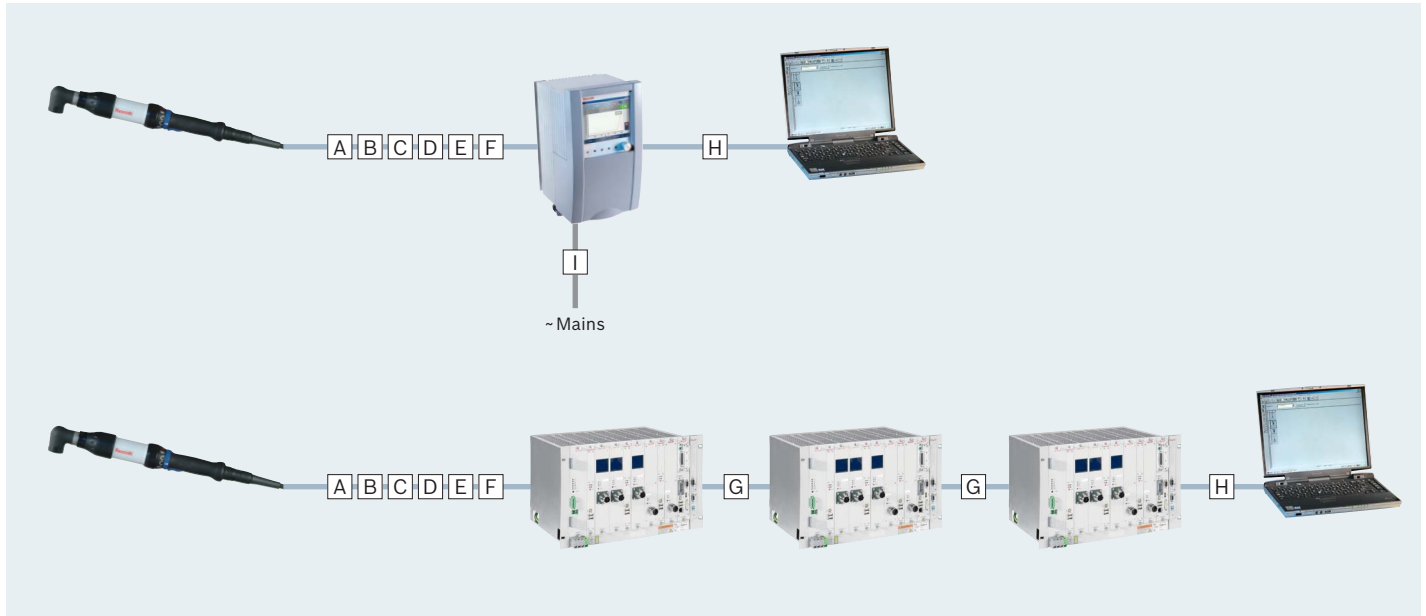


ErgoSpin connection cable

The ErgoSpin hand-held nutrunner is connected to the CS351E... Compact System or the LTE350D servo amplifier via a connection cable. Up to 5 of the connection cables listed at the side may be connected one after the other in

any order. For applications where the hand-held nutrunner is in constant motion, we recommend constructing the connection from several individual parts.

Max. length of the connection cable:

- ▶ When connecting to a system box or card rack: 100 m
- ▶ When connecting to a Compact System: 50 m

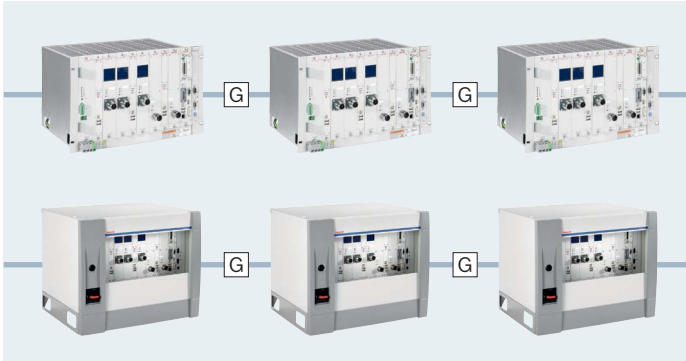

Connecting card racks and system boxes

The network coupler cables connect individual BT356 card racks and SB356 system boxes. A combination of card racks and system boxes is also possible. The length of the network coupler cable between the individual card racks / system boxes can be as much as 50 m. The total length of all network coupler cables may not exceed 150 m.

Note

To ensure function and system reliability at all times, only use the cables listed here.

The ErgoSpin connection cables are suitable for robot use.

	Code	Order no.	Länge m	Weight kg
A	E-003-S-A	0608740200	3	1
	E-005-S-A	0608740201	5	1.7
	E-007-S-A	0608740202	7	2.4
	E-010-S-A	0608740203	10	3.45
	E-015-S-A	0608740204	15	5.2
	E-020-S-A	0608740205	20	6.95
	E-FREE-S-A*	0608741200	>0.5	-
B	E-003-A-A	0608740210	3	1
	E-005-A-A	0608740211	5	1.7
	E-007-A-A	0608740212	7	2.4
	E-010-A-A	0608740213	10	3.45
	E-FREE-A-A*	0608741210	>0.5	-
C	E-003-S-S	0608740220	3	1
	E-005-S-S	0608740221	5	1.7
	E-007-S-S	0608740222	7	2.4
	E-010-S-S	0608740223	10	3.45
	E-FREE-S-S*	0608741220	>0.5	-
D	E-003-A-S	0608740230	3	1
	E-005-A-S	0608740231	5	1.7
	E-007-A-S	0608740232	7	2.4
	E-010-A-S	0608740233	10	3.45
	E-FREE-A-S*	0608741230	>0.5	-
E	E-003-ROT-A-S	0608740240	3	1
	E-005-ROT-A-S	0608740241	5	1.7
	E-007-ROT-A-S	0608740242	7	2.4
	E-010-ROT-A-S	0608740243	10	3.45
	E-FREE-ROT-A-S*	0608741240	>0.5	-

	Code	Order no.	Länge m	Weight kg
F	E-003-ROT-A-A	0608740250	3	1
	E-005-ROT-A-A	0608740251	5	1.7
	E-007-ROT-A-A	0608740252	7	2.4
	E-010-ROT-A-A	0608740253	10	3.45
	E-FREE-ROT-A-A*	0608741250	>0.5	-
G	NKL0.6	3608877369	0.6	-
	NKL002	3608877370	2	-
	NKL003	3608879240	3	-
	NKL005	3608877371	5	-
	NKL010	3608877372	10	-
	NKLF*	3608877373/...	>0.5	-
H	USB350	3608877427	3	-
I	CS351USC (110V)**	3608877033	1.8	-

* The connection cables E-FREE-S-A [A], E-FREE-A-A [B], E-FREE-S-S [C], E-FREE-A-S [D], E-FREE-ROT-A-S [E], E-FREE-ROT-A-A [F] and NKLF [G] require a length specification in addition to the part number. The „FREE“ in the code stands for flexible cable lengths in 0.25-m increments. The length and order number must both be indicated on your order.

Ordering example: Connection cable [A] 17.75 m long is E-FREE-S-A 0 608 741 200 / **17.75**



** Mains connection cable, USA
(The mains connection cable is included in the standard scope of delivery for Europe.)

The complete package: software and operating system

Easy configuration, parameterization and analysis: with the PC via the network or with the laptop on-site. This provides a flexible working environment and allows you to generate tightening programs as well as analyze tightening cases and conduct system tests. The user interface enables intuitive operation.



- ▶ Fast commissioning thanks to intuitive menu design
- ▶ Time-saving and mix-up-proof thanks to automatic detection of electronic components
- ▶ Simple entry of tightening process parameters
- ▶ Comprehensive selection of target and monitoring functions for adaptation to the individual tightening case
- ▶ Evaluation options using graphs and statistics for process optimization

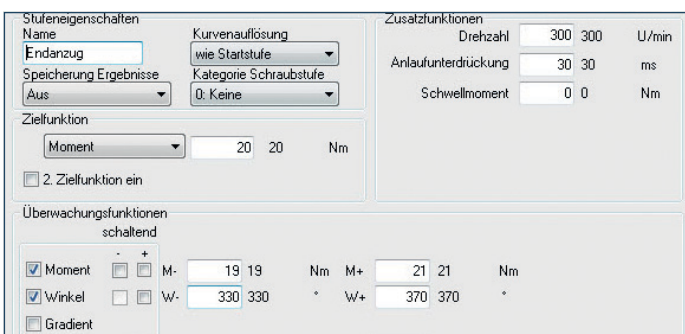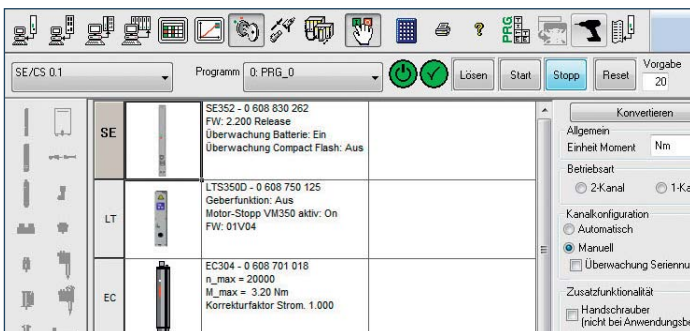


Configuration and programming


- ▶ Programming via convenient, icon-supported tools
- ▶ Configuration of tightening processes on the graphic interface
- ▶ Target and monitoring parameters are easily entered in the preset windows

Analysis

- ▶ Tightening graph for performing a quick tightening case analysis
- ▶ Good range with clear display of the state of the tightening results in the target window
- ▶ Histogram provides a quick overview of the statistical distribution of the tightening results

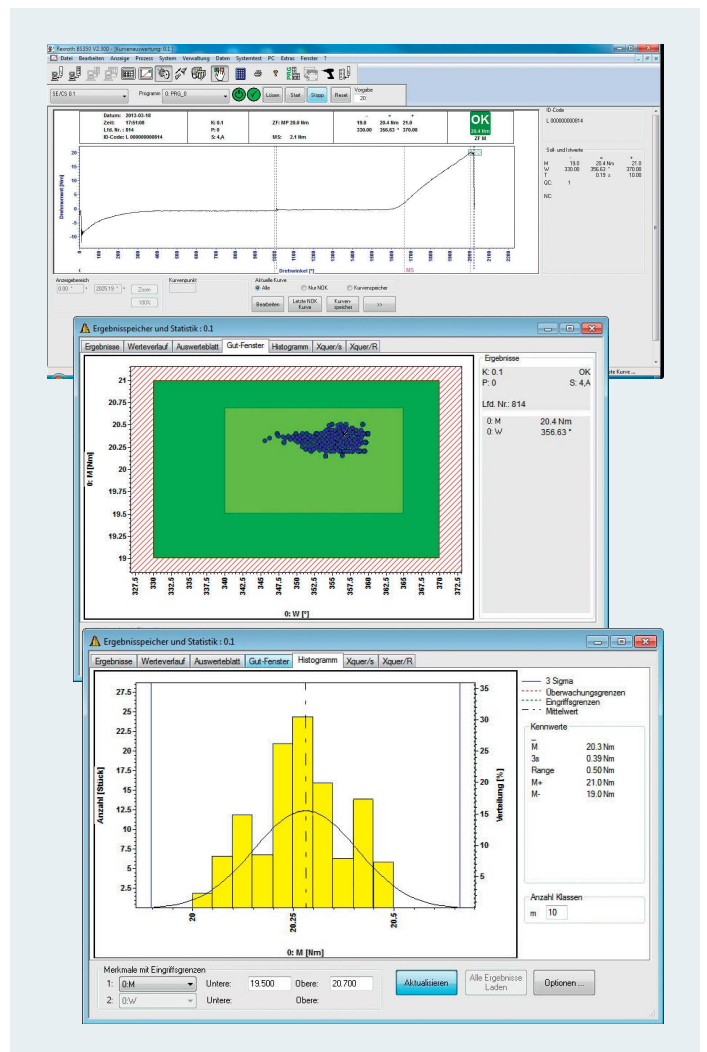


BS350 operating system

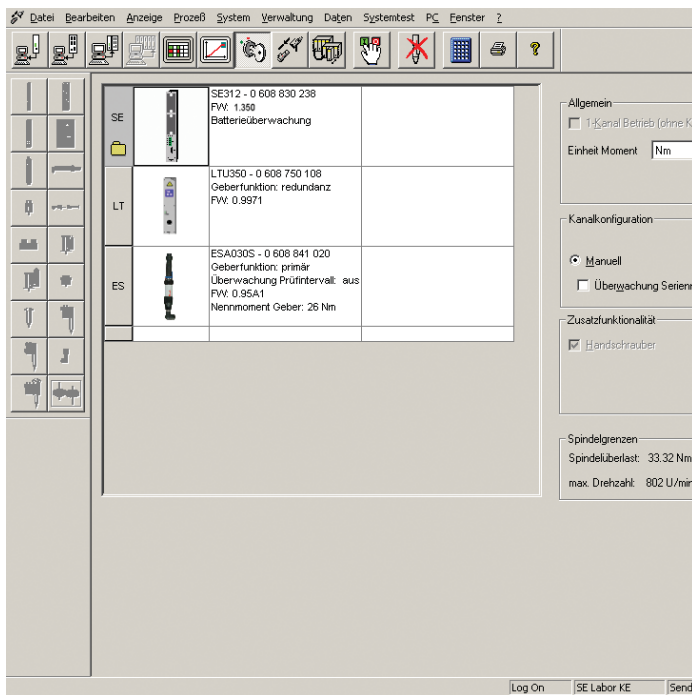


- Software for actuation, programming, and monitoring of tightening processes

Intuitive, reliable tightening processes


System installation and programming of individual tightening tasks is done via convenient, icon-supported tools. Tightening processes are configured on the graphic interface.

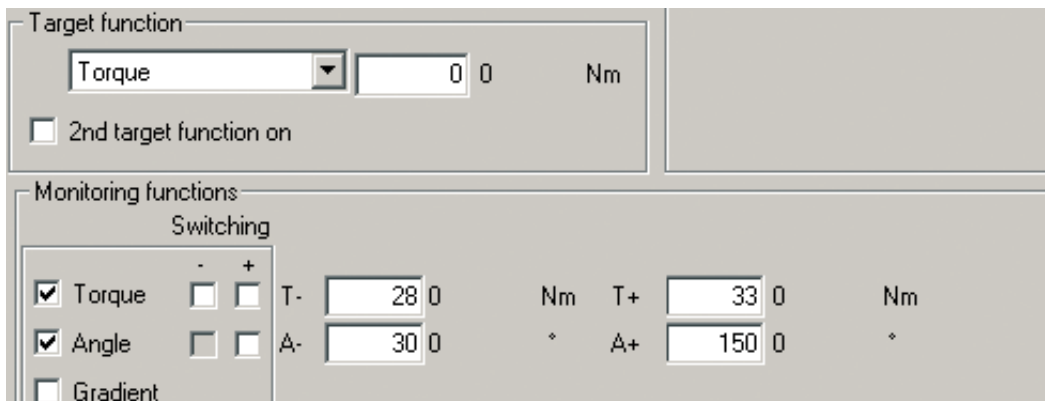


You can easily enter target and monitoring parameters in the preset windows.

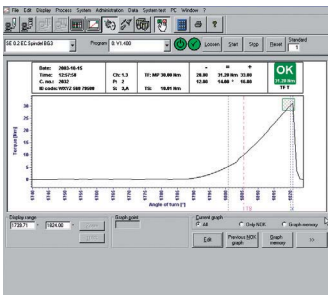

Graph
The tightening graph helps you quickly analyze tightening cases.

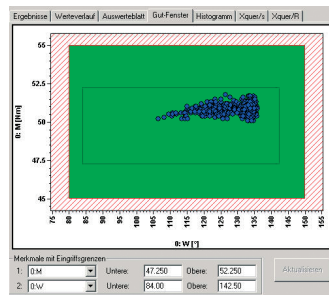

Good range window
The good range window clearly shows you the location of tightening results in the target window.

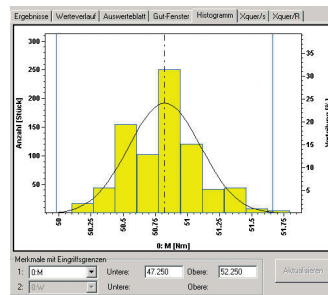

Histogram
The histogram gives you a quick overview of the statistical distribution of the tightening results.

Results window
Internal results memory of up to 40,000 tightening results and filter search functionality.

System requirements

BS350 V2.400: Windows XP, Vista or Windows 7.

BS350 V2.500: Windows 7, Windows 8, Windows 8.1 and Windows 10.

Pentium®, or compatible microprocessors. Connection to tightening system: via USB or Ethernet.

Rexroth is constantly adapting its products to meet the latest technological standards and thus retains the right to change its software and firmware. Find out about the latest software as well as software and firmware updates on the Internet at: www.boschrexroth.com/tightening




Code	Order no.	Sprachversionen
BS350 V2.400 1*	0608830303	de/en/fr/it/es/pt/cs/hu/sk/pl/ru/zh
BS350 V2.400 2**	0608830304	de/en/fr/it/es/pt/cs/hu/sk/pl/ru/zh
BS350 V2.400 3***	0608830305	de/en/fr/it/es/pt/cs/hu/sk/pl/ru/zh

* 1-fach-Lizenz
** 10-fach-Lizenz
*** Werkslizenz

de = German	es = Spanish	sk = Slovakian
fr = French	pt = Portuguese	pl = Polish
it = Italian	cs = Czech	ru = Russian
en = (US-) English	hu = Hungarian	zh = Simplified Chinese

IndraWorks – the tool for all engineering tasks

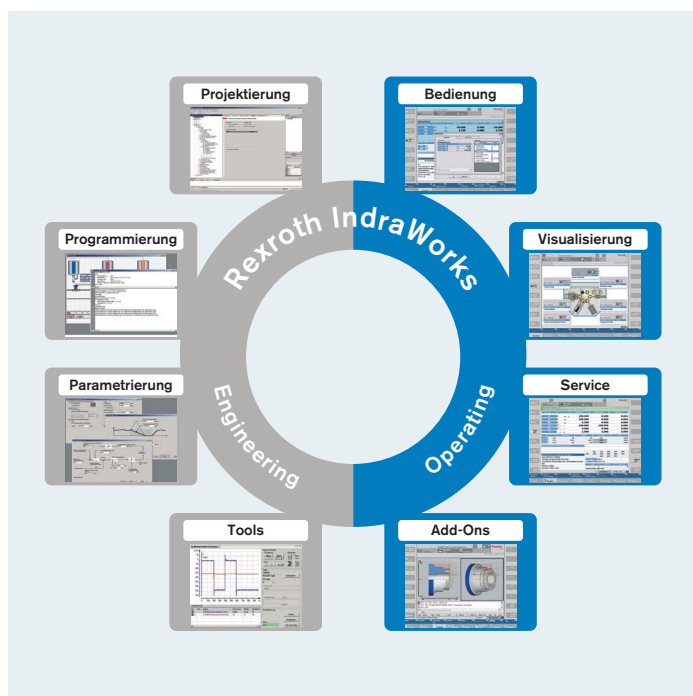

- ▶ Engineering framework for all Rexroth automation systems
- ▶ The tool for all engineering tasks




Features

- ▶ Available for all systems and solutions from Rexroth
- ▶ Integrated framework for all engineering tasks
- ▶ Consistent operating environment for project planning, programming, visualization, and diagnostics
- ▶ Central project management with intuitive system navigation
- ▶ Intelligent operation with wizard support
- ▶ Comprehensive online help
- ▶ Uniform programming according to the PLC standard IEC 61131-3
- ▶ PLCopen-conform function block and technology libraries
- ▶ Standardized interfaces for communication
- ▶ Transparent access to all system components
- ▶ Integrated FDT/DTM interface for integration of the DTM of third-party manufacturers

Rexroth IndraWorks allows you to solve all tasks in a uniform and intuitive software environment – from project planning and programming to visualization and diagnostics.

The uniform engineering framework IndraWorks is consistently available for all systems from Rexroth. You, as user, profit from fast and transparent access to all functions and system data of the automation components.

The standardized tools and interfaces help you to solve all engineering tasks centrally with a single software.



Project development

The overall system is uniformly and consistently projected for all solutions. User and multi-project management are available in all instances. The project and device explorers provide access to all system components. With its clearly organized dialog boxes, IndraWorks guides you intuitively through the configuration of your system.

Programming

The IndraLogic runtime system that is integrated in all solutions is consistently programmed in IndraWorks. The complete language scope specified in IEC 61131-3 is available. System-specific additional functions, such as motion blocks according to PLCopen or technology blocks, can be quickly and transparently implemented in your logic programs.

Tools


The tools for all engineering tasks are integrated in IndraWorks. Additional solutions-specific tools are consistently available in the software framework.

Beschreibung	Typenschlüssel	Order no.
IndraWorks for 350 Tightening System	SWA-IWORKS-ML*-12VRS-D0-DVD**	R 911 334 632

You can find information on IndraWorks for the 350 Tightening System in the Internet at www.boschrexroth.com/tightening.

Rexroth Service - the Original! Your expert for professional service.

As a full-service provider of industrial applications for the following technologies Bosch Rexroth not only offers a comprehensive product portfolio, but also a broad range of worldwide services meeting high quality requirements.

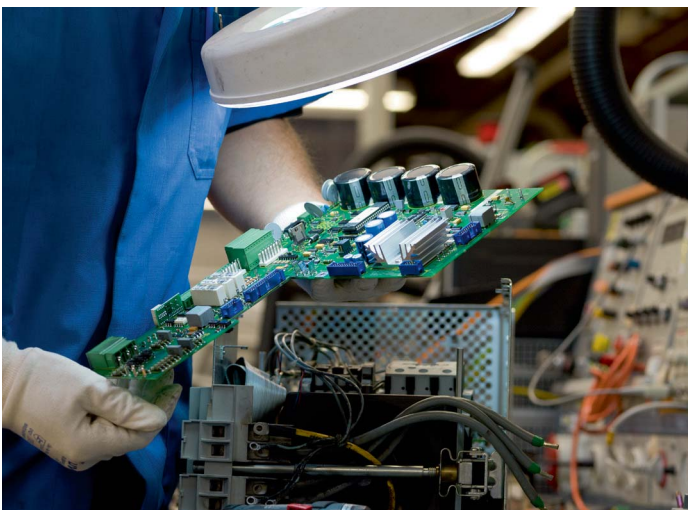


In every project involving machines and plants Rexroth follows a holistic approach, because in the long run only the systematic use of service measures can ensure maximum availability. In complex systems outages and downtimes can be best minimized by means of continuous maintenance: Components have to be replaced before they reach critical conditions.

Bosch Rexroth employs about 2,000 perfectly trained service experts at 160 service centers in 80 countries. This facilitates direct and local communication and enables short reaction times. The specialists are able to reliably and quickly repair, maintain, and modernize even heterogeneous machine parks to manufacturer quality. In addition, specially trained and experienced service experts offer consulting and support to machine manufacturers and end-users regarding the topics modernization, energy-efficiency and machine safety for the machine park.

Rexroth Service ensures a consistently high quality standard and a lively exchange of experience between service technicians across national borders. The dense network of regional service branch offices allows for the quick execution of repair, maintenance, and modernization measures. Plant operators also benefit from short reaction times and the quick availability of spare parts and components.

Rexroth Service supports end-users and machine manufacturers during the entire life-cycle of their machines and installations. This enables the operators to save costs and to significantly increase the availability and efficiency of their systems.

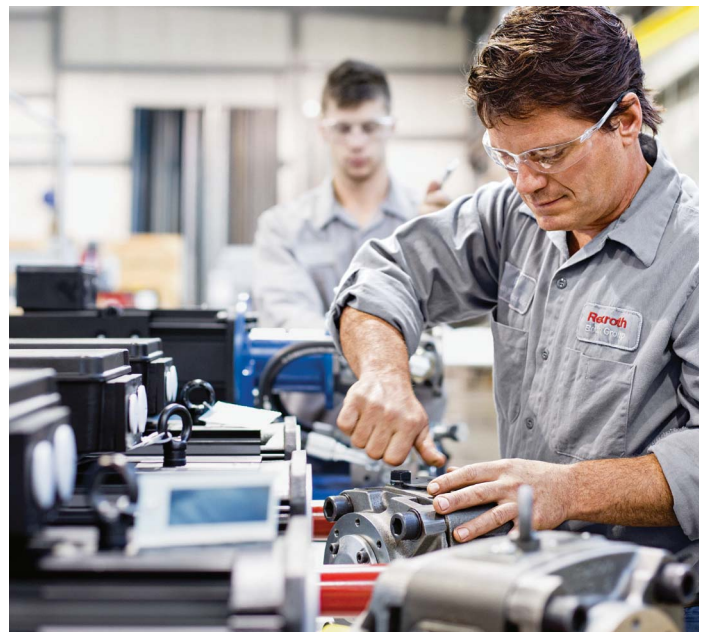

Technologies:

- ▶ Hydraulics (Pumps, Valves, Filters, Accessories etc.)
- ▶ Large Hydraulic Drives and Large Hydraulic Cylinders
- ▶ Electric Drives and Controls, Tightening and Welding Systems
- ▶ Linear and Assembly Technology
- ▶ Multitechnology Systems (e. g. Sytronix)

The service-portfolio from Rexroth

- | | |
|-----------------------|--------------------|
| ▶ Consulting | ▶ Product overhaul |
| ▶ Spare parts service | ▶ Repair service |
| ▶ Field service | ▶ Retrofitting |




Further Information available at:
www.boschrexroth.com/service

Rating of a tightening connection

The basic value for the rating of a tightening connection is the clamp force required to ensure the functioning of the tightening connection. Clamp force F_k must always be greater than the acting force F_A to be expected in operation ($F_k > F_A$).

The maximum number of bolts and their maximum thread value result from the design conditions, i.e. the space available for the bolts. A maximum permissible force of F_{max} can be calculated taking into consideration the stress cross-section of the bolt and the number of bolts. With currently available technology it is not possible to directly measure the clamp force (pretensioned force) during the tightening process. Therefore, it is necessary to rely on torque and angle of turn instead.

Especially in the case of torque-controlled tightening processes the clamp force is strongly influenced by the friction under the bolt head and in the threads. A tightening connection should be designed so that the minimal attainable pretensioned force F_{Mmin} guarantees the functioning of the tightening connection, but the maximum pretensioned force F_{Mmax} does not destroy the tightening connection or bolt. In order to be able to make a statement as to how the cited values will affect the mounting clamp force, the tightening factor $\alpha A = \frac{F_{Mmax}}{F_{Mmin}}$ was established in VDI 2230.



Example:
M10 DIN 912-12 g μ total = 0.14-0.18

Clamping force table according to VDI 2230

Size	Prop. class	Mounting clamp forces $F_{M Tab}$ in kN für $\mu_G =$							Tightening torques M_A in Nm für $\mu_K = \mu_G =$						
		0.08	0.10	0.12	0.14	0.16	0.20	0.24	0.08	0.10	0.12	0.14	0.16	0.20	0.24
M4	8.8	4.6	4.5	4.4	4.3	4.2	3.9	3.7	2.3	2.6	3.0	3.3	3.6	4.1	4.5
	10.9	6.8	6.7	6.5	6.3	6.1	5.7	5.4	3.3	3.9	4.6	4.8	5.3	6.0	6.6
	12.9	8.0	7.8	7.6	7.4	7.1	6.7	6.3	3.9	4.5	5.1	5.6	6.2	7.0	7.8
M5	8.8	7.6	7.4	7.2	7.0	6.8	6.4	6.0	4.4	5.2	5.9	6.5	7.1	8.1	9.0
	10.9	11.1	10.8	10.6	10.3	10.0	9.4	8.8	6.5	7.6	8.6	9.5	10.4	11.9	13.2
	12.9	13.0	12.7	12.4	12.0	11.7	11.0	10.3	7.6	8.9	10.0	11.2	12.2	14.0	15.5
M6	8.8	10.7	10.4	10.2	9.9	9.6	9.0	8.4	7.7	9.0	10.1	11.3	12.3	14.1	15.6
	10.9	15.7	15.3	14.9	14.5	14.1	13.2	12.4	11.3	13.2	14.9	16.5	18.0	20.7	22.9
	12.9	18.4	17.9	17.5	17.0	16.5	15.5	14.5	13.2	15.4	17.4	19.3	21.1	24.2	26.8
M7	8.8	15.5	15.1	14.8	14.4	14.0	13.1	12.3	12.6	14.8	16.8	18.7	20.5	23.6	26.2
	10.9	22.7	22.5	21.7	21.1	20.5	19.3	18.1	18.5	21.7	24.7	27.5	30.1	34.7	38.5
	12.9	26.6	26.0	25.4	24.7	24.0	22.6	21.2	21.6	25.4	28.9	32.2	35.2	40.6	45.1
M8	8.8	19.5	19.1	18.6	18.1	17.6	16.5	15.5	18.5	21.6	24.6	27.3	29.8	34.3	38.0
	10.9	28.7	28.0	27.3	26.6	25.8	24.3	22.7	27.2	31.8	36.1	40.1	43.8	50.3	55.8
	12.9	33.6	32.8	32.0	31.1	30.2	28.4	26.6	31.8	37.2	42.2	46.9	51.2	58.9	65.3
M10	8.8	31.0	30.3	29.6	28.8	27.9	26.3	24.7	36	43	48	54	59	68	75
	10.9	45.6	44.5	43.4	42.2	41.0	38.6	36.2	53	63	71	79	87	100	110
	12.9	53.3	52.1	50.8	49.4	48.0	45.2	42.4	62	73	83	93	101	116	129
M12	8.8	45.2	44.1	43.0	41.9	40.7	38.3	35.9	63	73	84	93	102	117	130
	10.9	66.3	64.8	63.2	61.5	59.8	56.3	52.8	92	108	123	137	149	172	191
	12.9	77.6	75.9	74.0	72.0	70.0	65.8	61.8	108	126	144	160	175	201	223
M14	8.8	62.0	60.6	59.1	57.5	55.9	52.6	49.3	100	117	133	148	162	187	207
	10.9	91.0	88.9	86.7	84.4	82.1	77.2	72.5	146	172	195	218	238	274	304
	12.9	106.5	104.1	101.5	98.8	96.0	90.4	84.8	171	201	229	255	279	321	356
M16	8.8	84.7	82.9	80.9	78.8	76.6	72.2	67.8	153	180	206	230	252	291	325
	10.9	124.4	121.7	118.8	115.7	112.6	106.1	99.6	224	264	302	338	370	428	477
	12.9	145.5	142.4	139.0	135.4	131.7	124.1	116.6	262	309	354	395	433	501	558
M18	8.8	107	104	102	99	96	91	85	220	259	295	329	360	415	462
	10.9	152	149	145	141	137	129	121	314	369	421	469	513	592	657
	12.9	178	174	170	165	160	151	142	367	432	492	549	601	692	769
M20	8.8	136	134	130	127	123	116	109	308	363	415	464	509	588	655
	10.9	194	190	186	181	176	166	156	438	517	592	661	725	838	933
	12.9	227	223	217	212	206	194	182	513	605	692	773	848	980	1092
M22	8.8	170	166	162	158	154	145	137	417	495	567	634	697	808	901
	10.9	242	237	231	225	219	207	194	595	704	807	904	993	1151	1284
	12.9	283	277	271	264	257	242	228	696	824	945	1057	1162	1347	1502
M24	8.8	196	192	188	183	178	168	157	529	625	714	798	875	1011	1126
	10.9	280	274	267	260	253	239	224	754	890	1017	1136	1246	1440	1604
	12.9	327	320	313	305	296	279	262	882	1041	1190	1329	1458	1685	1877
M27	8.8	257	252	246	240	234	220	207	772	915	1050	1176	1292	1498	1672
	10.9	367	359	351	342	333	314	295	1100	1304	1496	1674	1840	2134	2381
	12.9	429	420	410	400	389	367	345	1287	1526	1750	1959	2153	2497	2787

Guide values for clamp forces (FM) and tightening torques (MA) for headless bolts with metric coarse-pitch threads according to DIN ISO 262 and head dimensions

for hexagon bolts according to DIN EN ISO 4014 to 4018 or fillister head bolts according to DIN EN ISO 4762, and "central" hole according to DIN EN 20 273.


Glossary

Output drive	Spindle components that include the tightening tool (e.g. tightening nut).	Spindle bearing	Output drive component with straight spline shaft which supports the tightening tool (e.g. tightening nut).
Multiple connections	Minimum permissible distance between the tightening positions.	Gradient	Inclination of a tangent in the torque/angle of turn graph.
Working range	Permissible torque range of tightening spindle/ErgoSpin.	Handling device	Manually-operated, hand-held tightening modules which the worker uses to approach the tightening position and carry out the tightening operation without exerting any force. Depending on the design, the handling device can also support the reverse torque (reaction torques).
Size (BG)	Tightening spindles are available in sizes 2 – 5, the sizes cover different working ranges.	IEC 61131-3	Internationally recognized standard for programming languages of programmable logic controllers.
Block output drive	Single housing combines multiple output drive spindles for tight bolt patterns.	Max. output drive speed	Defined by the interaction of EC motor, planetary gearbox and output drive.
DVI	Digital Visual Interface – interface for the digital transfer of video data.	Measurement transducer	Spindle component that analyzes the torque, angle, and gradient and is equipped with an integrated cycle counter.
I/O	Input/output – I/O are discrete interfaces for sending and receiving digital signals.	Redundant Measurement transducer	At least two independent measurement transducers that continually record the same parameters.
EC motor	Electronic Commutated motor – a brushless, and thus maintenance-free, motor.	Center-to-center distance	See multiple connections
ErgoSpin	Hand-held nutrunner from Rexroth with tool cable.	Tightening case analysis	Analysis of torque and angle-of-turn measurements taken during tightening, on the basis of which conclusions about the tightening process and the quality of the tightening connection can be made.
Spring force	The spring force of an output drive describes the force required to completely compress (F_{max}) the pre-tensioned spline shaft (F_{min}) of an output drive.		
Range of spring	Travel output which results from engaging the tightening module and tightening until the screw-in depth is reached.		
Crowfoot wrench	Special components designed for very tight and hard-to-reach tightening positions.		

Tightening channel	Includes all components required for a tightening job: tightening spindle or ErgoSpin hand-held nutrunner, connection cable, as well as control and power electronics.	System Stick	A USB stick included in the scope of delivery that contains, among other things, the installation program for the BS350 Operating System and the system documentation.
Tightening program	Controls the tightening process and is divided into various tightening steps, where tightening parameters are set.	Avg. efficiency	Quotient calculated from output drive performance and drive performance. The output drive performance and drive performance depend on the speed and torque, which is why efficiency is not constant.
Tightening spindle	Comprises an output drive unit, measurement transducer and a gearbox-motor combination for the drive and is used with hand-held and automatic tightening tasks.	Offset output drive	Output drive component for tight center to center distances where the spline shaft and drive unit are offset.
Tightening station	Hand-held, manually-operated, or automatic tightenings are carried out on a tightening station. It can be a part of an assembly line.	Feed output drive	Output drive component for deep-seated tightening positions (e.g. motor plugs).
Tightening position	Refers to the defined location where the tightening job is performed using a tightening channel and a tightening program.	Tool mount	Interface between the tightening spindle and tool. For example, a square is a typical tool mount for a tightening nut as a tool.
Tightening system	A complete system with all of the tightening channels that are needed to carry out the defined tightening case. It communicates with a superior controller.	Angle head	Output drive components which are used from above, usually on the hand-held nutrunner, if there is limited space available (e.g. inner housing tightening).
IP54 protection class	Suitability of components for certain ambient conditions, e.g. for industrial systems. IP54 refers to the protection against splash water and dust.	Feed gripper	Component used to store and supply bolts to the tightening tool.
Socket tray	Container for various tool inserts. Corresponding tightening programs are activated when the tools are removed		
Controllers	Controls and monitors the tightening process or exchanges data with superior controllers.		

Further information

Further information about Bosch Rexroth products and services are available online.



Online Product Catalog

Besides of the CAD data, here you can find the firmware service packs for downloading.
www.boschrexroth.com/tightening



Rexroth Media Directory

The Rexroth Media Directory is your 24/7 source for promotional media and technical documentation. Search and download information.
www.boschrexroth.com/mediadirectory

Rexroth eBusiness Portal

The product support area of the Rexroth eBusiness Portal offers you further information in the form of homologation, project planning, technical information as well as firmware updates. Please inform your responsible sales contact about your registration in our portal. The product support area must be unlocked separately.

Notes

Bosch Rexroth AG

Fornsbacher Straße 92
71540 Murrhardt, Germany
www.boschrexroth.com/tightening

How can we help you?

Contact us at the following email address:

RFQ.Tightening@boschrexroth.de